



**MIPS64® Architecture for Programmers
Volume IV-a: The MIPS16e™ Application-
Specific Extension to the MIPS64®
Architecture**

Document Number: MD00077

Revision 2.60

June 25, 2008

**MIPS Technologies, Inc.
1225 Charleston Road
Mountain View, CA 94043-1353**

Copyright © 2005 MIPS Technologies Inc. All rights reserved.

Copyright © 2005 MIPS Technologies, Inc. All rights reserved.

Unpublished rights (if any) reserved under the copyright laws of the United States of America and other countries.

This document contains information that is proprietary to MIPS Technologies, Inc. ("MIPS Technologies"). Any copying, reproducing, modifying or use of this information (in whole or in part) that is not expressly permitted in writing by MIPS Technologies or an authorized third party is strictly prohibited. At a minimum, this information is protected under unfair competition and copyright laws. Violations thereof may result in criminal penalties and fines.

Any document provided in source format (i.e., in a modifiable form such as in FrameMaker or Microsoft Word format) is subject to use and distribution restrictions that are independent of and supplemental to any and all confidentiality restrictions. UNDER NO CIRCUMSTANCES MAY A DOCUMENT PROVIDED IN SOURCE FORMAT BE DISTRIBUTED TO A THIRD PARTY IN SOURCE FORMAT WITHOUT THE EXPRESS WRITTEN PERMISSION OF MIPS TECHNOLOGIES, INC.

MIPS Technologies reserves the right to change the information contained in this document to improve function, design or otherwise. MIPS Technologies does not assume any liability arising out of the application or use of this information, or of any error or omission in such information. Any warranties, whether express, statutory, implied or otherwise, including but not limited to the implied warranties of merchantability or fitness for a particular purpose, are excluded. Except as expressly provided in any written license agreement from MIPS Technologies or an authorized third party, the furnishing of this document does not give recipient any license to any intellectual property rights, including any patent rights, that cover the information in this document.

The information contained in this document shall not be exported, reexported, transferred, or released, directly or indirectly, in violation of the law of any country or international law, regulation, treaty, Executive Order, statute, amendments or supplements thereto. Should a conflict arise regarding the export, reexport, transfer, or release of the information contained in this document, the laws of the United States of America shall be the governing law.

The information contained in this document constitutes one or more of the following: commercial computer software, commercial computer software documentation or other commercial items. If the user of this information, or any related documentation of any kind, including related technical data or manuals, is an agency, department, or other entity of the United States government ("Government"), the use, duplication, reproduction, release, modification, disclosure, or transfer of this information, or any related documentation of any kind, is restricted in accordance with Federal Acquisition Regulation 12.212 for civilian agencies and Defense Federal Acquisition Regulation Supplement 227.7202 for military agencies. The use of this information by the Government is further restricted in accordance with the terms of the license agreement(s) and/or applicable contract terms and conditions covering this information from MIPS Technologies or an authorized third party.

MIPS, MIPS I, MIPS II, MIPS III, MIPS IV, MIPS V, MIPS-3D, MIPS16, MIPS16e, MIPS32, MIPS64, MIPS-Based, MIPSsim, MIPSpro, MIPS Technologies logo, MIPS-VERIFIED, MIPS-VERIFIED logo, 4K, 4Kc, 4Km, 4Kp, 4KE, 4KEc, 4KEm, 4KEp, 4KS, 4KSc, 4KSd, M4K, 5K, 5Kc, 5Kf, 24K, 24Kc, 24Kf, 24KE, 24KEc, 24KEf, 34K, 34Kc, 34Kf, 74K, 74Kc, 74Kf, 1004K, 1004Kc, 1004Kf, R3000, R4000, R5000, ASMACRO, Atlas, "At the core of the user experience.", BusBridge, Bus Navigator, CLAM, CorExtend, CoreFPGA, CoreLV, EC, FPGA View, FS2, FS2 FIRST SILICON SOLUTIONS logo, FS2 NAVIGATOR, HyperDebug, HyperJTAG, JALGO, Logic Navigator, Malta, MDMX, MED, MGB, OCI, PDtrace, the Pipeline, Pro Series, SEAD, SEAD-2, SmartMIPS, SOC-it, System Navigator, and YAMON are trademarks or registered trademarks of MIPS Technologies, Inc. in the United States and other countries.

All other trademarks referred to herein are the property of their respective owners.

Template: nB1.03, Built with tags: 2B ARCH FPU_PS FPU_PSandARCH MIPS64

MIPS64® Architecture for Programmers Volume IV-a: The MIPS16e™ Application-Specific Extension to the MIPS64® Architecture, Revision 2.60

Copyright © 2005 MIPS Technologies Inc. All rights reserved.

Contents

Chapter 1: About This Book	11
1.1: Typographical Conventions	11
1.1.1: Italic Text	11
1.1.2: Bold Text	11
1.1.3: Courier Text	12
1.2: UNPREDICTABLE and UNDEFINED	12
1.2.1: UNPREDICTABLE	12
1.2.2: UNDEFINED	12
1.2.3: UNSTABLE	13
1.3: Special Symbols in Pseudocode Notation	13
1.4: For More Information	15
Chapter 1: Guide to the Instruction Set	17
1.1: Understanding the Instruction Fields	17
1.1.1: Instruction Fields	19
1.1.2: Instruction Descriptive Name and Mnemonic	19
1.1.3: Format Field	19
1.1.4: Purpose Field	20
1.1.5: Description Field	20
1.1.6: Restrictions Field	20
1.1.7: Operation Field	21
1.1.8: Exceptions Field	21
1.1.9: Programming Notes and Implementation Notes Fields	22
1.2: Operation Section Notation and Functions	22
1.2.1: Instruction Execution Ordering	22
1.2.2: Pseudocode Functions	22
1.3: Op and Function Subfield Notation	32
1.4: FPU Instructions	32
Chapter 1: The MIPS16e™ Application-Specific Extension to the MIPS64® Architecture	33
1.1: Base Architecture Requirements	33
1.2: Software Detection of the ASE	33
1.3: Compliance and Subsetting	33
1.4: MIPS16e Overview	33
1.5: MIPS16e ASE Features	34
1.6: MIPS16e Register Set	34
1.7: MIPS16e ISA Modes	36
1.7.1: Modes Available in the MIPS16e Architecture	36
1.7.2: Defining the ISA Mode Field	36
1.7.3: Switching Between Modes When an Exception Occurs	36
1.7.4: Using MIPS16e Jump Instructions to Switch Modes	37
1.8: JALX, JR, JR.HB, JALR and JALR.HB Operations in MIPS16e and MIPS32 Mode	37
1.9: MIPS16e Instruction Summaries	38
1.10: MIPS16e PC-Relative Instructions	41
1.11: MIPS16e Extensible Instructions	42
1.12: MIPS16e Implementation-Definable Macro Instructions	43
1.13: MIPS16e Jump and Branch Instructions	44

1.14: MIPS16e Instruction Formats	44
1.14.1: I-type instruction format.....	45
1.14.2: RI-type instruction format.....	45
1.14.3: RR-type instruction format	45
1.14.4: RRI-type instruction format	45
1.14.5: RRR-type instruction format.....	45
1.14.6: RRI-A type instruction format	45
1.14.7: Shift instruction format	45
1.14.8: I8-type instruction format.....	45
1.14.9: I8_MOVR32 instruction format (used only by the MOVR32 instruction).....	46
1.14.10: I8_MOV32R instruction format (used only by MOV32R instruction).....	46
1.14.11: I8_SVRS instruction format (used only by the SAVE and RESTORE instructions).....	46
1.14.12: I64-type instruction format.....	46
1.14.13: RI64-type instruction format	46
1.14.14: JAL and JALX instruction format.....	46
1.14.15: EXT-I instruction format	46
1.14.16: ASMACRO instruction format	46
1.14.17: EXT-RI instruction format.....	47
1.14.18: EXT-RRI instruction format	47
1.14.19: EXT-RRI-A instruction format.....	47
1.14.20: EXT-SHIFT instruction format.....	47
1.14.21: EXT-I8 instruction format	47
1.14.22: EXT-I8_SVRS instruction format (used only by the SAVE and RESTORE instructions).....	47
1.14.23: EXT-I64 instruction format	47
1.14.24: EXT-RI64 instruction format.....	47
1.14.25: EXT-SHIFT64 instruction format.....	48
1.15: Instruction Bit Encoding.....	48
1.16: MIPS16e Instruction Stream Organization and Endianness	51
1.17: MIPS16e Instruction Fetch Restrictions	51

Chapter 1: The MIPS16e™ ASE Instruction Set..... 53

1.1: MIPS16e™ Instruction Descriptions.....	53
1.1.1: Pseudocode Functions Specific to MIPS16e™.....	53
ADDIU	54
ADDIU	55
ADDIU	56
ADDIU	57
ADDIU	58
ADDIU	59
ADDIU	60
ADDIU	61
ADDIU	62
ADDIU	63
ADDU	64
AND.....	65
ASMACRO	66
B	67
B	68
BEQZ.....	69
BEQZ.....	70
BNEZ.....	71
BNEZ.....	72
BREAK	73

BTEQZ	74
BTEQZ	75
BTNEZ	76
BTNEZ	77
CMP	78
CMPI	79
CMPI	80
DADDIU	81
DADDIU	82
DADDIU	83
DADDIU	84
DADDIU	85
DADDIU	86
DADDIU	87
DADDIU	88
DADDIU	89
DADDIU	90
DADDU	91
DDIV	92
DDIVU	93
DIV	94
DIVU	96
DMULT	97
DMULTU	98
DSLL	99
DSLL	100
DSLLV	101
DSRA	102
DSRA	103
DSRAV	104
DSRL	105
DSRL	106
DSRLV	107
DSUBU	108
JAL	109
JALR	110
JALRC	111
JALX	112
JALX	113
JR	114
JR	115
JRC	116
JRC	117
LB	118
LB	119
LBU	120
LBU	121
LD	122
LD	123
LD	124
LD	125
LD	126
LD	127

LH.....	128
LH.....	129
LHU	130
LHU	131
LI	132
LI	133
LW.....	134
LW.....	135
LW.....	136
LW.....	137
LW.....	138
LW.....	139
LWU	140
LWU	141
MFHI.....	142
MFLO	143
MOVE.....	144
MOVE.....	145
MULT.....	146
MULTU	147
NEG.....	148
NOP.....	149
NOT.....	150
OR.....	151
RESTORE	152
RESTORE	154
SAVE.....	157
SAVE.....	159
SB.....	163
SB.....	164
SEB	165
SEH.....	166
SEW	167
SD	168
SD	169
SD	170
SP.....	171
SD	172
SD	173
SDBBP	174
SH	175
SH	176
SLL	177
SLL	178
SLLV.....	179
SLT.....	180
SLTI.....	181
SLTI.....	182
SLTIU	183
SLTIU	184
SLTU	185
SRA	186
SRA.....	187

SRAV.....	188
SRL.....	189
SRL.....	190
SRLV.....	191
SUBU.....	192
SW.....	193
SW.....	194
SW.....	195
SW.....	196
SW.....	197
SW.....	198
XOR.....	199
ZEB.....	200
ZEH.....	201
ZEW.....	202

Appendix A: Revision History	203
---	------------

Figures

Figure 1.1: Example of Instruction Description	18
Figure 1.2: Example of Instruction Fields	19
Figure 1.3: Example of Instruction Descriptive Name and Mnemonic	19
Figure 1.4: Example of Instruction Format	19
Figure 1.5: Example of Instruction Purpose	20
Figure 1.6: Example of Instruction Description	20
Figure 1.7: Example of Instruction Restrictions.....	21
Figure 1.8: Example of Instruction Operation.....	21
Figure 1.9: Example of Instruction Exception.....	21
Figure 1.10: Example of Instruction Programming Notes	22
Figure 1.11: COP_LW Pseudocode Function	23
Figure 1.12: COP_LD Pseudocode Function.....	23
Figure 1.13: COP_SW Pseudocode Function.....	23
Figure 1.14: COP_SD Pseudocode Function	24
Figure 1.15: CoprocessorOperation Pseudocode Function	24
Figure 1.16: AddressTranslation Pseudocode Function	24
Figure 1.17: LoadMemory Pseudocode Function	25
Figure 1.18: StoreMemory Pseudocode Function.....	25
Figure 1.19: Prefetch Pseudocode Function.....	26
Figure 1.20: SyncOperation Pseudocode Function	27
Figure 1.21: ValueFPR Pseudocode Function.....	27
Figure 1.22: StoreFPR Pseudocode Function	28
Figure 1.23: CheckFPEException Pseudocode Function.....	29
Figure 1.24: FPConditionCode Pseudocode Function.....	29
Figure 1.25: SetFPConditionCode Pseudocode Function	29
Figure 1.26: SignalException Pseudocode Function	30
Figure 1.27: SignalDebugBreakpointException Pseudocode Function.....	30
Figure 1.28: SignalDebugModeBreakpointException Pseudocode Function.....	30
Figure 1.29: NullifyCurrentInstruction PseudoCode Function	31
Figure 1.30: JumpDelaySlot Pseudocode Function	31
Figure 1.31: NotWordValue Pseudocode Function.....	31
Figure 1.32: PolyMult Pseudocode Function	31
Figure 1-1: Xlat Pseudocode Function.....	53

Tables

Table 1.1: Symbols Used in Instruction Operation Statements.....	13
Table 1.1: AccessLength Specifications for Loads/Stores	26
Table 1.1: MIPS16e General-Purpose Registers.....	35
Table 1.2: MIPS16e Special-Purpose Registers.....	35
Table 1.3: ISA Mode Bit Encodings	36
Table 1.4: MIPS16e Load and Store Instructions	38
Table 1.5: MIPS16e Save and Restore Instructions	38
Table 1.6: MIPS16e ALU Immediate Instructions	39
Table 1.7: MIPS16e Arithmetic One, Two or Three Operand Register Instructions	39
Table 1.8: MIPS16e Special Instructions	39
Table 1.9: MIPS16e Multiply and Divide Instructions.....	40
Table 1.10: MIPS16e Jump and Branch Instructions.....	40
Table 1.11: MIPS16e Shift Instructions.....	40
Table 1.12: Implementation-Definable Macro Instructions.....	41
Table 1.13: PC-Relative MIPS16e Instructions	41
Table 1.14: PC-Relative Base Used for Address Calculation	41
Table 1.15: MIPS16e Extensible Instructions	42
Table 1.16: MIPS16e Instruction Fields	44
Table 1.17: Symbols Used in the Instruction Encoding Tables.....	48
Table 1.18: MIPS16e Encoding of the Opcode Field	49
Table 1.19: MIPS16e JAL(X) Encoding of the x Field.....	49
Table 1.20: MIPS16e SHIFT Encoding of the f Field	49
Table 1.21: MIPS16e RRI-A Encoding of the f Field.....	49
Table 1.22: MIPS16e I8 Encoding of the funct Field.....	50
Table 1.23: MIPS16e RRR Encoding of the f Field.....	50
Table 1.24: MIPS16e RR Encoding of the Funct Field	50
Table 1.25: MIPS16e I64 Encoding of the funct Field.....	50
Table 1.26: MIPS16e I8 Encoding of the s Field when funct=SVRS	51
Table 1.27: MIPS16e RR Encoding of the ry Field when funct=J(AL)R(C).....	51
Table 1.28: MIPS16e RR Encoding of the ry Field when funct=CNVT	51

About This Book

The MIPS64® Architecture for Programmers Volume IV-a: The MIPS16e™ Application-Specific Extension to the MIPS64® Architecture comes as a multi-volume set.

- Volume I describes conventions used throughout the document set, and provides an introduction to the MIPS64® Architecture
- Volume II provides detailed descriptions of each instruction in the MIPS64® instruction set
- Volume III describes the MIPS64® Privileged Resource Architecture which defines and governs the behavior of the privileged resources included in a MIPS64® processor implementation
- Volume IV-a describes the MIPS16e™ Application-Specific Extension to the MIPS64® Architecture
- Volume IV-b describes the MDMX™ Application-Specific Extension to the MIPS64® Architecture
- Volume IV-c describes the MIPS-3D® Application-Specific Extension to the MIPS64® Architecture
- Volume IV-d describes the SmartMIPS® Application-Specific Extension to the MIPS32® Architecture and is not applicable to the MIPS64® document set

1.1 Typographical Conventions

This section describes the use of *italic*, **bold** and `courier` fonts in this book.

1.1.1 Italic Text

- is used for *emphasis*
- is used for *bits*, *fields*, *registers*, that are important from a software perspective (for instance, address bits used by software, and programmable fields and registers), and various *floating point instruction formats*, such as *S*, *D*, and *PS*
- is used for the memory access types, such as *cached* and *uncached*

1.1.2 Bold Text

- represents a term that is being **defined**
- is used for **bits** and **fields** that are important from a hardware perspective (for instance, **register** bits, which are not programmable but accessible only to hardware)

About This Book

- is used for ranges of numbers; the range is indicated by an ellipsis. For instance, **5..1** indicates numbers 5 through 1
- is used to emphasize **UNPREDICTABLE** and **UNDEFINED** behavior, as defined below.

1.1.3 Courier Text

Courier fixed-width font is used for text that is displayed on the screen, and for examples of code and instruction pseudocode.

1.2 UNPREDICTABLE and UNDEFINED

The terms **UNPREDICTABLE** and **UNDEFINED** are used throughout this book to describe the behavior of the processor in certain cases. **UNDEFINED** behavior or operations can occur only as the result of executing instructions in a privileged mode (i.e., in Kernel Mode or Debug Mode, or with the CPO usable bit set in the Status register). Unprivileged software can never cause **UNDEFINED** behavior or operations. Conversely, both privileged and unprivileged software can cause **UNPREDICTABLE** results or operations.

1.2.1 UNPREDICTABLE

UNPREDICTABLE results may vary from processor implementation to implementation, instruction to instruction, or as a function of time on the same implementation or instruction. Software can never depend on results that are **UNPREDICTABLE**. **UNPREDICTABLE** operations may cause a result to be generated or not. If a result is generated, it is **UNPREDICTABLE**. **UNPREDICTABLE** operations may cause arbitrary exceptions.

UNPREDICTABLE results or operations have several implementation restrictions:

- Implementations of operations generating **UNPREDICTABLE** results must not depend on any data source (memory or internal state) which is inaccessible in the current processor mode
- **UNPREDICTABLE** operations must not read, write, or modify the contents of memory or internal state which is inaccessible in the current processor mode. For example, **UNPREDICTABLE** operations executed in user mode must not access memory or internal state that is only accessible in Kernel Mode or Debug Mode or in another process
- **UNPREDICTABLE** operations must not halt or hang the processor

1.2.2 UNDEFINED

UNDEFINED operations or behavior may vary from processor implementation to implementation, instruction to instruction, or as a function of time on the same implementation or instruction. **UNDEFINED** operations or behavior may vary from nothing to creating an environment in which execution can no longer continue. **UNDEFINED** operations or behavior may cause data loss.

UNDEFINED operations or behavior has one implementation restriction:

- **UNDEFINED** operations or behavior must not cause the processor to hang (that is, enter a state from which there is no exit other than powering down the processor). The assertion of any of the reset signals must restore the processor to an operational state

1.2.3 UNSTABLE

UNSTABLE results or values may vary as a function of time on the same implementation or instruction. Unlike **UNPREDICTABLE** values, software may depend on the fact that a sampling of an **UNSTABLE** value results in a legal transient value that was correct at some point in time prior to the sampling.

UNSTABLE values have one implementation restriction:

- Implementations of operations generating **UNSTABLE** results must not depend on any data source (memory or internal state) which is inaccessible in the current processor mode

1.3 Special Symbols in Pseudocode Notation

In this book, algorithmic descriptions of an operation are described as pseudocode in a high-level language notation resembling Pascal. Special symbols used in the pseudocode notation are listed in [Table 1.1](#).

Table 1.1 Symbols Used in Instruction Operation Statements

Symbol	Meaning
\leftarrow	Assignment
$=, \neq$	Tests for equality and inequality
\parallel	Bit string concatenation
x^y	A y -bit string formed by y copies of the single-bit value x
$b\#n$	A constant value n in base b . For instance $10\#100$ represents the decimal value 100, $2\#100$ represents the binary value 100 (decimal 4), and $16\#100$ represents the hexadecimal value 100 (decimal 256). If the "b#" prefix is omitted, the default base is 10.
$0bn$	A constant value n in base 2. For instance $0b100$ represents the binary value 100 (decimal 4).
$0xn$	A constant value n in base 16. For instance $0x100$ represents the hexadecimal value 100 (decimal 256).
$x_{y..z}$	Selection of bits y through z of bit string x . Little-endian bit notation (rightmost bit is 0) is used. If y is less than z , this expression is an empty (zero length) bit string.
$+, -$	2's complement or floating point arithmetic: addition, subtraction
$*, \times$	2's complement or floating point multiplication (both used for either)
div	2's complement integer division
mod	2's complement modulo
$/$	Floating point division
$<$	2's complement less-than comparison
$>$	2's complement greater-than comparison
\leq	2's complement less-than or equal comparison
\geq	2's complement greater-than or equal comparison
nor	Bitwise logical NOR
xor	Bitwise logical XOR
and	Bitwise logical AND
or	Bitwise logical OR

Table 1.1 Symbols Used in Instruction Operation Statements (Continued)

Symbol	Meaning
GPRLEN	The length in bits (32 or 64) of the CPU general-purpose registers
$GPR[x]$	CPU general-purpose register x . The content of $GPR[0]$ is always zero. In Release 2 of the Architecture, $GPR[x]$ is a short-hand notation for $SGPR[SRSCtl_{CSS}, x]$.
$SGPR[s,x]$	In Release 2 of the Architecture, multiple copies of the CPU general-purpose registers may be implemented. $SGPR[s,x]$ refers to GPR set s , register x .
$FPR[x]$	Floating Point operand register x
$FCC[CC]$	Floating Point condition code CC . $FCC[0]$ has the same value as $COC[1]$.
$FPR[x]$	Floating Point (Coprocessor unit 1), general register x
$CPR[z,x,s]$	Coprocessor unit z , general register x , select s
CP2CPR[x]	Coprocessor unit 2, general register x
$CCR[z,x]$	Coprocessor unit z , control register x
CP2CCR[x]	Coprocessor unit 2, control register x
$COC[z]$	Coprocessor unit z condition signal
$Xlat[x]$	Translation of the MIPS16e GPR number x into the corresponding 32-bit GPR number
BigEndianMem	Endian mode as configured at chip reset (0 → Little-Endian, 1 → Big-Endian). Specifies the endianness of the memory interface (see LoadMemory and StoreMemory pseudocode function descriptions), and the endianness of Kernel and Supervisor mode execution.
BigEndianCPU	The endianness for load and store instructions (0 → Little-Endian, 1 → Big-Endian). In User mode, this endianness may be switched by setting the RE bit in the <i>Status</i> register. Thus, BigEndianCPU may be computed as (BigEndianMem XOR ReverseEndian).
ReverseEndian	Signal to reverse the endianness of load and store instructions. This feature is available in User mode only, and is implemented by setting the RE bit of the <i>Status</i> register. Thus, ReverseEndian may be computed as (SR _{RE} and User mode).
<i>LLbit</i>	Bit of virtual state used to specify operation for instructions that provide atomic read-modify-write. <i>LLbit</i> is set when a linked load occurs and is tested by the conditional store. It is cleared, during other CPU operation, when a store to the location would no longer be atomic. In particular, it is cleared by exception return instructions.
I , I+n , I-n :	This occurs as a prefix to <i>Operation</i> description lines and functions as a label. It indicates the instruction time during which the pseudocode appears to “execute.” Unless otherwise indicated, all effects of the current instruction appear to occur during the instruction time of the current instruction. No label is equivalent to a time label of I . Sometimes effects of an instruction appear to occur either earlier or later — that is, during the instruction time of another instruction. When this happens, the instruction operation is written in sections labeled with the instruction time, relative to the current instruction I , in which the effect of that pseudocode appears to occur. For example, an instruction may have a result that is not available until after the next instruction. Such an instruction has the portion of the instruction operation description that writes the result register in a section labeled I+1 . The effect of pseudocode statements for the current instruction labelled I+1 appears to occur “at the same time” as the effect of pseudocode statements labeled I for the following instruction. Within one pseudocode sequence, the effects of the statements take place in order. However, between sequences of statements for different instructions that occur “at the same time,” there is no defined order. Programs must not depend on a particular order of evaluation between such sections.

Table 1.1 Symbols Used in Instruction Operation Statements (Continued)

Symbol	Meaning						
PC	<p>The <i>Program Counter</i> value. During the instruction time of an instruction, this is the address of the instruction word. The address of the instruction that occurs during the next instruction time is determined by assigning a value to <i>PC</i> during an instruction time. If no value is assigned to <i>PC</i> during an instruction time by any pseudocode statement, it is automatically incremented by either 2 (in the case of a 16-bit MIPS16e instruction) or 4 before the next instruction time. A taken branch assigns the target address to the <i>PC</i> during the instruction time of the instruction in the branch delay slot.</p> <p>In the MIPS Architecture, the <i>PC</i> value is only visible indirectly, such as when the processor stores the restart address into a GPR on a jump-and-link or branch-and-link instruction, or into a Coprocessor 0 register on an exception. The <i>PC</i> value contains a full 64-bit address all of which are significant during a memory reference.</p>						
ISA Mode	<p>In processors that implement the MIPS16e Application Specific Extension, the <i>ISA Mode</i> is a single-bit register that determines in which mode the processor is executing, as follows:</p> <table border="1" data-bbox="602 667 1271 787"> <thead> <tr> <th>Encoding</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The processor is executing 32-bit MIPS instructions</td> </tr> <tr> <td>1</td> <td>The processor is executing MIIPS16e instructions</td> </tr> </tbody> </table> <p>In the MIPS Architecture, the <i>ISA Mode</i> value is only visible indirectly, such as when the processor stores a combined value of the upper bits of <i>PC</i> and the <i>ISA Mode</i> into a GPR on a jump-and-link or branch-and-link instruction, or into a Coprocessor 0 register on an exception.</p>	Encoding	Meaning	0	The processor is executing 32-bit MIPS instructions	1	The processor is executing MIIPS16e instructions
Encoding	Meaning						
0	The processor is executing 32-bit MIPS instructions						
1	The processor is executing MIIPS16e instructions						
PABITS	The number of physical address bits implemented is represented by the symbol PABITS. As such, if 36 physical address bits were implemented, the size of the physical address space would be $2^{\text{PABITS}} = 2^{36}$ bytes.						
SEGBITS	The number of virtual address bits implemented in a segment of the address space is represented by the symbol SEGBITS. As such, if 40 virtual address bits are implemented in a segment, the size of the segment is $2^{\text{SEGBITS}} = 2^{40}$ bytes.						
FP32RegistersMode	<p>Indicates whether the FPU has 32-bit or 64-bit floating point registers (FPRs). In MIPS32, the FPU has 32 32-bit FPRs in which 64-bit data types are stored in even-odd pairs of FPRs. In MIPS64, the FPU has 32 64-bit FPRs in which 64-bit data types are stored in any FPR.</p> <p>In MIPS32 implementations, FP32RegistersMode is always a 0. MIPS64 implementations have a compatibility mode in which the processor references the FPRs as if it were a MIPS32 implementation. In such a case FP32RegisterMode is computed from the FR bit in the <i>Status</i> register. If this bit is a 0, the processor operates as if it had 32 32-bit FPRs. If this bit is a 1, the processor operates with 32 64-bit FPRs. The value of FP32RegistersMode is computed from the FR bit in the <i>Status</i> register.</p>						
InstructionInBranchDelaySlot	Indicates whether the instruction at the Program Counter address was executed in the delay slot of a branch or jump. This condition reflects the <i>dynamic</i> state of the instruction, not the <i>static</i> state. That is, the value is false if a branch or jump occurs to an instruction whose PC immediately follows a branch or jump, but which is not executed in the delay slot of a branch or jump.						
SignalException(exception, argument)	Causes an exception to be signaled, using the exception parameter as the type of exception and the argument parameter as an exception-specific argument). Control does not return from this pseudocode function—the exception is signaled at the point of the call.						

1.4 For More Information

Various MIPS RISC processor manuals and additional information about MIPS products can be found at the MIPS URL:

<http://www.mips.com>

About This Book

Comments or questions on the MIPS64® Architecture or this document should be directed to

MIPS Architecture Group
MIPS Technologies, Inc.
1225 Charleston Road
Mountain View, CA 94043

or via E-mail to architecture@mips.com.

Guide to the Instruction Set


This chapter provides a detailed guide to understanding the instruction descriptions, which are listed in alphabetical order in the tables at the beginning of the next chapter.

1.1 Understanding the Instruction Fields

Figure 1.1 shows an example instruction. Following the figure are descriptions of the fields listed below:

- “Instruction Fields” on page 19
- “Instruction Descriptive Name and Mnemonic” on page 19
- “Format Field” on page 19
- “Purpose Field” on page 20
- “Description Field” on page 20
- “Restrictions Field” on page 20
- “Operation Field” on page 21
- “Exceptions Field” on page 21
- “Programming Notes and Implementation Notes Fields” on page 22

Figure 1.1 Example of Instruction Description

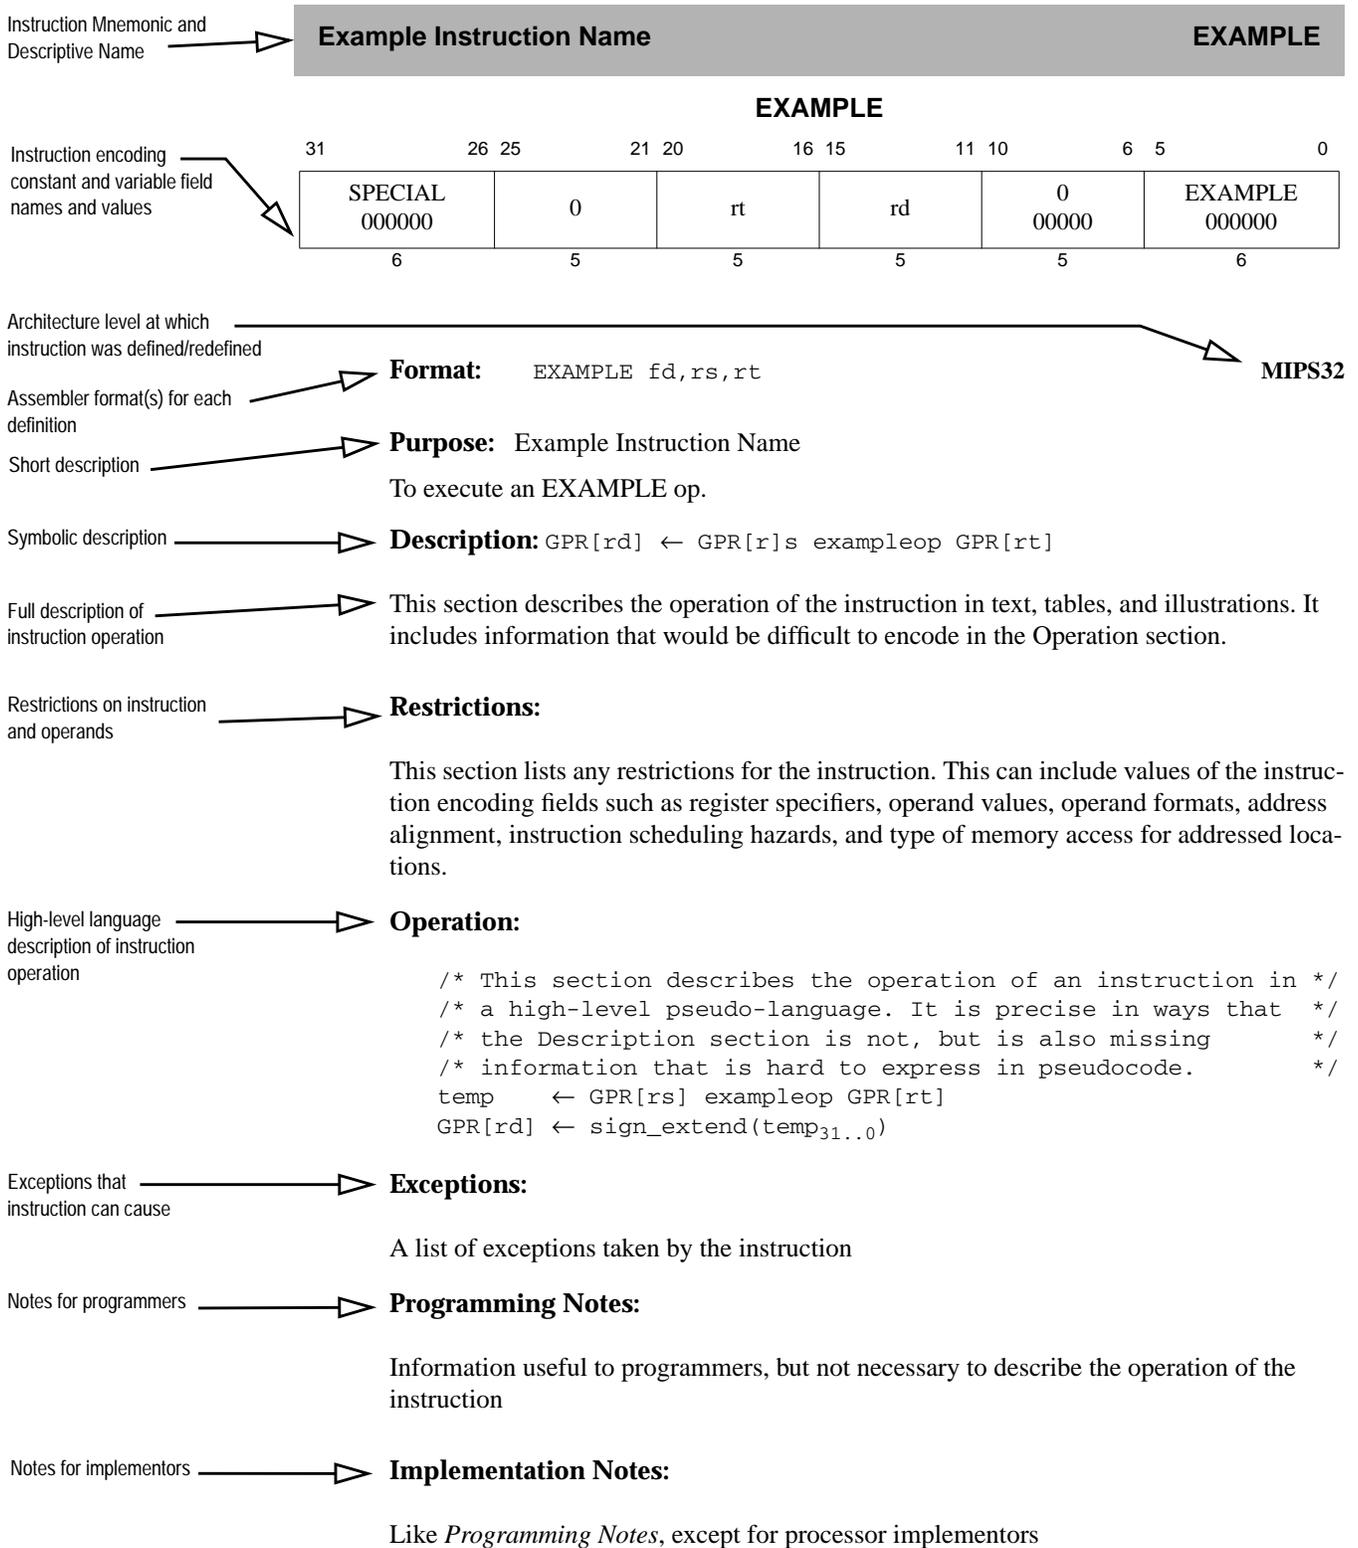


1.1.1 Instruction Fields

Fields encoding the instruction word are shown in register form at the top of the instruction description. The following rules are followed:

- The values of constant fields and the *opcode* names are listed in uppercase (SPECIAL and ADD in Figure 1.2). Constant values in a field are shown in binary below the symbolic or hexadecimal value.
- All variable fields are listed with the lowercase names used in the instruction description (*rs*, *rt*, and *rd* in Figure 1.2).
- Fields that contain zeros but are not named are unused fields that are required to be zero (bits 10:6 in Figure 1.2). If such fields are set to non-zero values, the operation of the processor is **UNPREDICTABLE**.

Figure 1.2 Example of Instruction Fields

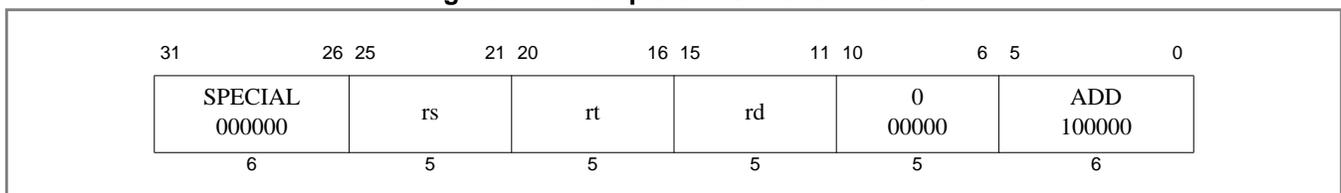

1.1.2 Instruction Descriptive Name and Mnemonic

The instruction descriptive name and mnemonic are printed as page headings for each instruction, as shown in Figure 1.3.

Figure 1.3 Example of Instruction Descriptive Name and Mnemonic



1.1.3 Format Field

The assembler formats for the instruction and the architecture level at which the instruction was originally defined are given in the *Format* field. If the instruction definition was later extended, the architecture levels at which it was extended and the assembler formats for the extended definition are shown in their order of extension (for an example, see C.cond.fmt). The MIPS architecture levels are inclusive; higher architecture levels include all instructions in previous levels. Extensions to instructions are backwards compatible. The original assembler formats are valid for the extended architecture.

Figure 1.4 Example of Instruction Format



The assembler format is shown with literal parts of the assembler instruction printed in uppercase characters. The variable parts, the operands, are shown as the lowercase names of the appropriate fields. The architectural level at which the instruction was first defined, for example “MIPS32” is shown at the right side of the page.

There can be more than one assembler format for each architecture level. Floating point operations on formatted data show an assembly format with the actual assembler mnemonic for each valid value of the *fmt* field. For example, the [ADD.fmt](#) instruction lists both ADD.S and ADD.D.

The assembler format lines sometimes include parenthetical comments to help explain variations in the formats (once again, see [C.cond.fmt](#)). These comments are not a part of the assembler format.

1.1.4 Purpose Field

The *Purpose* field gives a short description of the use of the instruction.

Figure 1.5 Example of Instruction Purpose

Purpose: Add Word

To add 32-bit integers. If an overflow occurs, then trap.

1.1.5 Description Field

If a one-line symbolic description of the instruction is feasible, it appears immediately to the right of the *Description* heading. The main purpose is to show how fields in the instruction are used in the arithmetic or logical operation.

Figure 1.6 Example of Instruction Description

Description: $GPR[rd] \leftarrow GPR[rs] + GPR[rt]$

The 32-bit word value in GPR *rt* is added to the 32-bit value in GPR *rs* to produce a 32-bit result.

- If the addition results in 32-bit 2's complement arithmetic overflow, the destination register is not modified and an Integer Overflow exception occurs.
- If the addition does not overflow, the 32-bit result is signed-extended and placed into GPR *rd*.

The body of the section is a description of the operation of the instruction in text, tables, and figures. This description complements the high-level language description in the *Operation* section.

This section uses acronyms for register descriptions. “GPR *rt*” is CPU general-purpose register specified by the instruction field *rt*. “FPR *fs*” is the floating point operand register specified by the instruction field *fs*. “CP1 register *fd*” is the coprocessor 1 general register specified by the instruction field *fd*. “FCSR” is the floating point *Control /Status* register.

1.1.6 Restrictions Field

The *Restrictions* field documents any possible restrictions that may affect the instruction. Most restrictions fall into one of the following six categories:

- Valid values for instruction fields (for example, see floating point [ADD.fmt](#))
- ALIGNMENT requirements for memory addresses (for example, see [LW](#))
- Valid values of operands (for example, see [DADD](#))

- Valid operand formats (for example, see floating point [ADD.fmt](#))
- Order of instructions necessary to guarantee correct execution. These ordering constraints avoid pipeline hazards for which some processors do not have hardware interlocks (for example, see [MUL](#)).
- Valid memory access types (for example, see [LL/SC](#))

Figure 1.7 Example of Instruction Restrictions**Restrictions:**

If either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits $_{63..31}$ equal), then the result of the operation is UNPREDICTABLE.

1.1.7 Operation Field

The *Operation* field describes the operation of the instruction as pseudocode in a high-level language notation resembling Pascal. This formal description complements the *Description* section; it is not complete in itself because many of the restrictions are either difficult to include in the pseudocode or are omitted for legibility.

Figure 1.8 Example of Instruction Operation**Operation:**

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UNPREDICTABLE
endif
temp ← (GPR[rs]31 || GPR[rs]31..0) + (GPR[rt]31 || GPR[rt]31..0)
if temp32 ≠ temp31 then
    SignalException(IntegerOverflow)
else
    GPR[rd] ← sign_extend(temp31..0)
endif

```

See 1.2 “[Operation Section Notation and Functions](#)” on page 22 for more information on the formal notation used here.

1.1.8 Exceptions Field

The *Exceptions* field lists the exceptions that can be caused by *Operation* of the instruction. It omits exceptions that can be caused by the instruction fetch, for instance, TLB Refill, and also omits exceptions that can be caused by asynchronous external events such as an Interrupt. Although a Bus Error exception may be caused by the operation of a load or store instruction, this section does not list Bus Error for load and store instructions because the relationship between load and store instructions and external error indications, like Bus Error, are dependent upon the implementation.

Figure 1.9 Example of Instruction Exception**Exceptions:**

Integer Overflow

An instruction may cause implementation-dependent exceptions that are not present in the *Exceptions* section.

1.1.9 Programming Notes and Implementation Notes Fields

The *Notes* sections contain material that is useful for programmers and implementors, respectively, but that is not necessary to describe the instruction and does not belong in the description sections.

Figure 1.10 Example of Instruction Programming Notes

Programming Notes:

ADDU performs the same arithmetic operation but does not trap on overflow.

1.2 Operation Section Notation and Functions

In an instruction description, the *Operation* section uses a high-level language notation to describe the operation performed by each instruction. Special symbols used in the pseudocode are described in the previous chapter. Specific pseudocode functions are described below.

This section presents information about the following topics:

- “[Instruction Execution Ordering](#)” on page 22
- “[Pseudocode Functions](#)” on page 22

1.2.1 Instruction Execution Ordering

Each of the high-level language statements in the *Operations* section are executed sequentially (except as constrained by conditional and loop constructs).

1.2.2 Pseudocode Functions

There are several functions used in the pseudocode descriptions. These are used either to make the pseudocode more readable, to abstract implementation-specific behavior, or both. These functions are defined in this section, and include the following:

- “[Coprocessor General Register Access Functions](#)” on page 22
- “[Memory Operation Functions](#)” on page 24
- “[Floating Point Functions](#)” on page 27
- “[Miscellaneous Functions](#)” on page 30

1.2.2.1 Coprocessor General Register Access Functions

Defined coprocessors, except for CP0, have instructions to exchange words and doublewords between coprocessor general registers and the rest of the system. What a coprocessor does with a word or doubleword supplied to it and how a coprocessor supplies a word or doubleword is defined by the coprocessor itself. This behavior is abstracted into the functions described in this section.

COP_LW

The COP_LW function defines the action taken by coprocessor *z* when supplied with a word from memory during a load word operation. The action is coprocessor-specific. The typical action would be to store the contents of memword in coprocessor general register *rt*.

Figure 1.11 COP_LW Pseudocode Function

```
COP_LW (z, rt, memword)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  memword: A 32-bit word value supplied to the coprocessor

  /* Coprocessor-dependent action */

endfunction COP_LW
```

COP_LD

The COP_LD function defines the action taken by coprocessor *z* when supplied with a doubleword from memory during a load doubleword operation. The action is coprocessor-specific. The typical action would be to store the contents of memdouble in coprocessor general register *rt*.

Figure 1.12 COP_LD Pseudocode Function

```
COP_LD (z, rt, memdouble)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  memdouble: 64-bit doubleword value supplied to the coprocessor.

  /* Coprocessor-dependent action */

endfunction COP_LD
```

COP_SW

The COP_SW function defines the action taken by coprocessor *z* to supply a word of data during a store word operation. The action is coprocessor-specific. The typical action would be to supply the contents of the low-order word in coprocessor general register *rt*.

Figure 1.13 COP_SW Pseudocode Function

```
dataword ← COP_SW (z, rt)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  dataword: 32-bit word value

  /* Coprocessor-dependent action */

endfunction COP_SW
```

COP_SD

The COP_SD function defines the action taken by coprocessor *z* to supply a doubleword of data during a store doubleword operation. The action is coprocessor-specific. The typical action would be to supply the contents of the low-order doubleword in coprocessor general register *rt*.

Figure 1.14 COP_SD Pseudocode Function

```

datadouble ← COP_SD (z, rt)
  z: The coprocessor unit number
  rt: Coprocessor general register specifier
  datadouble: 64-bit doubleword value

  /* Coprocessor-dependent action */

endfunction COP_SD

```

CoprocessorOperation

The CoprocessorOperation function performs the specified Coprocessor operation.

Figure 1.15 CoprocessorOperation Pseudocode Function

```

CoprocessorOperation (z, cop_fun)

  /* z:          Coprocessor unit number */
  /* cop_fun:    Coprocessor function from function field of instruction */

  /* Transmit the cop_fun value to coprocessor z */

endfunction CoprocessorOperation

```

1.2.2.2 Memory Operation Functions

Regardless of byte ordering (big- or little-endian), the address of a halfword, word, or doubleword is the smallest byte address of the bytes that form the object. For big-endian ordering this is the most-significant byte; for a little-endian ordering this is the least-significant byte.

In the *Operation* pseudocode for load and store operations, the following functions summarize the handling of virtual addresses and the access of physical memory. The size of the data item to be loaded or stored is passed in the *AccessLength* field. The valid constant names and values are shown in [Table 1.1](#). The bytes within the addressed unit of memory (word for 32-bit processors or doubleword for 64-bit processors) that are used can be determined directly from the *AccessLength* and the two or three low-order bits of the address.

AddressTranslation

The AddressTranslation function translates a virtual address to a physical address and its cacheability and coherency attribute, describing the mechanism used to resolve the memory reference.

Given the virtual address *vAddr*, and whether the reference is to Instructions or Data (*IorD*), find the corresponding physical address (*pAddr*) and the cacheability and coherency attribute (*CCA*) used to resolve the reference. If the virtual address is in one of the unmapped address spaces, the physical address and *CCA* are determined directly by the virtual address. If the virtual address is in one of the mapped address spaces then the TLB or fixed mapping MMU determines the physical address and access type; if the required translation is not present in the TLB or the desired access is not permitted, the function fails and an exception is taken.

Figure 1.16 AddressTranslation Pseudocode Function

```

(pAddr, CCA) ← AddressTranslation (vAddr, IorD, LorS)

  /* pAddr: physical address */
  /* CCA:   Cacheability&Coherency Attribute, the method used to access caches */

```

```

/*      and memory and resolve the reference */

/* vAddr: virtual address */
/* IorD: Indicates whether access is for INSTRUCTION or DATA */
/* LorS: Indicates whether access is for LOAD or STORE */

/* See the address translation description for the appropriate MMU */
/* type in Volume III of this book for the exact translation mechanism */

endfunction AddressTranslation

```

LoadMemory

The LoadMemory function loads a value from memory.

This action uses cache and main memory as specified in both the Cacheability and Coherency Attribute (*CCA*) and the access (*IorD*) to find the contents of *AccessLength* memory bytes, starting at physical location *pAddr*. The data is returned in a fixed-width naturally aligned memory element (*MemElem*). The low-order 2 (or 3) bits of the address and the *AccessLength* indicate which of the bytes within *MemElem* need to be passed to the processor. If the memory access type of the reference is *uncached*, only the referenced bytes are read from memory and marked as valid within the memory element. If the access type is *cached* but the data is not present in cache, an implementation-specific *size* and *alignment* block of memory is read and loaded into the cache to satisfy a load reference. At a minimum, this block is the entire memory element.

Figure 1.17 LoadMemory Pseudocode Function

```

MemElem ← LoadMemory (CCA, AccessLength, pAddr, vAddr, IorD)

/* MemElem: Data is returned in a fixed width with a natural alignment. The */
/*          width is the same size as the CPU general-purpose register, */
/*          32 or 64 bits, aligned on a 32- or 64-bit boundary, */
/*          respectively. */
/* CCA:     Cacheability&CoherencyAttribute=method used to access caches */
/*          and memory and resolve the reference */

/* AccessLength: Length, in bytes, of access */
/* pAddr:     physical address */
/* vAddr:     virtual address */
/* IorD:     Indicates whether access is for Instructions or Data */

endfunction LoadMemory

```

StoreMemory

The StoreMemory function stores a value to memory.

The specified data is stored into the physical location *pAddr* using the memory hierarchy (data caches and main memory) as specified by the Cacheability and Coherency Attribute (*CCA*). The *MemElem* contains the data for an aligned, fixed-width memory element (a word for 32-bit processors, a doubleword for 64-bit processors), though only the bytes that are actually stored to memory need be valid. The low-order two (or three) bits of *pAddr* and the *AccessLength* field indicate which of the bytes within the *MemElem* data should be stored; only these bytes in memory will actually be changed.

Figure 1.18 StoreMemory Pseudocode Function

```

StoreMemory (CCA, AccessLength, MemElem, pAddr, vAddr)

```

Guide to the Instruction Set

```
/* CCA:      Cacheability&Coherency Attribute, the method used to access */
/*          caches and memory and resolve the reference. */
/* AccessLength: Length, in bytes, of access */
/* MemElem:  Data in the width and alignment of a memory element. */
/*          The width is the same size as the CPU general */
/*          purpose register, either 4 or 8 bytes, */
/*          aligned on a 4- or 8-byte boundary. For a */
/*          partial-memory-element store, only the bytes that will be */
/*          stored must be valid.*/
/* pAddr:    physical address */
/* vAddr:    virtual address */

endfunction StoreMemory
```

Prefetch

The Prefetch function prefetches data from memory.

Prefetch is an advisory instruction for which an implementation-specific action is taken. The action taken may increase performance but must not change the meaning of the program or alter architecturally visible state.

Figure 1.19 Prefetch Pseudocode Function

```
Prefetch (CCA, pAddr, vAddr, DATA, hint)

/* CCA:      Cacheability&Coherency Attribute, the method used to access */
/*          caches and memory and resolve the reference. */
/* pAddr:    physical address */
/* vAddr:    virtual address */
/* DATA:    Indicates that access is for DATA */
/* hint:     hint that indicates the possible use of the data */

endfunction Prefetch
```

Table 1.1 lists the data access lengths and their labels for loads and stores.

Table 1.1 AccessLength Specifications for Loads/Stores

AccessLength Name	Value	Meaning
DOUBLEWORD	7	8 bytes (64 bits)
SEPTIBYTE	6	7 bytes (56 bits)
SEXTIBYTE	5	6 bytes (48 bits)
QUINTIBYTE	4	5 bytes (40 bits)
WORD	3	4 bytes (32 bits)
TRIPLEBYTE	2	3 bytes (24 bits)
HALFWORD	1	2 bytes (16 bits)
BYTE	0	1 byte (8 bits)

SyncOperation

The SyncOperation function orders loads and stores to synchronize shared memory.

This action makes the effects of the synchronizable loads and stores indicated by *stype* occur in the same order for all processors.

Figure 1.20 SyncOperation Pseudocode Function

```
SyncOperation(stype)

    /* stype: Type of load/store ordering to perform. */

    /* Perform implementation-dependent operation to complete the */
    /* required synchronization operation */

endfunction SyncOperation
```

1.2.2.3 Floating Point Functions

The pseudocode shown in below specifies how the unformatted contents loaded or moved to CPI registers are interpreted to form a formatted value. If an FPR contains a value in some format, rather than unformatted contents from a load (uninterpreted), it is valid to interpret the value in that format (but not to interpret it in a different format).

ValueFPR

The ValueFPR function returns a formatted value from the floating point registers.

Figure 1.21 ValueFPR Pseudocode Function

```
value ← ValueFPR(fpr, fmt)

    /* value: The formattted value from the FPR */

    /* fpr:   The FPR number */
    /* fmt:   The format of the data, one of: */
    /*        S, D, W, L, PS, */
    /*        OB, QH, */
    /*        UNINTERPRETED_WORD, */
    /*        UNINTERPRETED_DOUBLEWORD */
    /* The UNINTERPRETED values are used to indicate that the datatype */
    /* is not known as, for example, in SWC1 and SDC1 */

case fmt of
    S, W, UNINTERPRETED_WORD:
        valueFPR ← UNPREDICTABLE32 || FPR[fpr]31..0

    D, UNINTERPRETED_DOUBLEWORD:
        if (FP32RegistersMode = 0)
            if (fpr0 ≠ 0) then
                valueFPR ← UNPREDICTABLE
            else
                valueFPR ← FPR[fpr+1]31..0 || FPR[fpr]31..0
            endif
        else
            valueFPR ← FPR[fpr]
        endif

    L, PS, OB, QH:
        if (FP32RegistersMode = 0) then
            valueFPR ← UNPREDICTABLE
```

Guide to the Instruction Set

```
        else
            valueFPR ← FPR[fpr]
        endif

    DEFAULT:
        valueFPR ← UNPREDICTABLE

endcase
endfunction ValueFPR
```

The pseudocode shown below specifies the way a binary encoding representing a formatted value is stored into CP1 registers by a computational or move operation. This binary representation is visible to store or move-from instructions. Once an FPR receives a value from the StoreFPR(), it is not valid to interpret the value with ValueFPR() in a different format.

StoreFPR

Figure 1.22 StoreFPR Pseudocode Function

```
StoreFPR (fpr, fmt, value)

/* fpr:   The FPR number */
/* fmt:   The format of the data, one of: */
/*        S, D, W, L, PS, */
/*        OB, QH, */
/*        UNINTERPRETED_WORD, */
/*        UNINTERPRETED_DOUBLEWORD */
/* value: The formatted value to be stored into the FPR */

/* The UNINTERPRETED values are used to indicate that the datatype */
/* is not known as, for example, in LWC1 and LDC1 */

case fmt of
    S, W, UNINTERPRETED_WORD:
        FPR[fpr] ← UNPREDICTABLE32 || value31..0

    D, UNINTERPRETED_DOUBLEWORD:
        if (FP32RegistersMode = 0)
            if (fpr0 ≠ 0) then
                UNPREDICTABLE
            else
                FPR[fpr] ← UNPREDICTABLE32 || value31..0
                FPR[fpr+1] ← UNPREDICTABLE32 || value63..32
            endif
        else
            FPR[fpr] ← value
        endif

    L, PS, OB, QH:
        if (FP32RegistersMode = 0) then
            UNPREDICTABLE
        else
            FPR[fpr] ← value
        endif

endcase
```

```
endfunction StoreFPR
```

The pseudocode shown below checks for an enabled floating point exception and conditionally signals the exception.

CheckFPEException

Figure 1.23 CheckFPEException Pseudocode Function

```
CheckFPEException()

/* A floating point exception is signaled if the E bit of the Cause field is a 1 */
/* (Unimplemented Operations have no enable) or if any bit in the Cause field */
/* and the corresponding bit in the Enable field are both 1 */

    if ( (FCSR17 = 1) or
        ((FCSR16..12 and FCSR11..7) ≠ 0) ) then
        SignalException(FloatingPointException)
    endif

endfunction CheckFPEException
```

FPCConditionCode

The FPCConditionCode function returns the value of a specific floating point condition code.

Figure 1.24 FPCConditionCode Pseudocode Function

```
tf ← FPCConditionCode(cc)

/* tf: The value of the specified condition code */

/* cc: The Condition code number in the range 0..7 */

if cc = 0 then
    FPCConditionCode ← FCSR23
else
    FPCConditionCode ← FCSR24+cc
endif

endfunction FPCConditionCode
```

SetFPCConditionCode

The SetFPCConditionCode function writes a new value to a specific floating point condition code.

Figure 1.25 SetFPCConditionCode Pseudocode Function

```
SetFPCConditionCode(cc)
    if cc = 0 then
        FCSR ← FCSR31..24 || tf || FCSR22..0
    else
        FCSR ← FCSR31..25+cc || tf || FCSR23+cc..0
    endif

endfunction SetFPCConditionCode
```

1.2.2.4 Miscellaneous Functions

This section lists miscellaneous functions not covered in previous sections.

SignalException

The `SignalException` function signals an exception condition.

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 1.26 `SignalException` Pseudocode Function

```
SignalException(Exception, argument)

/* Exception:   The exception condition that exists. */
/* argument:   A exception-dependent argument, if any */

endfunction SignalException
```

SignalDebugBreakpointException

The `SignalDebugBreakpointException` function signals a condition that causes entry into Debug Mode from non-Debug Mode.

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 1.27 `SignalDebugBreakpointException` Pseudocode Function

```
SignalDebugBreakpointException()

endfunction SignalDebugBreakpointException
```

SignalDebugModeBreakpointException

The `SignalDebugModeBreakpointException` function signals a condition that causes entry into Debug Mode from Debug Mode (i.e., an exception generated while already running in Debug Mode).

This action results in an exception that aborts the instruction. The instruction operation pseudocode never sees a return from this function call.

Figure 1.28 `SignalDebugModeBreakpointException` Pseudocode Function

```
SignalDebugModeBreakpointException()

endfunction SignalDebugModeBreakpointException
```

NullifyCurrentInstruction

The `NullifyCurrentInstruction` function nullifies the current instruction.

The instruction is aborted, inhibiting not only the functional effect of the instruction, but also inhibiting all exceptions detected during fetch, decode, or execution of the instruction in question. For branch-likely instructions, nullification kills the instruction in the delay slot of the branch likely instruction.

Figure 1.29 NullifyCurrentInstruction PseudoCode Function

```
NullifyCurrentInstruction()

endfunction NullifyCurrentInstruction
```

JumpDelaySlot

The JumpDelaySlot function is used in the pseudocode for the PC-relative instructions in the MIPS16e ASE. The function returns TRUE if the instruction at *vAddr* is executed in a jump delay slot. A jump delay slot always immediately follows a JR, JAL, JALR, or JALX instruction.

Figure 1.30 JumpDelaySlot Pseudocode Function

```
JumpDelaySlot(vAddr)

    /* vAddr:Virtual address */

endfunction JumpDelaySlot
```

NotWordValue

The NotWordValue function returns a boolean value that determines whether the 64-bit value contains a valid word (32-bit) value. Such a value has bits 63..32 equal to bit 31.

Figure 1.31 NotWordValue Pseudocode Function

```
result ← NotWordValue(value)

    /* result:    True if the value is not a correct sign-extended word value; */
    /*           False otherwise */

    /* value:     A 64-bit register value to be checked */

    NotWordValue ← value63..32 ≠ (value31)32

endfunction NotWordValue
```

PolyMult

The PolyMult function multiplies two binary polynomial coefficients.

Figure 1.32 PolyMult Pseudocode Function

```
PolyMult(x, y)
    temp ← 0
    for i in 0 .. 31
        if xi = 1 then
            temp ← temp xor (y(31-i)..0 || 0i)
        endif
    endfor

    PolyMult ← temp

endfunction PolyMult
```

1.3 Op and Function Subfield Notation

In some instructions, the instruction subfields *op* and *function* can have constant 5- or 6-bit values. When reference is made to these instructions, uppercase mnemonics are used. For instance, in the floating point ADD instruction, *op*=COP1 and *function*=ADD. In other cases, a single field has both fixed and variable subfields, so the name contains both upper- and lowercase characters.

1.4 FPU Instructions

In the detailed description of each FPU instruction, all variable subfields in an instruction format (such as *fs*, *ft*, *immediate*, and so on) are shown in lowercase. The instruction name (such as ADD, SUB, and so on) is shown in uppercase.

For the sake of clarity, an alias is sometimes used for a variable subfield in the formats of specific instructions. For example, *rs=base* in the format for load and store instructions. Such an alias is always lowercase since it refers to a variable subfield.

Bit encodings for mnemonics are given in Volume I, in the chapters describing the CPU, FPU, MDMX, and MIPS16e instructions.

See “Op and Function Subfield Notation” on page 32 for a description of the *op* and *function* subfields.

The MIPS16e™ Application-Specific Extension to the MIPS64® Architecture

This chapter describes the purpose and key features of the MIPS16e™ Application-Specific Extension (ASE) to the MIPS64® Architecture. The MIPS16e ASE is an enhancement to the previous MIPS16™ ASE which provides additional instructions to improve the compaction of the code.

1.1 Base Architecture Requirements

The MIPS16e ASE requires the following base architecture support:

- **The MIPS32 or MIPS64 Architecture:** The MIPS16e ASE requires a compliant implementation of the MIPS32 or MIPS64 Architecture.

1.2 Software Detection of the ASE

Software may determine if the MIPS16e ASE is implemented by checking the state of the CA bit in the *Config1* CP0 register.

1.3 Compliance and Subsetting

There are no instruction subsets of the MIPS16e ASE to the MIPS64 Architecture — all MIPS16e instructions must be implemented. Specifically, this means that the original MIPS16 ASE is not an allowable subset of the MIPS16e ASE. For the MIPS16e ASE to the MIPS32 Architecture, the instructions which require a 64-bit processor are not implemented and execution of such an instruction must cause a Reserved Instruction exception.

1.4 MIPS16e Overview

The MIPS16e ASE allows embedded designs to substantially reduce system cost by reducing overall memory requirements. The MIPS16e ASE is compatible with any combination of the MIPS32 or MIPS64 Architectures, and existing MIPS binaries can be run without modification on any embedded processor implementing the MIPS16e ASE.

The MIPS16e ASE must be implemented as part of a MIPS based host processor that includes an implementation of the MIPS Privileged Resource Architecture, and the other components in a typical MIPS based system.

This volume describes only the MIPS16e ASE, and does not include information about any specific hardware implementation such as processor-specific details, because these details may vary with implementation. For this information, please refer to the specific processor's user manual.

This chapter presents specific information about the following topics:

The MIPS16e™ Application-Specific Extension to the MIPS64® Architecture

- “MIPS16e ASE Features” on page 34
- “MIPS16e Register Set” on page 34
- “MIPS16e ISA Modes” on page 36
- “JALX, JR, JR.HB, JALR and JALR.HB Operations in MIPS16e and MIPS32 Mode” on page 37
- “MIPS16e Instruction Summaries” on page 38
- “MIPS16e PC-Relative Instructions” on page 41
- “MIPS16e Extensible Instructions” on page 42
- “MIPS16e Implementation-Definable Macro Instructions” on page 43
- “MIPS16e Jump and Branch Instructions” on page 44
- “MIPS16e Instruction Formats” on page 44
- “Instruction Bit Encoding” on page 48
- “MIPS16e Instruction Stream Organization and Endianness” on page 51
- “MIPS16e Instruction Fetch Restrictions” on page 51

1.5 MIPS16e ASE Features

The MIPS16e ASE includes the following features:

- allows MIPS16e instructions to be intermixed with existing MIPS instruction binaries
- is compatible with the MIPS32 and MIPS64 instruction sets
- allows switching between MIPS16e and 32-bit MIPS Mode
- supports 8, 16, 32, and 64-bit data types (64-bit only in conjunction with MIPS64)
- defines eight general-purpose registers, as well as a number of special-purpose registers
- defines special instructions to increase code density (Extend, PC-relative instructions)

The MIPS16e ASE contains some instructions that are available on MIPS64 host processors only. These instructions must cause a Reserved Instruction exception on 32-bit processors, or on 64-bit processors on which 64-bit operations have not been enabled.

1.6 MIPS16e Register Set

The MIPS16e register set is listed in [Table 1.1](#) and [Table 1.2](#). This register set is a true subset of the register set available in 32-bit mode; the MIPS16e ASE can directly access 8 of the 32 registers available in 32-bit mode.

In addition to the eight general-purpose registers, 0-7, listed in Table 1.1, specific instructions in the MIPS16e ASE reference the stack pointer register (*sp*), the return address register (*ra*), the condition code register (*t8*), and the program counter (*PC*). Of these, Table 1.1 lists *sp*, *ra*, and *t8*, and Table 1.2 lists the MIPS16e special-purpose registers, including *PC*.

The MIPS16e ASE also contains two move instructions that provide access to all 32 general-purpose registers.

Table 1.1 MIPS16e General-Purpose Registers

MIPS16e Register Encoding ¹	32-Bit MIPS Register Encoding ²	Symbolic Name (From <i>ArchDefs.h</i>) ³	Description
0	16	s0	General-purpose register
1	17	s1	General-purpose register
2	2	v0	General-purpose register
3	3	v1	General-purpose register
4	4	a0	General-purpose register
5	5	a1	General-purpose register
6	6	a2	General-purpose register
7	7	a3	General-purpose register
N/A	24	t8	MIPS16e <i>Condition Code</i> register; implicitly referenced by the BTEQZ, BTNEZ, CMP, CMPI, SLT, SLTU, SLTI, and SLTIU instructions
N/A	29	sp	Stack pointer register
N/A	31	ra	Return address register

1. “0-7” correspond to the register’s MIPS16e binary encoding and show how that encoding relates to the MIPS registers. “0-7” never refer to the registers, except within the binary MIPS16e instructions. From the assembler, only the MIPS names (\$16, \$17, \$2, etc.) or the symbolic names (s0, s1, v0, etc.) refer to the registers. For example, to access register number 17 in the register file, the programmer references \$17 or s1, even though the MIPS16e binary encoding for this register is 001.
2. General registers not shown in the above table are not accessible through the MIPS16e instruction set, except by using the Move instructions. The MIPS16e Move instructions can access all 32 general-purpose registers.
3. The MIPS16e condition code register is referred to as T, t8, or \$24 throughout this document, depending on the context. All three names refer to the same physical register.

Table 1.2 MIPS16e Special-Purpose Registers

Symbolic Name	Purpose
PC	Program counter. The PC-relative Add and Load instructions can access this register as an operand.
HI	Contains high-order word of multiply or divide result.

Table 1.2 MIPS16e Special-Purpose Registers

Symbolic Name	Purpose
LO	Contains low-order word of multiply or divide result.

1.7 MIPS16e ISA Modes

This section describes the following:

- the ISA modes available in the architecture, [page 36](#)
- the purpose of the *ISA Mode* field, [page 36](#)
- how to switch between 32-bit MIPS and MIPS16e modes, [page 36](#)
- the role of the jump instructions when switching modes, [page 37](#)

1.7.1 Modes Available in the MIPS16e Architecture

There are two ISA modes defined in the MIPS16e Architecture, as follows:

- MIPS 32-bit mode (32-bit instructions)
- MIPS16e mode (16-bit instructions)

1.7.2 Defining the ISA Mode Field

The *ISA Mode* bit controls the type of code that is executed, as follows:

Table 1.3 ISA Mode Bit Encodings

Encoding	Mode
0b0	MIPS 32-bit mode. In this mode, the processor executes 32-bit MIPS instructions.
0b1	MIPS16e mode. In this mode, the processor executes MIPS16e instructions.

In MIPS 32-bit mode and MIPS16e mode, the JALX, JR, JALR, JALRC, and JRC instructions can change the *ISA Mode* bit, as described in [Section 1.7.4, "Using MIPS16e Jump Instructions to Switch Modes"](#).

1.7.3 Switching Between Modes When an Exception Occurs

When an exception occurs (including a Reset exception), the *ISA Mode* bit is cleared so that exceptions are handled by 32-bit code.

The ISA Mode in which the processor was running at the time that the exception occurred is visible to software as bit 0 of the Coprocessor 0 register in which the restart address is stored (*EPC*, *ErrorEPC*, or *DEPC*). See the description of these instructions in Volume III for a complete description of this process.

After the processor switches to 32-bit mode following a Reset exception, the processor starts execution at the 32-bit mode Reset exception vector.

1.7.4 Using MIPS16e Jump Instructions to Switch Modes

The MIPS16e application-specific extension supports procedure calls and returns from both MIPS16e and 32-bit MIPS code to both MIPS16e and 32-bit MIPS code. The following instructions are used:

- The JAL instruction supports calls to the same ISA.
- The JALX instruction supports calls that change the ISA.
- The JALR, JALR.HB and JALRC instructions support calls to either ISA.
- The JR, JR.HB and JRC instructions support returns to either ISA.

The JAL, JALR, JALR.HB, JALRC, and JALX instructions save the *ISA Mode* bit in bit 0 of the general register containing the return address. The contents of this general register may be used by a future JR, JR.HB, JRC, JALR, or JALRC instruction to return and restore the *ISA Mode*.

The JALX instruction in both modes switches to the other ISA (it changes 0b0 → 0b1 and 0b1 → 0b0).

The JR, JR.HB, JALR and JALR.HB instructions in both modes load the *ISA Mode* bit from bit 0 of the general register holding the target address. Bit 0 of the general register is not part of the target address; bit 0 of PC is loaded with a 0 so that no address exceptions can occur.

The JRC and JALRC instructions in MIPS16e mode load the *ISA Mode* bit from bit 0 of the general register holding the target address. Bit 0 of the general register is not part of the target address; bit 0 of PC is loaded with a 0 so that no address exceptions can occur.

1.8 JALX, JR, JR.HB, JALR and JALR.HB Operations in MIPS16e and MIPS32 Mode

The behavior of five of the 32-bit MIPS instructions—JALX, JR, JR.HB, JALR, JALR.HB—differs between those processors that implement MIPS16e and those processors that do not.

In processors that implement the MIPS16e ASE, the five instructions behave as follows:

- The JALX instruction executes a JAL and switches to the other mode.
- JR, JR.HB, JALR and JALR.HB instructions load the *ISA Mode* bit from bit 0 of the source register. Bit 0 of PC is loaded with a 0, and no Address exception can occur when bit 0 of the source register is a 1 (MIPS16e mode).

In CPUs that do not implement the MIPS16e ASE, the five instructions behave as follows:

- JALX instructions cause a Reserved Instruction exception.
- JR, JR.HB, JALR and JALR.HB instructions cause an Address exception on the target instruction fetch when bit 0 of the source register is a 1.

1.9 MIPS16e Instruction Summaries

This section describes the various instruction categories and then summarizes the MIPS16e instructions included in each category. Extensible instructions are also identified.

There are six instruction categories:

- **Loads and Stores**—These instructions move data between memory and the GPRs.
- **Save and Restore**—These instructions create and tear down stack frames.
- **Computational**—These instructions perform arithmetic, logical, and shift operations on values in registers.
- **Jump and Branch**—These instructions change the control flow of a program.
- **Special**—This category includes the Break and Extend instructions. Break transfers control to an exception handler, and Extend enlarges the *immediate* field of the next instruction.
- **Implementation-Definable Macro Instructions**—This category includes the capability of defining macros that are replaced at execution time by a set of 32-bit MIPS instructions, with appropriate parameter substitution.

Tables 1.4 through 1.12 list the MIPS16e instruction set.

Table 1.4 MIPS16e Load and Store Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
LB	Load Byte	Yes	No
LBU	Load Byte Unsigned	Yes	No
LD	Load Doubleword	Yes	Yes
LH	Load Halfword	Yes	No
LHU	Load Halfword Unsigned	Yes	No
LW	Load Word	Yes	No
LWU	Load Word Unsigned	Yes	Yes
SB	Store Byte	Yes	No
SD	Store Doubleword	Yes	Yes
SH	Store Halfword	Yes	No
SW	Store Word	Yes	No

Table 1.5 MIPS16e Save and Restore Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
RESTORE	Restore Registers and Deallocate Stack Frame	Yes	No

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
SAVE	Save Registers and SetUp Stack Frame	Yes	No

Table 1.6 MIPS16e ALU Immediate Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
ADDIU	Add Immediate Unsigned	Yes	No
CMPI	Compare Immediate	Yes	No
DADDIU	Doubleword Add Immediate Unsigned	Yes	Yes
LI	Load Immediate	Yes	No
SLTI	Set on Less Than Immediate	Yes	No
SLTIU	Set on Less Than Immediate Unsigned	Yes	No

Table 1.7 MIPS16e Arithmetic One, Two or Three Operand Register Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
ADD	Add Unsigned	No	No
AND	AND	No	No
CMP	Compare	No	No
DADDU	Doubleword Add Unsigned	No	Yes
DSUBU	Doubleword Subtract Unsigned	No	Yes
MOVE	Move	No	No
NEG	Negate	No	No
NOT	Not	No	No
OR	OR	No	No
SEB	Sign-Extend Byte	No	No
SEH	Sign-Extend Halfword	No	No
SEW	Sign-Extend Word	No	Yes
SLT	Set on Less Than	No	No
SLTU	Set on Less Than Unsigned	No	No
SUBU	Subtract Unsigned	No	No
XOR	Exclusive OR	No	No
ZEB	Zero-extend Byte	No	No
ZEH	Zero-Extend Halfword	No	No
ZEW	Zero-Extend Word	No	Yes

Table 1.8 MIPS16e Special Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
BREAK	Breakpoint	No	No
EXTEND	Extend	No	No

Table 1.9 MIPS16e Multiply and Divide Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
DDIV	Doubleword Divide	No	Yes
DDIVU	Doubleword Divide Unsigned	No	Yes
DIV	Divide	No	No
DIVU	Divide Unsigned	No	No
DMULT	Doubleword Multiply	No	Yes
DMULTU	Doubleword Multiply Unsigned	No	Yes
MFHI	Move From HI	No	No
MFLO	Move From LO	No	No
MULT	Multiply	No	No
MULTU	Multiply Unsigned	No	No

Table 1.10 MIPS16e Jump and Branch Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
B	Branch Unconditional	Yes	No
BEQZ	Branch on Equal to Zero	Yes	No
BNEZ	Branch on Not Equal to Zero	Yes	No
BTEQZ	Branch on T Equal to Zero	Yes	No
BTNEZ	Branch on T Not Equal to Zero	Yes	No
JAL ¹	Jump and Link	No	No
JALR	Jump and Link Register	No	No
JALRC	Jump and Link Register Compact	No	No
JALX1	Jump and Link Exchange	No	No
JR	Jump Register	No	No
JRC	Jump Register Compact	No	No

1. The JAL and JALX instructions are not extensible because they are inherently 32-bit instructions.

Table 1.11 MIPS16e Shift Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
DSLL	Doubleword Shift Left Logical	Yes	Yes
DSLLV	Doubleword Shift Left Logical Variable	No	Yes
DSRA	Doubleword Shift Right Arithmetic	Yes	Yes
DSRAV	Doubleword Shift Right Arithmetic Variable	No	Yes
DSRL	Doubleword Shift Right Logical	Yes	Yes
DSRLV	Doubleword Shift Right Logical Variable	No	Yes
SRA	Shift Right Arithmetic	Yes	No
SRAV	Shift Right Arithmetic Variable	No	No
SLL	Shift Left Logical	Yes	No

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
SLLV	Shift Left Logical Variable	No	No
SRL	Shift Right Logical	Yes	No
SRLV	Shift Right Logical Variable	No	No

Table 1.12 Implementation-Definable Macro Instructions

Mnemonic	Instruction	Extensible Instruction?	Implemented Only on MIPS64 Processors?
ASMACRO	Implementation-Definable Macro Instructions	Yes ¹	No

1. The Implementation-Definable Macro Instructions are always extended instructions. There are no 16-bit macro instruction

1.10 MIPS16e PC-Relative Instructions

The MIPS16e ASE provides PC-relative addressing for four instructions, in both extended and non-extended versions. The four instructions are listed in [Table 1.13](#).

Table 1.13 PC-Relative MIPS16e Instructions

Instruction	Use
Load Word	LW rx, offset(pc)
Load Doubleword	LD ry, offset(pc)
Add Immediate Unsigned	ADDIU rx, pc, immediate
Doubleword Add Immediate Unsigned	DADDIU ry, pc, immediate

These instructions use the PC value of either the PC-relative instruction itself or the PC value for the preceding instruction as the base for address calculation.

[Table 1.14](#) summarizes the address calculation base used for the various instruction combinations.

Table 1.14 PC-Relative Base Used for Address Calculation

Instruction	BasePC Value
Non-extended PC-relative instruction not in Jump Delay Slot	Address of instruction
Extended PC-relative instruction	Address of Extend instruction
Non-extended PC-relative instruction in JR or JALR jump delay slot	Address of JR or JALR instruction
Non-extended PC-relative instruction in JAL or JALX jump delay slot	Address of first JAL or JALX half-word

The JRC and JALRC instructions do not have delay slots and do not affect the PC-relative base address calculated for an instruction immediately following the JRC or JALRC.

In the descriptive summaries of PC-relative instructions, located in [Tables 1.13](#) and [1.14](#), the PC value used as the basis for calculating the address is referred to as the BasePC value. The BasePC equals the *Exception Program Counter (EPC)* value associated with the PC-relative instruction.

1.11 MIPS16e Extensible Instructions

This section explains the purpose of an *Extend* instruction, how to use it, and which MIPS16e instructions are extensible.

The Extend instruction allows you to enlarge the *immediate* field of any MIPS16e instruction whose *immediate* field is smaller than the *immediate* field in the equivalent 32-bit MIPS instruction. The Extend instruction is a prefix which modifies the behavior of the instruction which follows it, and must always immediately precede the instruction whose *immediate* field you want to extend. Every extended instruction uses 4 bytes in program memory instead of 2 bytes (2 bytes for Extend and 2 bytes for the instruction being extended), and it can cross a word boundary. The PC value of an extended instruction is the address of the halfword containing the Extend.

For example, the following MIPS16e instruction contains a five-bit *immediate*.

```
LW ry, offset(rx)
```

The *immediate* expands to 16 bits (0b000000000 || offset || 0b00) before execution in the pipeline. This allows 32 different offset values of 0, 4, 8, and up through 124, in increments of 4. Once extended, this instruction can hold any of the 65,536 values in the range -32768 through 32767 that are also available with the 32-bit MIPS version of the LW instruction.

Shift instructions are extended to unsigned *immediates* of 5 bits. All other immediate instructions expand to either signed or unsigned 16-bit immediates. There are only two exceptions which can be extended to a 15-bit signed *immediate*:

```
ADDIU ry, rx, immediate
DADDIU ry, rx, immediate
```

Unlike most other extended instructions, an extended RESTORE or SAVE instruction provides both a larger frame size adjustment, and the ability to save and restore more registers than the non-extended version.

Once both halves of an extended instruction have been fetched and the instruction starts flowing down the pipeline, the instruction is treated as a single entity, not as independent instructions. This implies that an exception or interrupt never reports an EPC value between the EXTEND and the instruction being extended, and that EJTAG single step treats an instruction step as the execution of the entire extended instruction, not the components.

There is only one restriction on the location of extensible instructions: They may not be placed in jump delay slots. Doing so causes **UNPREDICTABLE** results.

Table 1.15 lists the MIPS16e extensible instructions, the size of their *immediate*, and how much each *immediate* can be extended when preceded with an Extend instruction. Executing an instruction which is not extensible (those which are marked No in the “Extensible Instruction?” column of Table 1.4 through Table 1.12, including the EXTEND instruction itself) must cause a Reserved Instruction Exception.

Table 1.15 MIPS16e Extensible Instructions

Mnemonic	MIPS16e Instruction	MIPS16e Immediate	Extended Immediate
ADDIU	Add Immediate Unsigned	4 (ADDIU ry, rx, imm) 8	15 (ADDIU ry, rx, imm) 16
B	Branch Unconditional	11	16
BEQZ	Branch on Equal to Zero	8	16
BNEZ	Branch on Not Equal to Zero	8	16

Mnemonic	MIPS16e Instruction	MIPS16e Immediate	Extended Immediate
BTEQZ	Branch on T Equal to Zero	8	16
BTNEZ	Branch on T Not Equal to Zero	8	16
CMPI	Compare Immediate	8	16
DADDIU	Doubleword Add Immediate Unsigned	4 (DADDIU ry, rx, imm) 5 (or 8)	15 (DADDIU ry, rx, imm) 16
DSLL	Doubleword Shift Left Logical	3	6
DSRA	Doubleword Shift Right Arithmetic	3	6
DSRL	Doubleword Shift Right Logical	3	6
LB	Load Byte	5	16
LBU	Load Byte Unsigned	5	16
LD	Load Doubleword	5	16
LH	Load Halfword	5	16
LHU	Load Halfword Unsigned	5	16
LI	Load Immediate	8	16
LW	Load Word	5 (or 8)	16
LWU	Load Word Unsigned	5	16
RESTORE	Restore Registers and Deallocate Stack Frame	4	8
SAVE	Save Registers and Set Up Stack Frame	4	8
SB	Store Byte	5	16
SD	Store Doubleword	5 (or 8)	16
SH	Store Halfword	5	16
SLL	Shift Left Logical	3	5
SLTI	Set on Less Than Immediate	8	16
SLTIU	Set on Less Than Immediate Unsigned	8	16
SRA	Shift Right Arithmetic	3	5
SRL	Shift Right Logical	3	5
SW	Store Word	5 (or 8)	16

1.12 MIPS16e Implementation-Definable Macro Instructions

Previous revisions of the MIPS16e ASE assumed that most MIPS16e instructions mapped to a single 32-bit MIPS instruction. However, there are several MIPS16e instructions for which there is no corresponding 32-bit MIPS instruction equivalent. The addition of the SAVE and RESTORE instructions introduced the possibility that a single MIPS16e instruction expand to a fixed sequence of multiple 32-bit instructions. The obvious extension to this capability is the ability to define a *Macro* capability in which a single extended MIPS16e instruction can be expanded into a sequence of 32-bit MIPS instructions, with parameter substitution done between fields of the macro instruction and fields of the expanded instructions. This is the concept behind the addition of Implementation-Definable Macro Instructions to the MIPS16e ASE.

The term “Implementation-Definable” refers to the fact that the macro definitions are created when the processor is implemented, rather than via a programmable mechanism that is available to the user of the processor. The macro definitions, expansions, and parameter substitutions are defined when the processor is implemented, and is therefore

implementation-dependent. The programmer visible representation of this macro capability is provided by the ASMACRO (for Application Specific Macro) instruction, as defined in the next chapter.

1.13 MIPS16e Jump and Branch Instructions

Jump and Branch instructions change the control flow of a program.

The JAL, JALR, JALX, and JR instructions occur with a one-instruction delay. That is, the instruction immediately following the jump is always executed, whether or not the jump is taken.

Branch instructions and the JALRC and JRC jump instructions do not have a delay slot. If a branch or jump is taken, the instruction immediately following the branch or jump is never executed. If the branch or jump is not taken, the instruction following the branch or jump is always executed.

Branch, jump and extended instructions may not be placed in jump delay slots. Doing so causes **UNPREDICTABLE** results.

1.14 MIPS16e Instruction Formats

This section defines the format¹ for each MIPS16e instruction type and includes formats for both normal and extended instructions.

Every MIPS16e instruction consists of 16 bits aligned on a halfword boundary. All variable subfields in an instruction format (such as *rx*, *ry*, *rz*, and *immediate*) are shown in lowercase letters.




The two instruction subfields *op* and *funct* have constant values for specific instructions. These values are given in their uppercase mnemonic names. For example, *op* is LB in the Load Byte instruction; *op* is RRR and *function* is ADDU in the Add Unsigned instruction.

Definitions for the fields that appear in the instruction formats are summarized in [Table 1.16](#).





Table 1.16 MIPS16e Instruction Fields

Field	Definition
<i>funct</i> or <i>f</i>	Function field
<i>immediate</i> or <i>imm</i>	4-, 5-, 8-, or 11-bit immediate, branch displacement, or address displacement
<i>op</i>	5-bit major operation code
<i>rx</i>	3-bit source or destination register specifier
<i>ry</i>	3-bit source or destination register specifier
<i>rz</i>	3-bit source or destination register specifier
<i>sa</i>	3- or 5-bit shift amount


1. As used here, the term *format* means the layout of the MIPS16e instruction word.

1.14.1 I-type instruction format**1.14.2 RI-type instruction format****1.14.3 RR-type instruction format**


1. When the funct field is either *CNVT* or *J(AL)R(C)*, the *ry* field encodes a sub-function to be performed rather than a register number

1.14.4 RRI-type instruction format**1.14.5 RRR-type instruction format****1.14.6 RRI-A type instruction format****1.14.7 Shift instruction format**


1. The three-bit *sa* field can encode a shift amount of 0 through 7. 0 bit shifts (NOPs) are not possible; a 0 value translates to a shift amount of 8.

1.14.8 I8-type instruction format

1.14.9 I8_MOVR32 instruction format (used only by the MOVR32 instruction)




1.14.10 I8_MOV32R instruction format (used only by MOV32R instruction)




1. The *r32* field uses special bit encoding. For example, the encoding for \$7 (00111) is 11100 in the *r32* field.


1.14.11 I8_SVRS instruction format (used only by the SAVE and RESTORE instructions)




1.14.12 I64-type instruction format



1.14.13 RI64-type instruction format




1.14.14 JAL and JALX instruction format




1. If *x*=0, instruction is JAL. If *x*=1, instruction is JALX.

1.14.15 EXT-I instruction format



1.14.16 ASMACRO instruction format



1.14.17 EXT-RI instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:5					immediate 15:11					op		rx	0	0	0	immediate 4:0											

1.14.18 EXT-RRI instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:5					immediate 15:11					op		rx	ry		immediate 4:0												

1.14.19 EXT-RRI-A instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:4					imm 14:11					RRI-A		rx	ry		f	imm 3:0											

1.14.20 EXT-SHIFT instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				sa 4:0			s5 ¹	0	0	0	0	0	SHIFT					rx	ry		0	0	0	f							

1. s5 is equivalent to sa5, the most significant bit of the 6-bit shift amount (*sa*) field. For extended DSLL shifts, this bit may be either 0 or 1. For all 32-bit extended shifts, s5 must be 0. None of the extended shift instructions perform the 0-to-8 mapping, so 0 bit shifts are possible using the extended format.

1.14.21 EXT-I8 instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:5					immediate 15:11					I8		funct		0	0	0	immediate 4:0										

1.14.22 EXT-I8_SVRS instruction format (used only by the SAVE and RESTORE

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				xsregs		framesize 7:4			0	aregs			I8		SVRS		s	ra	s0	s1	framesize 3:0										

instructions)

1.14.23 EXT-I64 instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:5					immediate 15:11					I64		funct		0	0	0	immediate 4:0										

1.14.24 EXT-RI64 instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				immediate 10:5					immediate 15:11					I64		funct		ry		immediate 4:0											

1.14.25 EXT-SHIFT64 instruction format

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTEND				sa 4:0				s5 ¹	0	0	0	0	0	RR				0	0	0	ry			function							

1. s5 is equivalent to sa5, the most-significant bit of the 6-bit shift amount (*sa*) field. None of the extended shift instructions perform the 0-to-8 mapping, so 0 bit shifts are possible using the extended format.

1.15 Instruction Bit Encoding

Table 1.18 through Table 1.26 describe the encoding used for the MIPS16e ASE. Table 1.17 describes the meaning of the symbols used in the tables.

Table 1.17 Symbols Used in the Instruction Encoding Tables

Symbol	Meaning
*	Operation or field codes marked with this symbol are reserved for future use. Executing such an instruction must cause a Reserved Instruction Exception.
δ	(Also <i>italic</i> field name.) Operation or field codes marked with this symbol denotes a field class. The instruction word must be further decoded by examining additional tables that show values for another instruction field.
β	Operation or field codes marked with this symbol represent a valid encoding for a higher-order MIPS ISA level. Executing such an instruction must cause a Reserved Instruction Exception.
\perp	Operation or field codes marked with this symbol represent instructions which are not legal if the processor is configured to be backward compatible with MIPS32 processors. If the processor is executing in Kernel Mode, Debug Mode, or 64-bit instructions are enabled, execution proceeds normally. In other cases, executing such an instruction must cause a Reserved Instruction Exception (non-coprocessor encodings or coprocessor instruction encodings for a coprocessor to which access is allowed) or a Coprocessor Unusable Exception (coprocessor instruction encodings for a coprocessor to which access is not allowed).
θ	Operation or field codes marked with this symbol are available to licensed MIPS partners. To avoid multiple conflicting instruction definitions, MIPS Technologies will assist the partner in selecting appropriate encodings if requested by the partner. The partner is not required to consult with MIPS Technologies when one of these encodings is used. If no instruction is encoded with this value, executing such an instruction must cause a Reserved Instruction Exception (<i>SPECIAL2</i> encodings or coprocessor instruction encodings for a coprocessor to which access is allowed) or a Coprocessor Unusable Exception (coprocessor instruction encodings for a coprocessor to which access is not allowed).
σ	Field codes marked with this symbol represent an EJTAG support instruction and implementation of this encoding is optional for each implementation. If the encoding is not implemented, executing such an instruction must cause a Reserved Instruction Exception. If the encoding is implemented, it must match the instruction encoding as shown in the table.
ϵ	Operation or field codes marked with this symbol are reserved for MIPS Application Specific Extensions. If the ASE is not implemented, executing such an instruction must cause a Reserved Instruction Exception.
ϕ	Operation or field codes marked with this symbol are obsolete and will be removed from a future revision of the MIPS64 ISA. Software should avoid using these operation or field codes.

Table 1.17 Symbols Used in the Instruction Encoding Tables

Symbol	Meaning
œ	Operation or field codes marked with this symbol are not extensible (see Section 1.11, "MIPS16e Extensible Instructions" on page 42). Executing such an instruction with an EXTEND prefix must cause a Reserved Instruction Exception.

Table 1.18 MIPS16e Encoding of the Opcode Field

opcode		bits 13..11							
		0	1	2	3	4	5	6	7
bits 15..14		000	001	010	011	100	101	110	111
0	00	ADDIUSP ¹	ADDIUPC ²	B	JAL(X) δ	BEQZ	BNEZ	SHIFT δ	LD ⊥
1	01	RRI-A δ	ADDIU ⁸ ³	SLTI	SLTIU	I8 δ	LI	CMPI	SD ⊥
2	10	LB	LH	LWSP ⁴	LW	LBU	LHU	LWPC ⁵	LWU ⊥
3	11	SB	SH	SWSP ⁶	SW	RRR δ	RR δ	EXTEND δœ	I64 δ⊥

1. The ADDIUSP opcode is used by the ADDIU rx, sp, immediate instruction
2. The ADDIUPC opcode is used by the ADDIU rx, pc, immediate instruction
3. The ADDIU⁸ opcode is used by the ADDIU rx, immediate instruction
4. The LWSP opcode is used by the LW rx, offset(sp) instruction
5. The LWPC opcode is used by the LW rx, offset(pc) instruction
6. The SWSP opcode is used by the SW rx, offset(sp) instruction

Table 1.19 MIPS16e JAL(X) Encoding of the x Field

x	bit 26	
	0	1
	JAL œ	JALX œ

Table 1.20 MIPS16e SHIFT Encoding of the f Field

f	bits 1..0			
	0	1	2	3
	00	01	10	11
	SLL	DSLL ⊥	SRL	SRA

Table 1.21 MIPS16e RRI-A Encoding of the f Field

f	bit 4	
	0	1
	ADDIU ¹	DADDIU ² ⊥

1. The ADDIU function is used by the ADDIU ry, rx, immediate instruction

- The DADDIU function is used by the DADDIU ry, rx, immediate instruction

Table 1.22 MIPS16e I8 Encoding of the funct Field

funct	bits 10..8							
	0	1	2	3	4	5	6	7
	000	001	010	011	100	101	110	111
	BTEQZ	BTNEZ	SWRASP ¹	ADJSP ²	SVRS δ	MOV32R ³ \notin	*	MOVR32 ⁴ \notin

- The SWRASP function is used by the SW ra, offset(sp) instruction
- The ADJSP function is used by the ADDIU sp, immediate instruction
- The MOV32R function is used by the MOVE r32, rz instruction
- The MOVR32 function is used by the MOVE ry, r32 instruction

Table 1.23 MIPS16e RRR Encoding of the f Field

f	bits 1..0			
	0	1	2	3
	00	01	10	11
	DADDU $\perp \notin$	ADDU \notin	DSUBU $\perp \notin$	SUBU \notin

Table 1.24 MIPS16e RR Encoding of the Funct Field

funct		bits 2..0							
		0	1	2	3	4	5	6	7
bits 4..3		000	001	010	011	100	101	110	111
0	00	<i>J(AL)R(C)</i> δ	SDBBP \notin	SLT \notin	SLTU \notin	SLLV \notin	BREAK \notin	SRLV \notin	SRAV \notin
1	01	DSRL \perp	*	CMP \notin	NEG \notin	AND \notin	OR \notin	XOR \notin	NOT \notin
2	10	MFHI \notin	CNVT δ	MFLO \notin	DSRA \perp	DSLIV $\perp \notin$	*	DSRLV $\perp \notin$	DSRAV $\perp \notin$
3	11	MULT \notin	MULTU \notin	DIV \notin	DIVU \notin	DMULT $\perp \notin$	DMULTU $\perp \notin$	DDIV $\perp \notin$	DDIVU $\perp \notin$

Table 1.25 MIPS16e I64 Encoding of the funct Field

funct	bits 10..8							
	0	1	2	3	4	5	6	7
	000	001	010	011	100	101	110	111
	LDSP ¹ \perp	SDSP ² \perp	SDRASP ³ \perp	DADJSP ⁴ \perp	LDPC ⁵ \perp	DADDIU ⁶ \perp	DADDIUPC ⁷ \perp	DADDIUSP ⁸ \perp

- The LDSP function is used by the LD ry, offset(sp) instruction
- The SDSP function is used by the SD ry, offset(sp) instruction
- The SDRASP function is used by the SD ra, offset(sp) instruction
- The DADJSP function is used by the DADDIU sp, immediate instruction
- The LDPC function is used by the LD ry, offset(pc) instruction
- The DADDIU5 function is used by the DADDIU ry, immediate instruction
- The DADDIUPC function is used by the DADDIU ry, pc, immediate instruction
- The DADDIUSP function is used by the DADDIU ry, sp, immediate instruction

Table 1.26 MIPS16e I8 Encoding of the s Field when funct=SVRS

s	bit 7	
	0	1
	RESTORE	SAVE

Table 1.27 MIPS16e RR Encoding of the ry Field when funct=J(AL)R(C)

ry	bits 7..5							
	0	1	2	3	4	5	6	7
	000	001	010	011	100	101	110	111
	JR rx \neq	JR ra \neq	JALR \neq		JRC rx \neq	JRC ra \neq	JALRC \neq	

Table 1.28 MIPS16e RR Encoding of the ry Field when funct=CNVT

ry	bits 7..5							
	0	1	2	3	4	5	6	7
	000	001	010	011	100	101	110	111
	ZEB \neq	ZEH \neq	ZEW $\perp \neq$	*	SEB \neq	SEH \neq	SEW $\perp \neq$	*

1.16 MIPS16e Instruction Stream Organization and Endianness

The instruction halfword is placed within the 32-bit (or 64-bit) memory element according to system endianness.

- On a 32-bit processor in big-endian mode, the first instruction is read from bits 31..16 and the second instruction is read from bits 15..0
- On a 32-bit processor in little-endian mode, the first instruction is read from bits 15..0 and the second instruction is read from bits 31..16

The above rule also applies to all extended instructions, since they consist of two 16-bit halfwords. Similarly, JAL and JALX instructions should be viewed as consisting of two 16-bit halfwords, which means this rule also applies to them.

For a 16-bit-instruction sequence, instructions are placed in memory so that an LH instruction with the PC as an argument fetches the instruction independent of system endianness.

1.17 MIPS16e Instruction Fetch Restrictions

When the processor is running in MIPS16e mode and fetch address is in uncacheable memory, certain restrictions apply to the width of each instruction fetch. Under these circumstances, the processor never fetches more than an aligned word during each instruction fetch. It is UNPREDICTABLE whether the processor fetches a single aligned word, or two aligned halfwords during each instruction fetch.

The MIPS16e™ ASE Instruction Set

1.1 MIPS16e™ Instruction Descriptions

This chapter provides an alphabetical listing of the instructions listed in [Table 1.4](#) through [Table 1.12](#).

1.1.1 Pseudocode Functions Specific to MIPS16e™

This section defines the pseudocode functions that are specific to the MIPS16e ASE. These functions are used in the Operation section of each MIPS16e instruction description.

1.1.1.1 Xlat

The Xlat function translates the MIPS16e register field index to the correct 32-bit MIPS physical register index. It is used to assure that a value of 0b000 in a MIPS16e register field maps to GPR 16, and a value of 0b001 maps to GPR 17. All other values (0b010 through 0b111) map directly.


Figure 1-1 Xlat Pseudocode Function

```
PhyReg ← Xlat(i)

/* PhyReg:   Physical register index, in the range 0..7 */
/* i:       Opcode register field index */

if (i < 2) then
    Xlat ← i + 16
else
    Xlat ← i
endif

endfunction Xlat
```

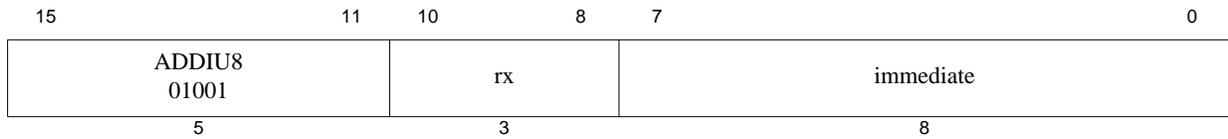

Format: ADDIU *rx*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (2-Operand)

To add a constant to a 32-bit integer.

Description: $GPR[rx] \leftarrow GPR[rx] + \text{immediate}$

The 8-bit *immediate* is sign-extended and then added to the contents of GPR *rx* to form a 32-bit result. The result is sign-extended and placed in GPR *rx*.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR *rx* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)])) then
  UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] + sign_extend(immediate)
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

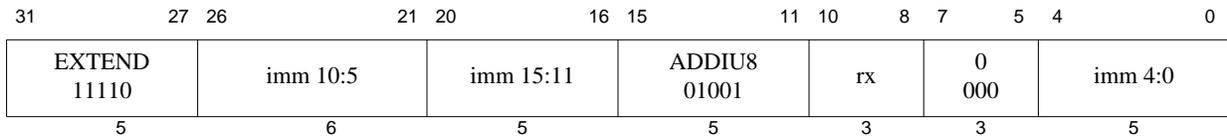

Format: ADDIU *rx*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (2-Operand, Extended)

To add a constant to a 32-bit integer.

Description: $GPR[rx] \leftarrow GPR[rx] + \text{immediate}$

The 16-bit *immediate* is sign-extended and then added to the contents of GPR *rx* to form a 32-bit result. The result is sign-extended and placed in GPR *rx*.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR *rx* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)])) then
  UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] + sign_extend(immediate)
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

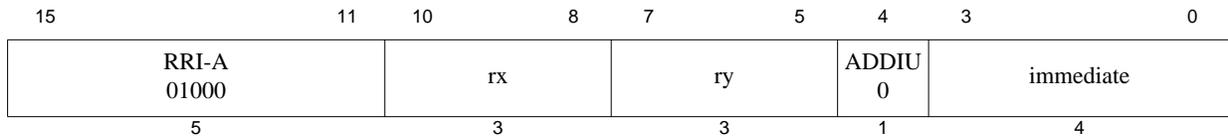

Format: ADDIU *ry*, *rx*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (3-Operand)

To add a constant to a 32-bit integer.

Description: $GPR[ry] \leftarrow GPR[rx] + \text{immediate}$

The 4-bit *immediate* is sign-extended and then added to the contents of GPR *rx* to form a 32-bit result. The result is sign-extended and placed into GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR *rx* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)])) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] + sign_extend(immediate)
GPR[Xlat(ry)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

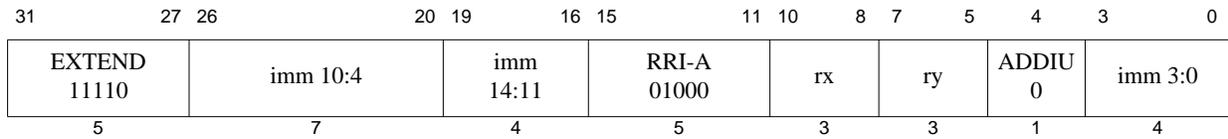

Format: ADDIU *ry*, *rx*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (3-Operand, Extended)

To add a constant to a 32-bit integer.

Description: $GPR[ry] \leftarrow GPR[rx] + \text{immediate}$

The 15-bit *immediate* is sign-extended and then added to the contents of GPR *rx* to form a 32-bit result. The result is sign-extended and placed into GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR *rx* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)])) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] + sign_extend(immediate)
GPR[Xlat(ry)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

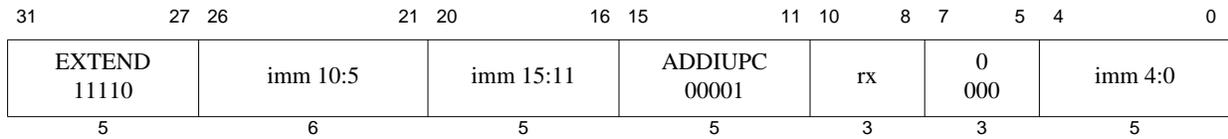

Format: ADDIU *rx*, *pc*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (3-Operand, PC-Relative, Extended)

To add a constant to the program counter.

Description: $GPR[rx] \leftarrow PC + immediate$

The 16-bit *immediate* is sign-extended and added to the address of the ADDIU instruction. Before the addition, the two lower bits of the instruction address are cleared.

The result of the addition is sign-extended and placed in GPR *rx*.

No integer overflow exception occurs under any circumstances.

Restrictions:

A PC-relative, extended ADDIU may not be placed in the delay slot of a jump instruction.

If the PC is outside the 32-bit Compatibility Address Space (i.e., bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(PC) then
    UNPREDICTABLE
endif
temp ← (PCGPRLEN-1..2 || 02) + sign_extend(immediate)
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:


None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

The use of the ADDIUPC instruction on a MIPS64 processor in which the PC is outside the 32-bit Compatibility Address Space will not produce the expected result. This is because the final PC value is required to be sign-extended from the least-significant 32 bits, and such a value will not generate the correct address if PC is not also a sign-extended value. In such cases, DADDIUPC should be used instead.

The assembler LA (Load Address) pseudo-instruction is implemented as a PC-relative add (using ADDIUPC for MIPS32 or DADDIUPC for MIPS64 code).

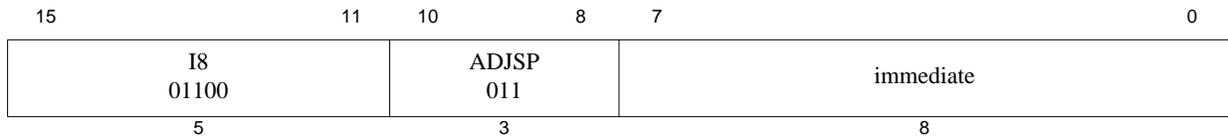

Format: ADDIU *sp*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (2-Operand, SP-Relative)

To add a constant to the stack pointer.

Description: $GPR[sp] \leftarrow GPR[sp] + \text{immediate}$

The 8-bit *immediate* is shifted left three bits, sign-extended, and then added to the contents of GPR 29 to form a 32-bit result. The result is sign-extended and placed in GPR 29.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR 29 does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[29])) then
    UNPREDICTABLE
endif
temp ← GPR[29] + sign_extend(immediate || 03)
GPR[29] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

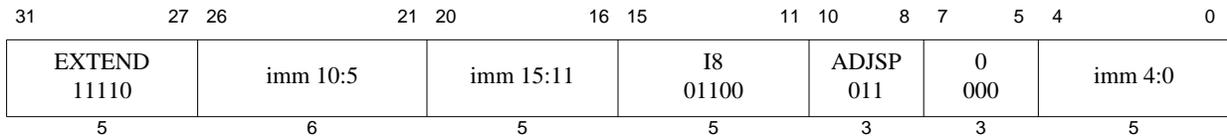

Format: ADDIU *sp*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (2-Operand, SP-Relative, Extended)

To add a constant to the stack pointer.

Description: $GPR[sp] \leftarrow GPR[sp] + \text{immediate}$

The 16-bit *immediate* is sign-extended, and then added to the contents of GPR 29 to form a 32-bit result. The result is sign-extended and placed in GPR 29.

No integer overflow exception occurs under any circumstances.

Restrictions:

If GPR 29 does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[29])) then
    UNPREDICTABLE
endif
temp ← GPR[29] + sign_extend(immediate)
GPR[29] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

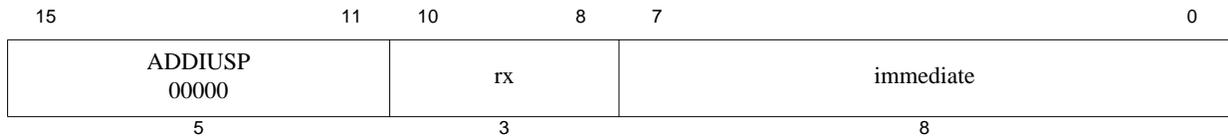

Format: ADDIU *rx*, *sp*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (3-Operand, SP-Relative)

To add a constant to the stack pointer.

Description: $GPR[rx] \leftarrow GPR[sp] + \text{immediate}$

The 8-bit *immediate* is shifted left two bits, zero-extended, and then added to the contents of GPR 29 to form a 32-bit result. The result is sign-extended and placed in GPR *rx*.

No integer overflow exception occurs under any circumstances.

Restrictions:

None

Operation:

```

if (NotWordValue(GPR[29])) then
    UNPREDICTABLE
endif
temp ← GPR[29] + zero_extend(immediate || 02)
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

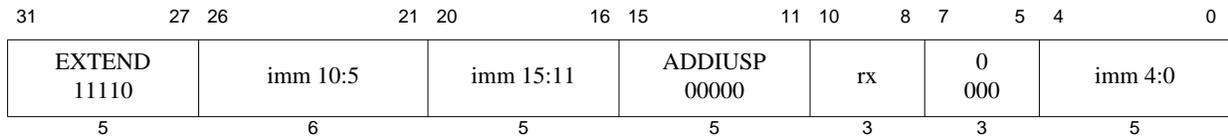

Format: ADDIU *rx*, *sp*, *immediate*

MIPS16e

Purpose: Add Immediate Unsigned Word (3-Operand, SP-Relative, Extended)

To add a constant to the stack pointer.

Description: $GPR[rx] \leftarrow GPR[sp] + immediate$

The 16-bit *immediate* is sign-extended and then added to the contents of GPR 29 to form a 32-bit result. The result is sign-extended and placed in GPR *rx*.

No integer overflow exception occurs under any circumstances.

Restrictions:

None

Operation:

```

if (NotWordValue(GPR[29])) then
    UNPREDICTABLE
endif
temp ← GPR[29] + sign_extend(immediate)
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

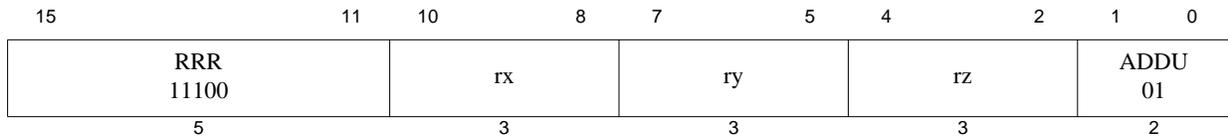

Format: ADDU *rz*, *rx*, *ry*

MIPS16e

Purpose: Add Unsigned Word (3-Operand)

To add 32-bit integers.

Description: $GPR[rz] \leftarrow GPR[rx] + GPR[ry]$

The contents of GPR *rx* and GPR *ry* are added together to form a 32-bit result. The result is sign-extended and placed into GPR *rz*.

No integer overflow exception occurs under any circumstances.

Restrictions:

If either GPR *rx* or GPR *ry* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) or NotWordValue(GPR[Xlat(ry)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] + GPR[Xlat(ry)]
GPR[Xlat(rz)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

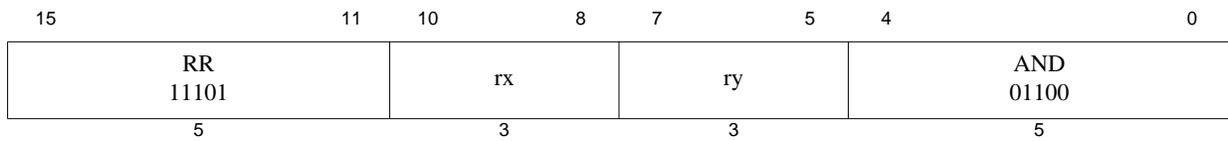

Format: AND *rx*, *ry*

MIPS16e

Purpose: AND

To do a bitwise logical AND.

Description: $GPR[rx] \leftarrow GPR[rx] \text{ AND } GPR[ry]$

The contents of GPR *ry* are combined with the contents of GPR *rx* in a bitwise logical AND operation. The result is placed in GPR *rx*.

Restrictions:


None

Operation:

$GPR[Xlat(rx)] \leftarrow GPR[Xlat(rx)] \text{ and } GPR[Xlat(ry)]$

Exceptions:

None

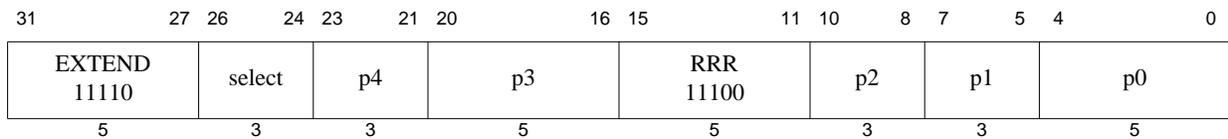

Format: ASMACRO *select*, *p0*, *p1*, *p2*, *p3*, *p4*

MIPS16e

The format listed is the most generic assembler format and is unlikely to be used for an actual implementation of application-specific macro instructions. Rather, the assembler format is likely to represent the use of the macro, with the assembler turning that format into the appropriate bit pattern required by the instruction.

Purpose: Application-Specific Macro Instructions

To execute an implementation-definable macro instruction.

Description:

The ASMACRO instruction is the programming interface to the implementation-definable macro instruction facility that is defined by the MIPS16e architecture.

The *select* field specifies which of 8 possible macros is expanded. The definition of each macro specifies how the parameters *p0*, *p1*, *p2*, *p3*, and *p4* are substituted into the 32-bit instructions with which the macro is defined. The execution of the 32-bit instructions occurs while PC remains unchanged.

It is implementation-dependent whether a processor implements any implementation-definable macro instructions and, if it does, how many. It is implementation-dependent whether the macro is executed with interrupts disabled.

Restrictions:

The 32-bit instructions with which the macro is defined must be chosen with care. Issues of atomicity, restartability of the instruction sequence, and similar factors must be considered when using the implementation-definable macro instruction facility. Failure to do so can cause **UNPREDICTABLE** behavior.

If implementation-definable macro instructions are not implemented by the processor, or if the *select* field references a specific macro which is not implemented by the processor, a Reserved Instruction exception is signaled.

Operation:

ExecuteMacro(*sel*, *p0*, *p1*, *p2*, *p3*, *p4*)


Exceptions:

Reserved Instruction

Others as may be generated by the 32-bit instructions included in each macro expansion.

Programming Notes:

Implementations may impose certain restrictions on 32-bit instructions are supported within an ASMACRO instruction. For instance, many implementations may not allow loads, stores, branches or jumps within an ASMACRO definition. Refer to the Users Guide for each processor which implements this capability for a list of macros defined and implemented by that processor, and for any specific restrictions imposed by that processor.

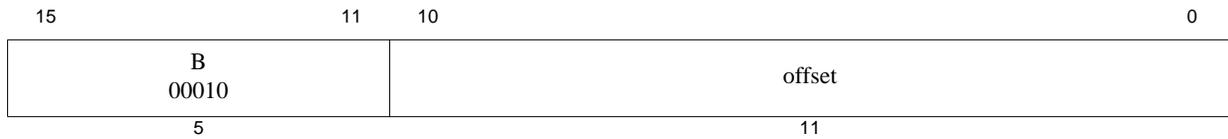

Format: B offset

MIPS16e

Purpose: Unconditional Branch

To do an unconditional PC-relative branch.

Description: branch

The 11-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. The program branches to the target address unconditionally.

Restrictions:

None

Operation:


I: $PC \leftarrow PC + 2 + \text{sign_extend}(\text{offset} \ll 1)$

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

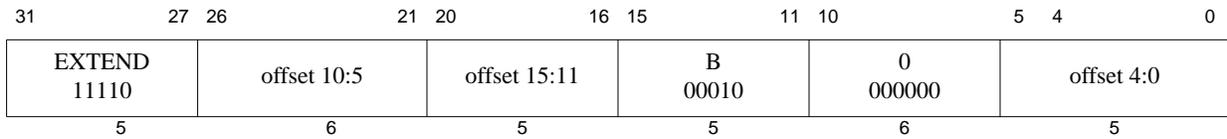

Format: B offset

MIPS16e

Purpose: Unconditional Branch (Extended)

To do an unconditional PC-relative branch.

Description: branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. The program branches to the target address unconditionally.

Restrictions:

None

Operation:


I: $PC \leftarrow PC + 4 + \text{sign_extend}(\text{offset} \ll 1)$

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

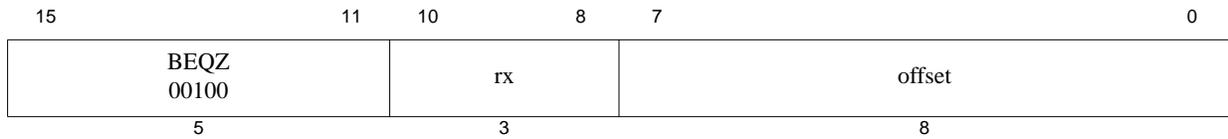

Format: BEQZ *rx*, *offset*

MIPS16e

Purpose: Branch on Equal to Zero

To test a GPR then do a PC-relative conditional branch.

Description: if (GPR[*rx*] = 0) then branch

The 8-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rx* are equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[Xlat(rx)] = 0GPRLEN)
        if condition then
            PC ← PC + 2 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

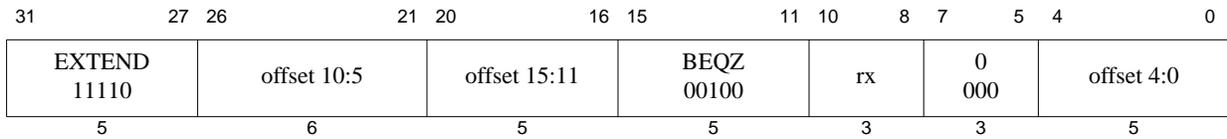

Format: BEQZ *rx*, *offset*

MIPS16e

Purpose: Branch on Equal to Zero (Extended)

To test a GPR then do a PC-relative conditional branch.

Description: if (GPR[*rx*] = 0) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rx* are equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[Xlat(rx)] = 0GPRLEN)
        if condition then
            PC ← PC + 4 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

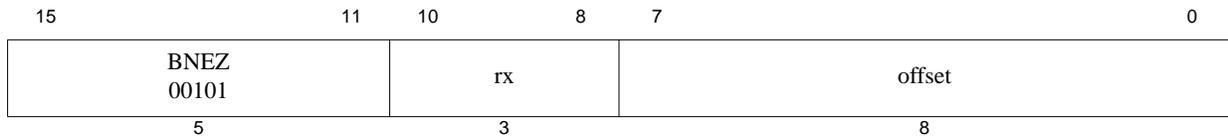

Format: BNEZ *rx*, *offset*

MIPS16e

Purpose: Branch on Not Equal to Zero

To test a GPR then do a PC-relative conditional branch.

Description: if (GPR[*rx*] \neq 0) then branch

The 8-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rx* are not equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[Xlat(rx)]  $\neq$  0GPRELEN)
        if condition then
            PC ← PC + 2 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

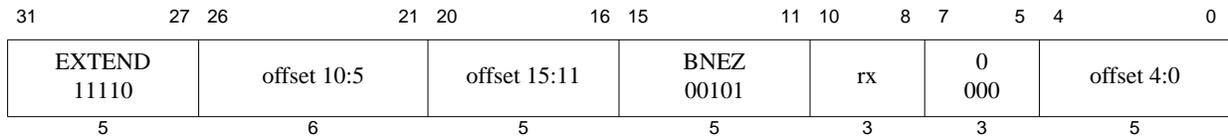

Format: BNEZ *rx*, *offset*

MIPS16e

Purpose: Branch on Not Equal to Zero (Extended)

To test a GPR then do a PC-relative conditional branch.

Description: if (GPR[*rx*] ≠ 0) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR *rx* are not equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[Xlat(rx)] ≠ 0GPRELEN)
        if condition then
            PC ← PC + 4 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

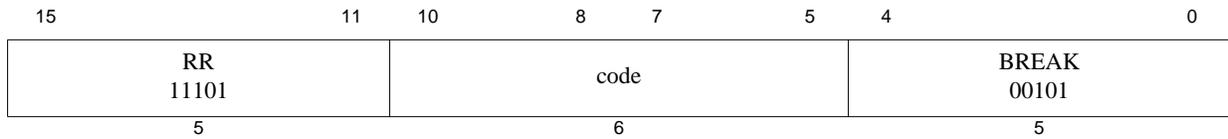

Format: BREAK immediate

MIPS16e

Purpose: Breakpoint

To cause a Breakpoint exception.

Description:

A breakpoint exception occurs, immediately and unconditionally transferring control to the exception handler.

Restrictions:

None

Operation:


`SignalException(Breakpoint)`

Exceptions:

Breakpoint

Programming Notes:

The *code* field is available for use as software parameters, but is retrieved by the exception handler only by loading the contents of the memory halfword containing the instruction.

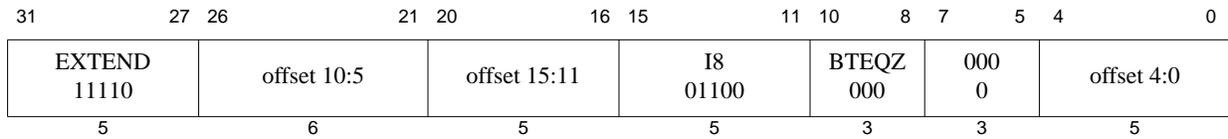

Format: BTEQZ offset

MIPS16e

Purpose: Branch on T Equal to Zero (Extended)

To test special register T then do a PC-relative conditional branch.

Description: if (T = 0) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR 24 are equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[24] = 0GPRLEN)
        if condition then
            PC ← PC + 4 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

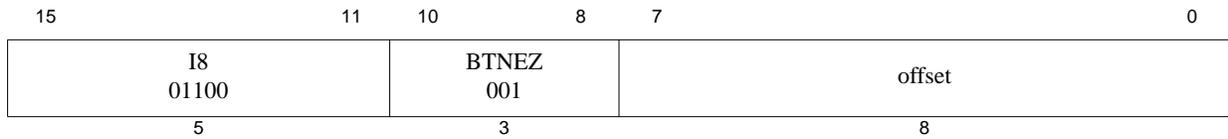

Format: BTNEZ offset

MIPS16e

Purpose: Branch on T Not Equal to Zero

To test special register T then do a PC-relative conditional branch.

Description: if (T ≠ 0) then branch

The 8-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR 24 are not equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[24] ≠ 0GPRLEN)
        if condition then
            PC ← PC + 2 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

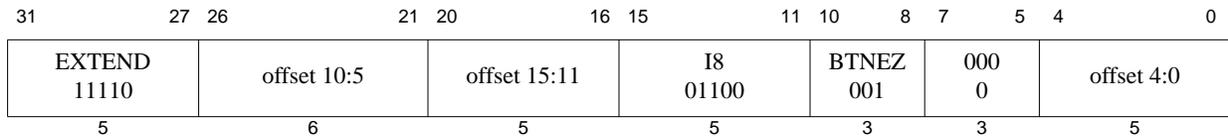

Format: BTNEZ offset

MIPS16e

Purpose: Branch on T Not Equal to Zero (Extended)

To test special register T then do a PC-relative conditional branch.

Description: if (T ≠ 0) then branch

The 16-bit *offset* is shifted left 1 bit, sign-extended, and then added to the address of the instruction after the branch to form the target address. If the contents of GPR 24 are not equal to zero, the program branches to the target address.

Restrictions:

None

Operation:

```

I:   tgt_offset ← sign_extend(offset || 0)
        condition ← (GPR[24] ≠ 0GPRLEN)
        if condition then
            PC ← PC + 4 + tgt_offset
        endif


```

Exceptions:

None

Programming Notes:

In MIPS16e mode, the branch *offset* is interpreted as halfword-aligned. This is unlike 32-bit MIPS mode, which interprets the *offset* value as word-aligned.

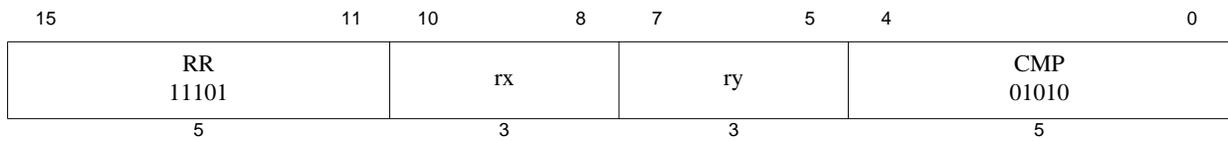

Format: `CMP rx, ry`

MIPS16e

Purpose: Compare

To compare the contents of two GPRs.

Description: $T \leftarrow \text{GPR}[rx] \text{ XOR } \text{GPR}[ry]$

The contents of GPR *ry* are Exclusive-ORed with the contents of GPR *rx*. The result is placed into GPR 24.

Restrictions:


None

Operation:

$\text{GPR}[24] \leftarrow \text{GPR}[\text{Xlat}(ry)] \text{ xor } \text{GPR}[\text{Xlat}(rx)]$

Exceptions:

None

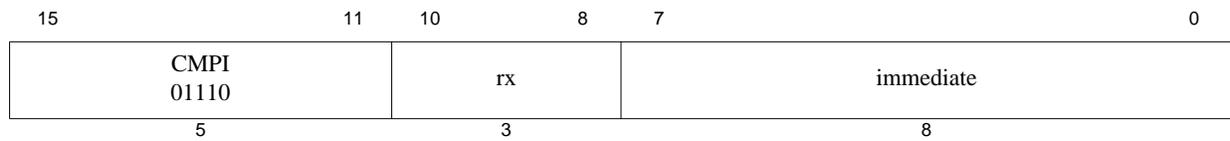

Format: CMPI *rx*, *immediate*

MIPS16e

Purpose: Compare Immediate

To compare a constant with the contents of a GPR.

Description: $T \leftarrow \text{GPR}[rx] \text{ XOR } \text{immediate}$

The 8-bit *immediate* is zero-extended and Exclusive-ORed with the contents of GPR *rx*. The result is placed into GPR 24.

Restrictions:


None

Operation:

$\text{GPR}[24] \leftarrow \text{GPR}[\text{Xlat}(rx)] \text{ xor } \text{zero_extend}(\text{immediate})$

Exceptions:

None

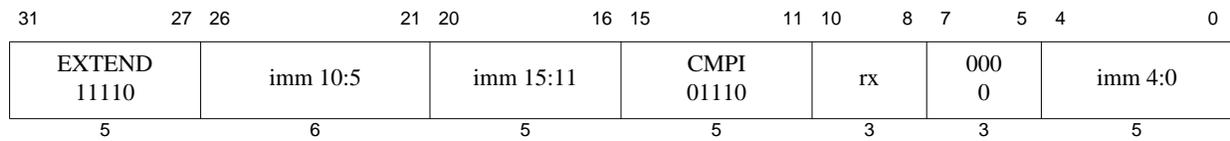

Format: CMPI *rx*, *immediate*

MIPS16e

Purpose: Compare Immediate (Extended)

To compare a constant with the contents of a GPR.

Description: $T \leftarrow \text{GPR}[rx] \text{ XOR } \text{immediate}$

The 16-bit *immediate* is zero-extended and Exclusive-ORed with the contents of GPR *rx*. The result is placed into GPR 24.

Restrictions:


None

Operation:

$\text{GPR}[24] \leftarrow \text{GPR}[\text{Xlat}(rx)] \text{ xor } \text{zero_extend}(\text{immediate})$

Exceptions:

None

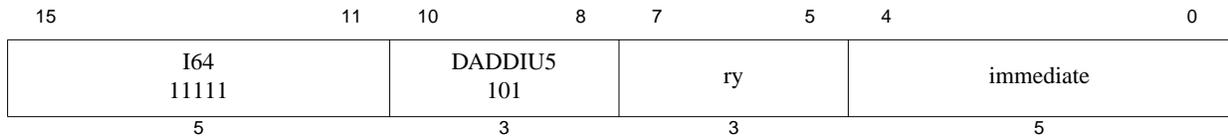

Format: DADDIU *ry*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (2-Operand)

To add a constant to a 64-bit integer.

Description: $GPR[ry] \leftarrow GPR[ry] + immediate$

The 5-bit *immediate* is sign-extended to 64 bits and then added to the contents of GPR *ry* to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[Xlat(ry)] + sign_extend(immediate)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

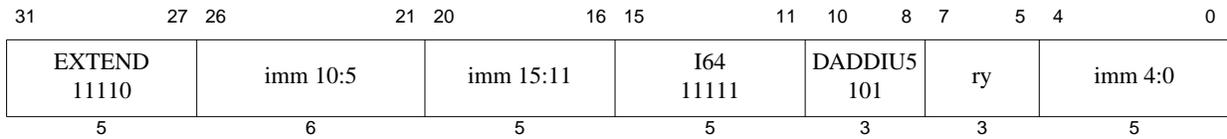

Format: DADDIU *ry*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (2-Operand, Extended)

To add a constant to a 64-bit integer.

Description: $GPR[ry] \leftarrow GPR[ry] + immediate$

The 16-bit *immediate* is sign-extended to 64 bits and then added to the contents of GPR *ry* to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[Xlat(ry)] + sign_extend(immediate)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

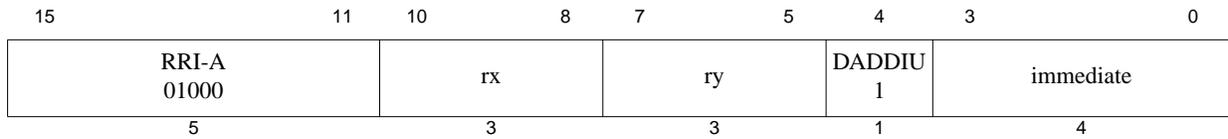

Format: DADDIU *ry*, *rx*, *immediate*

MIPS16e (64-bit only)

Purpose: Doubleword Add Immediate Unsigned (3-Operand)

To add a constant to a 64-bit integer.

Description: $GPR[ry] \leftarrow GPR[rx] + immediate$

The 4-bit *immediate* is sign-extended to 64 bits and then added to the contents of GPR *rx* to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[Xlat(rx)] + sign_extend(immediate)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

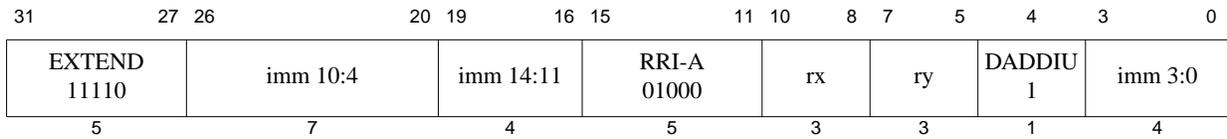

Format: DADDIU *ry*, *rx*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (3-Operand, Extended)

To add a constant to a 64-bit integer.

Description: $GPR[ry] \leftarrow GPR[rx] + immediate$

The 15-bit *immediate* is sign-extended to 64 bits and then added to the contents of GPR *rx* to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[Xlat(rx)] + sign_extend(immediate)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

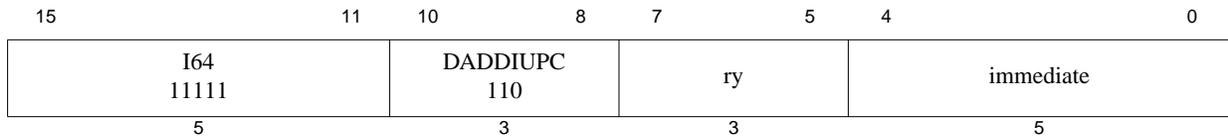

Format: DADDIU *ry*, *pc*, *immediate*

MIPS16e (64-bit only)

Purpose: Doubleword Add Immediate Unsigned (3-Operand, PC-Relative)

To add a constant to the program counter.

Description: $GPR[ry] \leftarrow PC + (immediate \ll 2)$

The 5-bit *immediate* is shifted left 2 bits, zero-extended, and added either to the address of the DADDIU instruction or to the address of the jump instruction in whose delay slot the DADDIU is executed. This result (with its 2 lower bits cleared) is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:

```

I-1:  base_pc ← PC
I:    if not (JumpDelaySlot(PC)) then
          base_pc ← PC
        endif
        GPR[Xlat(ry)] ← (base_pcGPREN-1..2 + zero_extend(immediate)) || 02


```

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

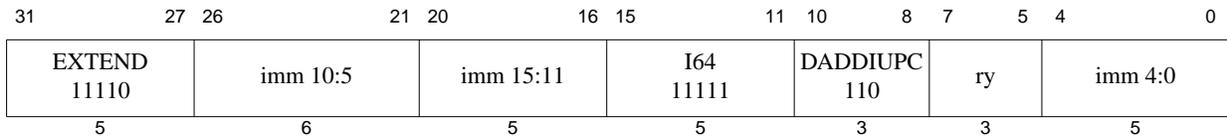

Format: DADDIU *ry*, *pc*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (3-Operand, PC-Relative, Extended)

To add a constant to the program counter.

Description: $GPR[ry] \leftarrow PC + immediate$

The 16-bit *immediate* is sign-extended and added to the address of the DADDIU instruction. Before the addition, the two lower bits of the instruction address are cleared. The result of the addition is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

A PC-relative extended DADDIU may not be placed in the delay slot of a jump instruction.

Operation:

$$temp \leftarrow (PC_{GPRLEN-1..2} || 0^2) + sign_extend(immediate)$$


$$GPR[Xlat(ry)] \leftarrow temp_{63..0}$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

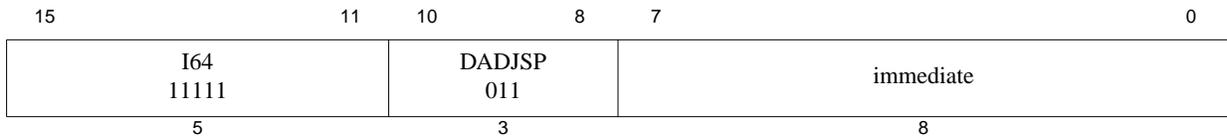

Format: DADDIU *sp*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (2-Operand, SP-Relative)

To add a constant to the stack pointer.

Description: $GPR[sp] \leftarrow GPR[sp] + immediate$

The 8-bit *immediate* is shifted left 3 bits, sign-extended to 64 bits, and then added to the contents of GPR 29 to form a 64-bit result. The result is placed in GPR 29.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[29] \leftarrow GPR[29] + sign_extend(immediate \parallel 0^3)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

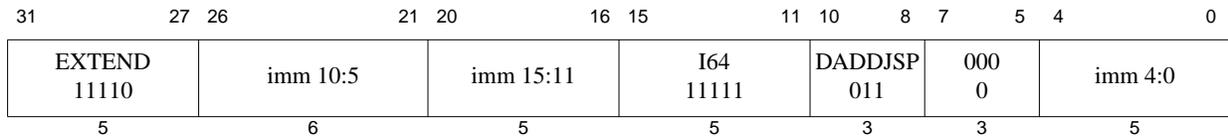

Format: DADDIU *sp*, *immediate*

MIPS16e (64-bit only)

Purpose: Doubleword Add Immediate Unsigned (2-Operand, SP-Relative, Extended)

To add a constant to the stack pointer.

Description: $GPR[sp] \leftarrow GPR[sp] + immediate$

The 16-bit *immediate* is sign-extended to 64 bits and then added to the contents of GPR 29 to form a 64-bit result. The result is placed in GPR 29.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$GPR[29] \leftarrow GPR[29] + sign_extend(immediate)$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

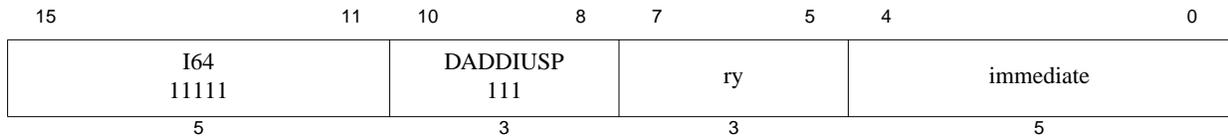

Format: DADDIU *ry*, *sp*, *immediate* **MIPS16e (64-bit only)**

Purpose: Doubleword Add Immediate Unsigned (3-Operand, SP-Relative)

To add a constant to the stack pointer.

Description: $GPR[ry] \leftarrow GPR[sp] + immediate$

The 5-bit *immediate* is shifted left 2 bits, zero-extended to 64 bits, and added to the contents of GPR 29 to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[29] + zero_extend(immediate \ || \ 0^2)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

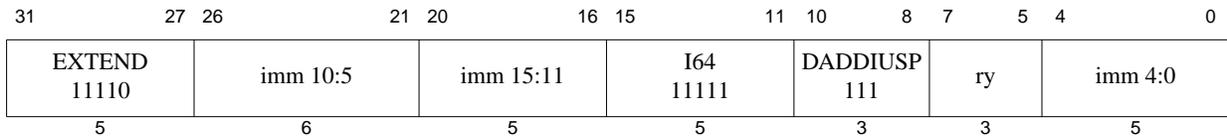

Format: DADDIU *ry*, *sp*, *immediate*

MIPS16e (64-bit only)

Purpose: Doubleword Add Immediate Unsigned (3-Operand, SP-Relative, Extended)

To add a constant to the stack pointer.

Description: $GPR[ry] \leftarrow GPR[sp] + immediate$

The 16-bit *immediate* is sign-extended to 64 bits and added to the contents of GPR 29 to form a 64-bit result. The result is placed in GPR *ry*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(ry)] \leftarrow GPR[29] + sign_extend(immediate)$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

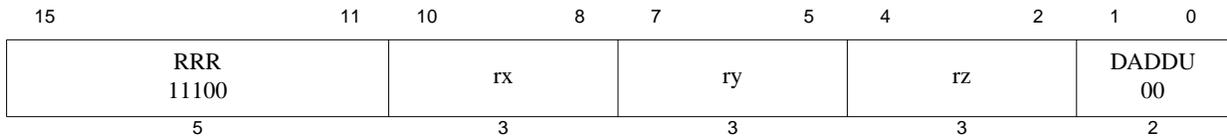

Format: DADDU *rz, rx, ry*

MIPS16e (64-bit only)

Purpose: Doubleword Add Unsigned (3-Operand)

To add 64-bit integers.

Description: $GPR[rz] \leftarrow GPR[rx] + GPR[ry]$

The contents of GPR *ry* are added to the contents of GPR *rx*. The 64-bit result is placed into GPR *rz*.

No integer overflow exception occurs under any circumstances.

Restrictions:

Operation:


$$GPR[Xlat(rz)] \leftarrow GPR[Xlat(rx)] + GPR[Xlat(ry)]$$

Exceptions:

Reserved Instruction

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 64-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

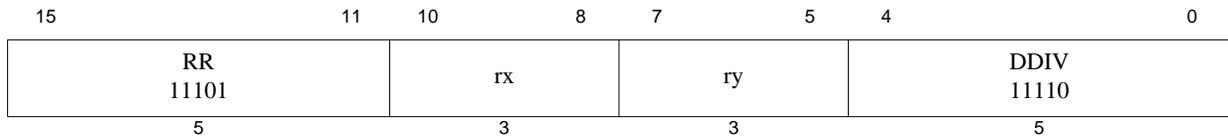

Format: DDIV *rx*, *ry* **MIPS16e (64-bit only)**

Purpose: Doubleword Divide

To divide 64-bit signed integers.

Description: (LO, HI) ← GPR[*rx*] / GPR[*ry*]

The 64-bit doubleword in GPR *rx* is divided by the 64-bit doubleword in GPR *ry*, treating both operands as signed values. The 64-bit quotient is placed into special register *LO* and the 64-bit remainder is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If the divisor in GPR *ry* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

$$\begin{aligned} LO &\leftarrow GPR[Xlat(rx)] \text{ div } GPR[Xlat(ry)] \\ HI &\leftarrow GPR[Xlat(rx)] \text{ mod } GPR[Xlat(ry)] \end{aligned}$$

Exceptions:


Reserved Instruction

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

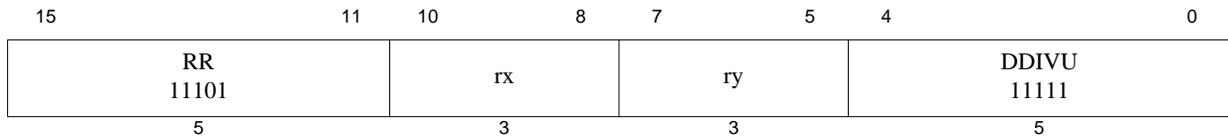

Format: DDIVU *rx*, *ry*

MIPS16e (64-bit only)

Purpose: Doubleword Divide Unsigned

To divide 64-bit unsigned integers.

Description: (LO, HI) ← GPR[*rx*] / GPR[*ry*]

The 64-bit doubleword in GPR *rx* is divided by the 64-bit doubleword in GPR *ry*, treating both operands as unsigned values. The 64-bit quotient is placed into special register *LO* and the 64-bit remainder is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

If the divisor in GPR *ry* is zero, the arithmetic result value is **UNPREDICTABLE**.

Operation:

```

q ← (0 || GPR[Xlat(rx)]) div (0 || GPR[Xlat(ry)])
r ← (0 || GPR[Xlat(rx)]) mod (0 || GPR[Xlat(ry)])
LO ← q63..0
HI ← r63..0
    
```

Exceptions:

Reserved Instruction

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.


Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

improvement by scheduling the divide so that other instructions can execute in parallel.

Historical Perspective:

In MIPS 1 through MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

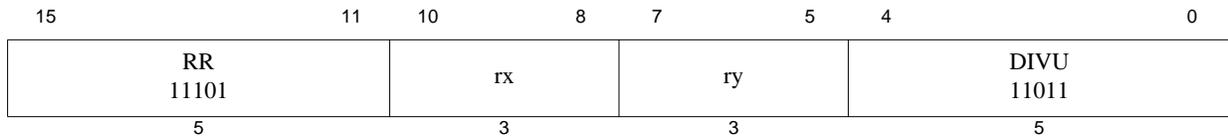

Format: DIVU *rx*, *ry*

MIPS16e

Purpose: Divide Unsigned Word

To divide 32-bit unsigned integers.

Description: $(LO, HI) \leftarrow GPR[rx] / GPR[ry]$

The 32-bit word value in GPR *rx* is divided by the 32-bit value in GPR *ry*, treating both operands as unsigned values. The 32-bit quotient is sign-extended and placed into special register *LO*, and the 32-bit remainder is sign-extended and placed into special register *HI*.

Restrictions:

If either GPR *rx* or GPR *ry* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

If the divisor in GPR *ry* is zero, the arithmetic result is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)]) or NotWordValue(GPR[Xlat(ry)])) then
  UNPREDICTABLE
endif
q ← (0 || GPR[Xlat(rx)]) div (0 || GPR[Xlat(ry)])
r ← (0 || GPR[Xlat(rx)]) mod (0 || GPR[Xlat(ry)])
LO ← sign_extend(q31..0)
HI ← sign_extend(r31..0)

```

Exceptions:


None

Programming Notes:

See “Programming Notes” for the [DIV](#) instruction.

Historical Perspective:

In MIPS 1 through MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and MIPS32 and all subsequent levels of the architecture.

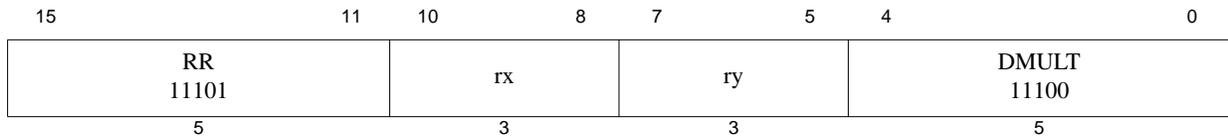

Format: DMULT *rx*, *ry*

MIPS16e (64-bit only)

Purpose: Doubleword Multiply

To multiply 64-bit signed integers.

Description: (LO, HI) ← GPR[*rx*] × GPR[*ry*]

The 64-bit doubleword value in GPR *rx* is multiplied by the 64-bit value in GPR *ry*, treating both operands as signed values, to produce a 128-bit result. The low-order 64-bit doubleword of the result is placed into special register *LO*, and the high-order 64-bit doubleword is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

Operation:

```

prod ← GPR[Xlat(rx)] × GPR[Xlat(ry)]
LO ← prod63..0
HI ← prod127..64
    
```

Exceptions:

Reserved Instruction


Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and all subsequent levels of the architecture.

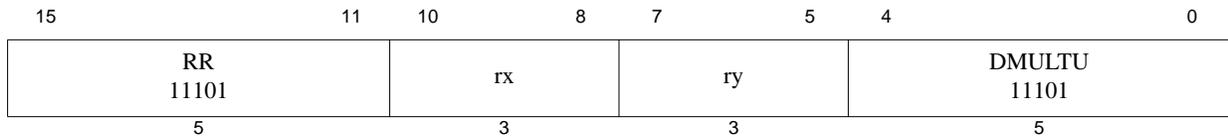

Format: DMULTU *rx*, *ry*

MIPS16e (64-bit only)

Purpose: Doubleword Multiply Unsigned

To multiply 64-bit unsigned integers.

Description: $(LO, HI) \leftarrow GPR[rx] \times GPR[ry]$

The 64-bit doubleword value in GPR *rx* is multiplied by the 64-bit value in GPR *ry*, treating both operands as unsigned values, to produce a 128-bit result. The low-order 64-bit doubleword of the result is placed into special register *LO*, and the high-order 64-bit doubleword is placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

Operation:

$$\begin{aligned} \text{prod} &\leftarrow (0 \parallel GPR[Xlat(rx)]) \times (0 \parallel GPR[Xlat(ry)]) \\ LO &\leftarrow \text{prod}_{63..0} \\ HI &\leftarrow \text{prod}_{127..64} \end{aligned}$$

Exceptions:

Reserved Instruction


Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Historical Perspective:

In MIPS III, if either of the two instructions preceding the divide is an MFHI or MFLO, the result of the MFHI or MFLO is **UNPREDICTABLE**. Reads of the *HI* or *LO* special register must be separated from subsequent instructions that write to them by two or more instructions. This restriction was removed in MIPS IV and all subsequent levels of the architecture.

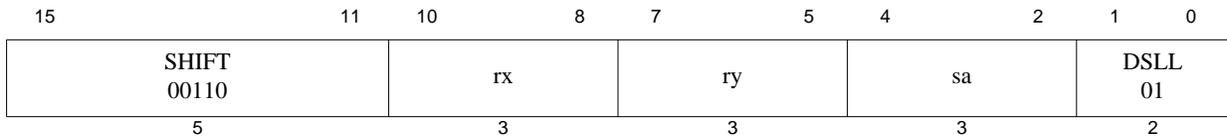

Format: DSLL *rx*, *ry*, *sa*

MIPS16e (64-bit only)

Purpose: Doubleword Shift Left Logical

To execute a left-shift of a doubleword by a fixed amount—1 to 8 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \ll sa$

The 64-bit doubleword contents of GPR *ry* are shifted left, and zeros are inserted into the emptied low-order bits. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8. The 64-bit result is placed into GPR *rx*.

Restrictions:


Operation: 64-bit processors

```

if sa = 03 then
    s ← 8
else
    s ← 03 || sa
endif
GPR[Xlat(rx)] ← GPR[Xlat(ry)](63-s)..0 || 0s
    
```

Exceptions:

Reserved Instruction

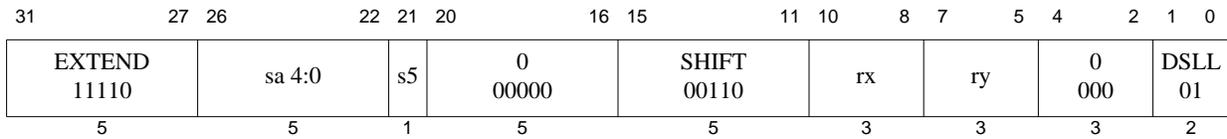

Format: DSLL *rx*, *ry*, *sa* **MIPS16e (64-bit only)**

Purpose: Doubleword Shift Left Logical (Extended)

To execute a left-shift of a doubleword by a fixed amount—0 to 63 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \ll sa$

The 64-bit doubleword contents of GPR *ry* are shifted left, and zeros are inserted into the emptied low-order bits. The *s5* bit and the 5-bit *sa* field specify the effective 6-bit-shift amount. The 64-bit result is placed into GPR *rx*.

Restrictions:

None

Operation: 64-bit processors

$$s \leftarrow s5 \parallel sa$$


$$GPR[Xlat(rx)] \leftarrow GPR[Xlat(ry)]_{(63-s)..0} \parallel 0^s$$

Exceptions:

Reserved Instruction

Programming Notes:

For DSLL only, the *s5* bit is the most-significant bit of the 6-bit-shift amount (*sa*) field. For all 32-bit extended shifts, *s5* must be zero. None of the extended shift instructions perform the zero-to-eight mapping, so zero-bit shifts are possible using the extended format.

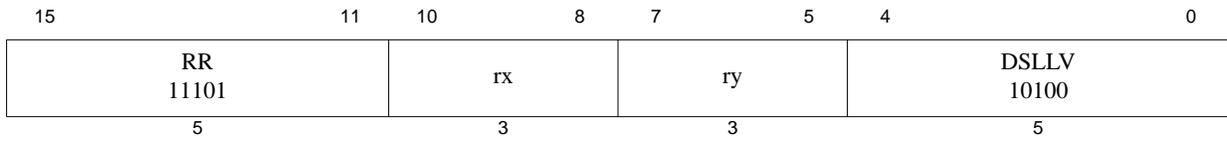

Format: DSLLV *ry*, *rx*

MIPS16e (64-bit only)

Purpose: Doubleword Shift Left Logical Variable

To execute a left-shift of a doubleword by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \ll GPR[rx]$

The 64-bit doubleword contents of GPR *ry* are shifted left, inserting zeros into the emptied bits; the result is placed back into GPR *ry*. The 6 low-order bits of GPR *rx* specify the shift amount.

Restrictions:


Operation: 64-bit processors

$$s \leftarrow GPR[Xlat(rx)]_{5..0}$$

$$GPR[Xlat(ry)] \leftarrow GPR[Xlat(ry)]_{(63-s)..0} \parallel 0^s$$

Exceptions:

Reserved Instruction

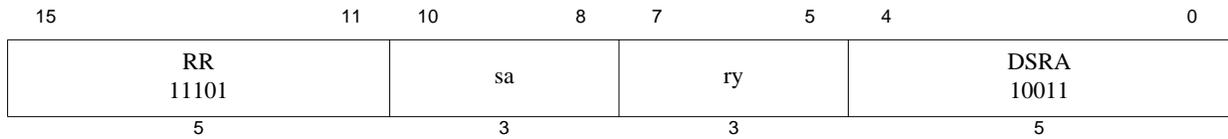

Format: DSRA *ry*, *sa*

MIPS16e (64-bit only)

Purpose: Doubleword Shift Right Arithmetic

To execute an arithmetic right-shift of a doubleword by a fixed amount—1 to 8 bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg sa$ (arithmetic)

The 64-bit doubleword contents of GPR *ry* are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed in back in GPR *ry*. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8.

Restrictions:

Operation:


```

if sa = 03 then
  s ← 8
else
  s ← 03 || sa
endif
GPR[Xlat(ry)] ← (GPR[Xlat(ry)]63)s || GPR[Xlat(ry)]63..s

```

Exceptions:

Reserved Instruction

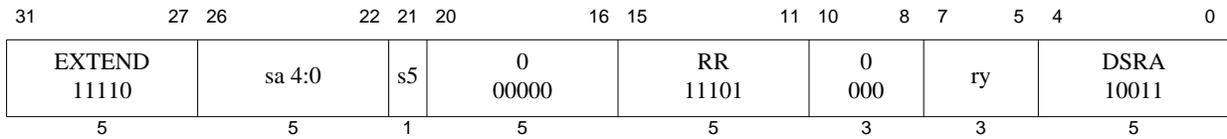

Format: DSRA *ry*, *sa*

MIPS16e (64-bit only)

Purpose: Doubleword Shift Right Arithmetic (Extended)

To execute an arithmetic right-shift of a doubleword by a fixed amount—0 to 63 bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg sa$ (arithmetic)

The 64-bit doubleword contents of GPR *ry* are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed in back in GPR *ry*. The *s5* bit and the 5-bit *sa* field specify the effective 6-bit-shift amount.

Restrictions:

Operation:

$$s \leftarrow s5 \ || \ sa$$


$$GPR[Xlat(ry)] \leftarrow (GPR[Xlat(ry)]_{63})^s \ || \ GPR[Xlat(ry)]_{63..s}$$

Exceptions:

Reserved Instruction

Programming Notes:

The *s5* bit is the most-significant bit of the 6-bit-shift amount (*sa*) field. None of the extended shift instructions perform the zero-to-eight mapping, so zero-bit shifts are possible using the extended format.

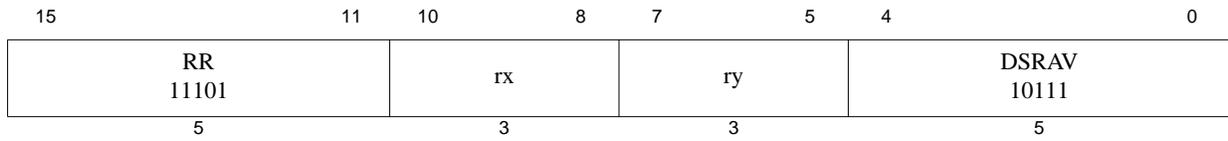

Format: DSRAV *ry*, *rx* **MIPS16e (64-bit only)**

Purpose: Doubleword Shift Right Arithmetic Variable

To execute an arithmetic right-shift of a doubleword by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg GPR[rx]$ (arithmetic)

The doubleword contents of GPR *ry* are shifted right, duplicating the sign bit (63) into the emptied bits; the result is placed back in GPR *ry*. The 6 low-order bits of GPR *rx* specify the shift amount.

Restrictions:


Operation:

$$s \leftarrow GPR[Xlat(rx)]_{5..0}$$

$$GPR[Xlat(ry)] \leftarrow (GPR[Xlat(ry)]_{63})^s \parallel GPR[Xlat(ry)]_{63..s}$$

Exceptions:

Reserved Instruction

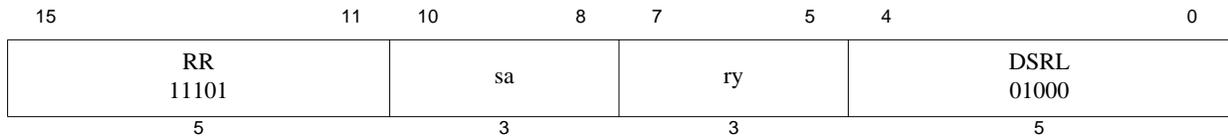

Format: DSRL *ry*, *sa* **MIPS16e (64-bit only)**

Purpose: Doubleword Shift Right Logical

To execute a logical right-shift of a doubleword by a fixed amount—1 to 8 bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg sa$ (logical)

The doubleword contents of GPR *ry* are shifted right, inserting zeros into the emptied bits; the result is placed back in GPR *ry*. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8.

Restrictions:


Operation:

```

if sa = 03 then
    s ← 8
else
    s ← 03 || sa
endif
GPR[Xlat(ry)] ← 0s || GPR[Xlat(ry)]63..s
    
```

Exceptions:

Reserved Instruction

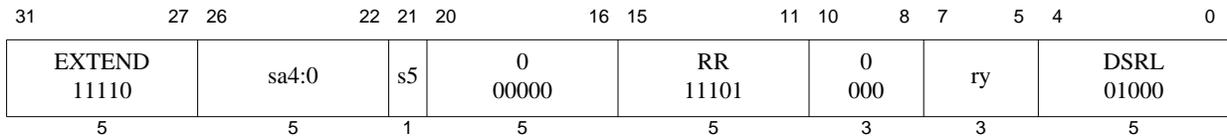

Format: DSRL *ry*, *sa* **MIPS16e (64-bit only)**

Purpose: Doubleword Shift Right Logical (Extended)

To execute a logical right-shift of a doubleword by a fixed amount—0 to 63 bits

Description: $GPR[ry] \leftarrow GPR[ry] \gg sa$ (logical)

The doubleword contents of GPR *ry* are shifted right, inserting zeros into the emptied bits; the result is placed back in GPR *ry*. The *s5* bit and the 5-bit *sa* field specify the effective 6-bit-shift amount.

Restrictions:

Operation: 64-bit processors

$$s \leftarrow s5 \mid\mid sa$$


$$GPR[Xlat(ry)] \leftarrow 0^s \mid\mid GPR[Xlat(ry)]_{63..s}$$

Exceptions:

Reserved Instruction

Programming Notes:

The *s5* bit is the most-significant bit of the 6-bit-shift amount (*sa*) field. None of the extended shift instructions perform the zero-to-eight mapping, so zero-bit shifts are possible using the extended format.

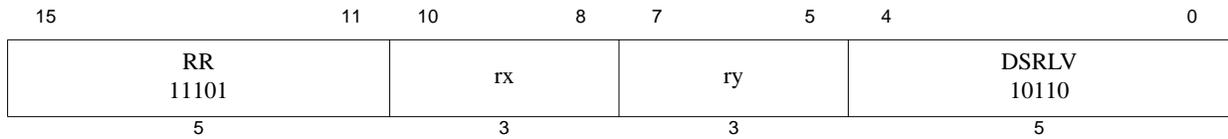

Format: DSRLV *ry*, *rx*

MIPS16e (64-bit only)

Purpose: Doubleword Shift Right Logical Variable

To execute a logical right-shift of a doubleword by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg GPR[rx]$ (logical)

The 64-bit doubleword contents of GPR *ry* are shifted right, inserting zeros into the emptied bits; the result is placed back in GPR *ry*. The 6 low-order bits of GPR *rx* specify the shift amount.

Restrictions:


Operation: 64-bit processors

$$s \leftarrow GPR[Xlat(rx)]_{5..0}$$

$$GPR[Xlat(ry)] \leftarrow 0^s \parallel GPR[Xlat(ry)]_{63..s}$$

Exceptions:

Reserved Instruction

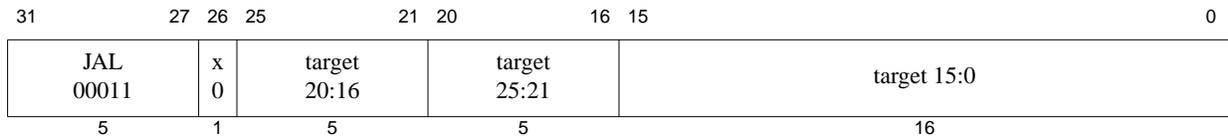

Format: JAL target

MIPS16e

Purpose: Jump and Link

To execute a procedure call within the current 256 MB-aligned region and preserve the current ISA.

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 256 MB-aligned region. The low 28 bits of the target address is the *target* field shifted left 2 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address, preserving the ISA Mode bit. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

The opcode field describes a general jump-and-link operation, with the *x* field as a variable. The individual instructions, JAL and JALX have specific values for this variables.

Restrictions:

An extended instruction should not be placed in a jump delay slot as it causes one-half of an instruction to be executed.

Processor operation is **UNPREDICTABLE** if a branch or jump instruction is placed in the delay slot of a jump.

Operation:

$$\begin{aligned} \mathbf{I:} \quad & \text{GPR}[31] \leftarrow (\text{PC} + 6)_{\text{GPRLEN}-1..1} \mid \mid \text{ISAMode} \\ \mathbf{I+1:} \quad & \text{PC} \leftarrow \text{PC}_{\text{GPRLEN}-1..28} \mid \mid \text{target} \mid \mid 0^2 \end{aligned}$$


Exceptions:

None

Programming Notes:

Forming the jump target address by concatenating PC and the 26-bit target address rather than adding a signed *offset* to the PC is an advantage if all program code addresses fit into a 256 MB region aligned on a 256 MB boundary. It allows a branch from anywhere in the region to anywhere in the region, an action not allowed by a signed relative *offset*.

This definition creates the boundary case where the jump instruction is in the last word of a 256 MB region and can therefore jump only to the following 256 MB region containing the jump delay slot.

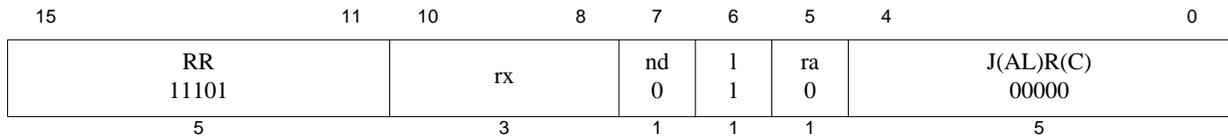

Format: JALR *ra*, *rx*

MIPS16e

Purpose: Jump and Link Register

To execute a procedure call to an instruction address in a register.

Description: $GPR[ra] \leftarrow return_addr$, $PC \leftarrow GPR[rx]$

The program unconditionally jumps to the address contained in GPR *rx*, with a delay of one instruction. The instruction sets the *ISA Mode* bit to the value in GPR *rx* bit 0.

The address of the instruction following the delay slot is placed into GPR 31. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR *rx* must be naturally-aligned. If bit 0 is zero and bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

An extended instruction should not be placed in a jump delay slot, because this causes one-half of an instruction to be executed.


Processor operation is **UNPREDICTABLE** if a branch or jump instruction is placed in the delay slot of a jump.

Operation:

I: $GPR[31] \leftarrow (PC + 4)_{GPRLEN-1..1} \parallel ISAMode$
I+1: $PC \leftarrow GPR[Xlat(rx)]_{GPRLEN-1..1} \parallel 0$
 $ISAMode \leftarrow GPR[Xlat(rx)]_0$

Exceptions:

None

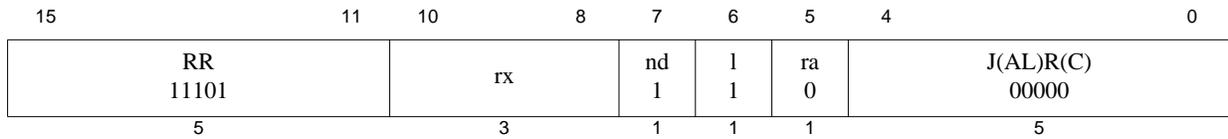

Format: JALRC ra, rx

MIPS16e

Purpose: Jump and Link Register, Compact

To execute a procedure call to an instruction address in a register

Description: $GPR[ra] \leftarrow return_addr, PC \leftarrow GPR[rx]$

The program unconditionally jumps to the address contained in GPR *rx*, with no delay slot instruction. The instruction sets the *ISA Mode* bit to the value in GPR *rx* bit 0.

The address of the instruction following the jump is placed into GPR 31. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR *rx* must be naturally-aligned. If bit 0 is zero and bit 1 is one, an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

Operation:


$$\begin{aligned} \mathbf{I:} \quad & GPR[31] \leftarrow (PC + 2)_{GPRLEN-1..1} \quad || \quad ISAMode \\ & PC \leftarrow GPR[Xlat(rx)]_{GPRLEN-1..1} \quad || \quad 0 \\ & ISAMode \leftarrow GPR[Xlat(rx)]_0 \end{aligned}$$

Exceptions:

None.

Programming Notes:

Unlike most “jump” instructions in the MIPS instruction set, JALRC does not have a delay slot.

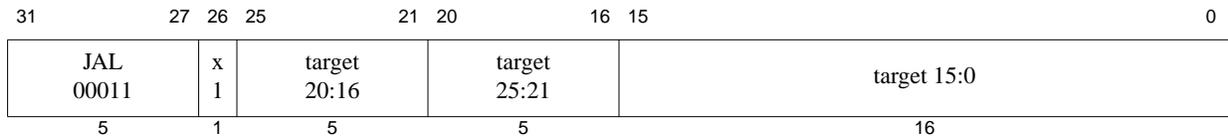

Format: JALX target

MIPS16e

Purpose: Jump and Link Exchange (MIPS16e Format)

To execute a procedure call within the current 256 MB-aligned region and change the ISA Mode from MIPS16e to 32-bit MIPS.

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 256 MB-aligned region. The low 28 bits of the target address is the *target* field shifted left 2 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address, toggling the *ISA Mode* bit. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

The opcode field describes a general jump-and-link operation, with the *x* field as a variable. The individual instructions, JAL and JALX have specific values for this variables.

Restrictions:

An extended instruction should not be placed in a jump delay slot, because this causes one-half an instruction to be executed.

Processor operation is **UNPREDICTABLE** if a branch or jump instruction is placed in the delay slot of a jump.

Operation:

I: GPR[31] ← (PC + 6)_{GPRLEN-1..1} || ISAMode
I+1: PC ← PC_{GPRLEN-1..28} || target || 0²
 ISAMode ← (not ISAMode)


Exceptions:

None

Programming Notes:

Forming the jump target address by catenating PC and the 26-bit target address rather than adding a signed *offset* to the PC is an advantage if all program code addresses fit into a 256 MB region aligned on a 256 MB boundary. It allows a jump to anywhere in the region from anywhere in the region which a signed relative *offset* would not allow.

This definition creates the boundary case where the jump instruction is in the last word of a 256 MB region and can therefore jump only to the following 256 MB region containing the jump delay slot.

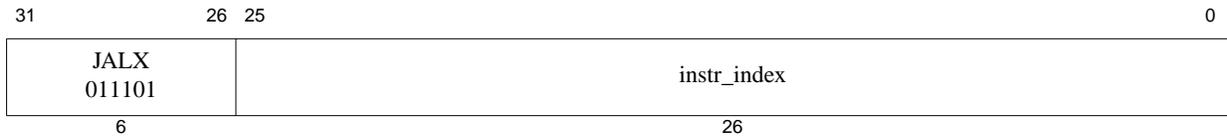

Format: JALX target

MIPS64 with MIPS16e

Purpose: Jump and Link Exchange (32-bit MIPS Format)

To execute a procedure call within the current 256 MB-aligned region and change the *ISA Mode* from 32-bit MIPS to MIPS16e.

Description:

Place the return address link in GPR 31. The return link is the address of the second instruction following the branch, at which location execution continues after a procedure call. The value stored in GPR 31 bit 0 reflects the current value of the *ISA Mode* bit.

This is a PC-region branch (not PC-relative); the effective target address is in the “current” 256 MB-aligned region. The low 28 bits of the target address is the *instr_index* field shifted left 2 bits. The remaining upper bits are the corresponding bits of the address of the instruction in the delay slot (not the branch itself).

Jump to the effective target address, toggling the *ISA Mode* bit. Execute the instruction that follows the jump, in the branch delay slot, before executing the jump itself.

Restrictions:

Processor operation is **UNPREDICTABLE** if a branch, jump, ERET, DERET, or WAIT instruction is placed in the delay slot of a branch or jump.

Operation:

I: GPR[31] ← PC + 8
I+1: PC ← PC_{GPRLEN..28} || instr_index || 0²
 ISAMode ← (not ISAMode)


Exceptions:

None

Programming Notes:

Forming the branch target address by catenating PC and index bits rather than adding a signed offset to the PC is an advantage if all program code addresses fit into a 256 MB region aligned on a 256 MB boundary. It allows a branch from anywhere in the region to anywhere in the region, an action not allowed by a signed relative offset.

This definition creates the following boundary case: When the branch instruction is in the last word of a 256 MB region, it can branch only to the following 256 MB region containing the branch delay slot.

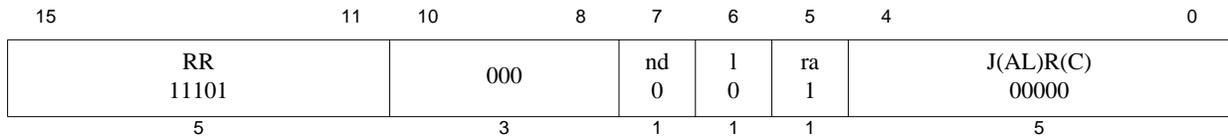

Format: JR ra

MIPS16e

Purpose: Jump Register Through Register ra

To execute a branch to the instruction address in the return address register.

Description: $PC \leftarrow GPR[ra]$

The program unconditionally jumps to the address specified in GPR 31, with a delay of one instruction. The instruction sets the *ISA Mode* bit to the value in GPR 31 bit 0.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR 31 must be naturally-aligned. If bit 0 is zero and bit 1 is one, then an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

An extended instruction should not be placed in a jump delay slot, because this causes one-half of an instruction to be executed.


Processor operation is **UNPREDICTABLE** if a branch or jump instruction is placed in the delay slot of a jump.

Operation:

I+1: $PC \leftarrow GPR[31]_{GPREN-1..1} \parallel 0$
 $ISAMode \leftarrow GPR[31]_0$

Exceptions:

None

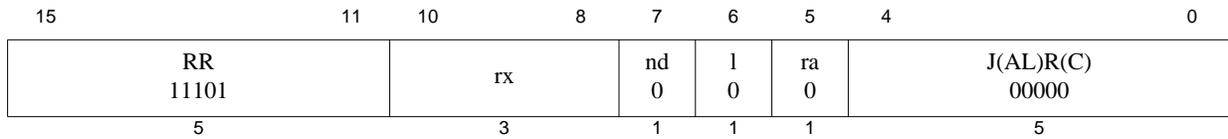

Format: JR rx

MIPS16e

Purpose: Jump Register Through MIPS16e GPR

To execute a branch to an instruction address in a register.

Description: $PC \leftarrow GPR[rx]$

The program unconditionally jumps to the address specified in GPR *rx*, with a delay of one instruction. The instruction sets the *ISA Mode* bit to the value in GPR *rx* bit 0.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR *rx* must be naturally aligned. If bit 0 is zero and bit 1 is one, then an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

An extended instruction should not be placed in a jump delay slot, because this causes one-half of an instruction to be executed.


Processor operation is **UNPREDICTABLE** if a branch or jump instruction is placed in the delay slot of a jump.

Operation:

I+1: $PC \leftarrow GPR[Xlat(rx)]_{GPRLEN-1..1} || 0$
 $ISAMode \leftarrow GPR[Xlat(rx)]_0$

Exceptions:

None

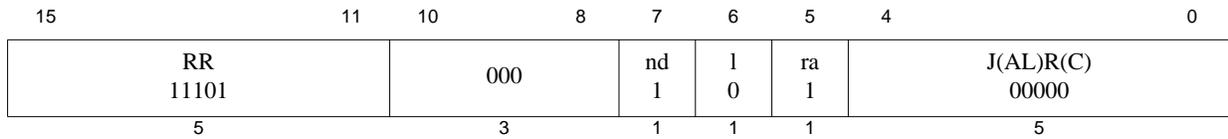

Format: JRC *ra*

MIPS16e

Purpose: Jump Register Through Register *ra*, Compact

To execute a branch to the instruction address in the return address register.

Description: $PC \leftarrow GPR[ra]$

The program unconditionally jumps to the address specified in GPR 31, with no delay slot instruction. The instruction sets the *ISA Mode* bit to the value in GPR 31 bit 0.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR 31 must be naturally-aligned. If bit 0 is zero and bit 1 is one, then an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

Operation:


I: $PC \leftarrow GPR[31]_{GPRLEN-1..1} || 0$
 $ISAMode \leftarrow GPR[31]_0$

Exceptions:

None.

Programming Notes:

Unlike most MIPS “jump” instructions, JRC does not have a delay slot.

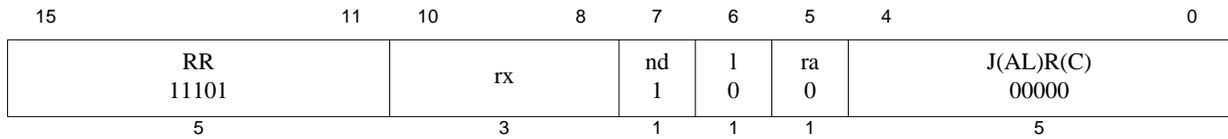

Format: JRC rx

MIPS16e

Purpose: Jump Register Through MIPS16e GPR, Compact

To execute a branch to an instruction address in a register

Description: $PC \leftarrow GPR[rx]$

The program unconditionally jumps to the address specified in GPR *rx*, with no delay slot instruction. The instruction sets the *ISA Mode* bit to the value in GPR *rx* bit 0.

Bit 0 of the target address is always zero so that no Address Exceptions occur when bit 0 of the source register is one.

The opcode and function field describe a general jump-thru-register operation, with the *nd* (no delay slot), *l* (link), and *ra* (source register is *ra*) fields as variables. The individual instructions, JALR, JR, JALRC, and JRC have specific values for these variables.

Restrictions:

The effective target address in GPR *rx* must be naturally-aligned. If bit 0 is zero and bit 1 is one, then an Address Error exception occurs when the jump target is subsequently fetched as an instruction.

Operation:

$$\mathbf{I:} \quad PC \leftarrow GPR[Xlat(rx)]_{GPRLEN-1..1} \parallel 0$$


$$ISAMode \leftarrow GPR[Xlat(rx)]_0$$

Exceptions:

None.

Programming Notes:

Unlike most MIPS “jump” instructions, JRC does not have a delay slot.

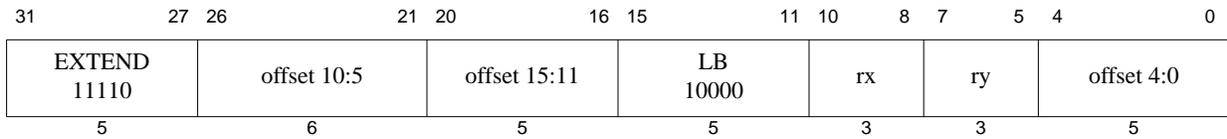

Format: LB *ry*, offset(*rx*)

MIPS16e

Purpose: Load Byte (Extended)

To load a byte from memory as a signed value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 16-bit *offset* is sign-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the byte at the memory location specified by the effective address are sign-extended and loaded into GPR *ry*.

Restrictions:


None

Operation:

```
vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddr_PSIZE-1..3 || (pAddr_2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory(CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr_2..0 xor BigEndianCPU3
GPR[Xlat(ry)] ← sign_extend(memdoubleword7+8*byte..8*byte)
```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

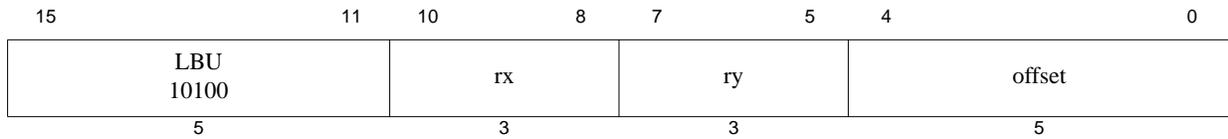

Format: LBU *ry*, offset(*rx*)

MIPS16e

Purpose: Load Byte Unsigned

To load a byte from memory as an unsigned value

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is zero-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the byte at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

None

Operation:


```

vAddr ← zero_extend(offset) + GPR[Xlat(rx)]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory(CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor BigEndianCPU3
GPR[Xlat(ry)] ← zero_extend(memdoubleword7+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

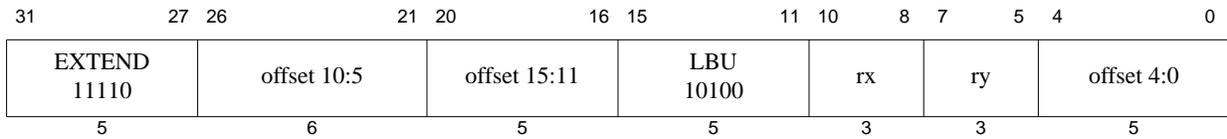

Format: LBU *ry*, offset(*rx*)

MIPS16e

Purpose: Load Byte Unsigned (Extended)

To load a byte from memory as an unsigned value

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 16-bit *offset* is sign-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the byte at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

None

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddr_PSIZE-1..3 || (pAddr_2..0 xor ReverseEndian3)
memdoubleword ← LoadMemory(CCA, BYTE, pAddr, vAddr, DATA)
byte ← vAddr_2..0 xor BigEndianCPU3
GPR[Xlat(ry)] ← zero_extend(memdoubleword7+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

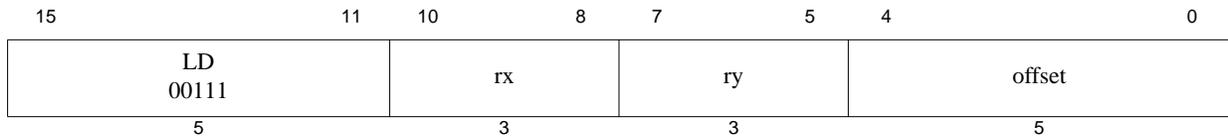

Format: LD *ry*, offset(*rx*)

MIPS16e (64-bit only)

Purpose: Load Doubleword

To load a doubleword from memory.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, then added to the contents of GPR *rx* to form the effective address. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 03) + GPR[Xlat(rx)]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
memdoubleword ← LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[Xlat(ry)] ← memdoubleword

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

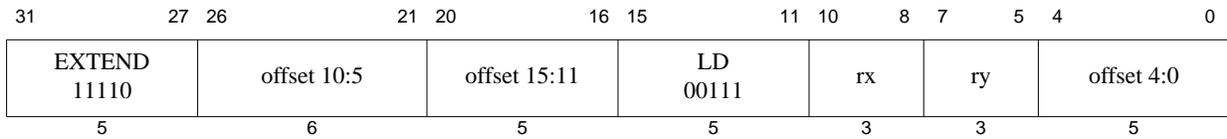

Format: LD *ry*, offset(*rx*)

MIPS16e (64-bit only)

Purpose: Load Doubleword (Extended)

To load a doubleword from memory.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR *rx* to form the effective address. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
memdoubleword ← LoadMemory(CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[Xlat(ry)] ← memdoubleword

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

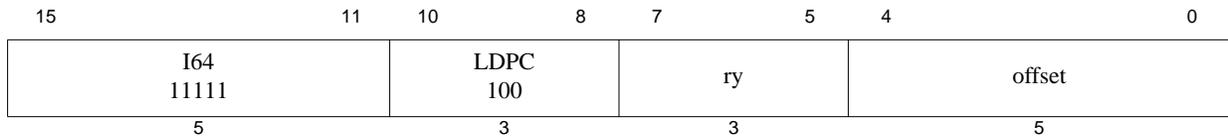

Format: LD *ry*, *offset*(*pc*)

MIPS16e (64-bit only)

Purpose: Load Doubleword (PC-Relative)

To load a PC-relative doubleword from memory.

Description: $GPR[ry] \leftarrow \text{memory}[PC + \text{offset}]$

The 5-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, and added either to the address of the LD instruction or to the address of the jump instruction in whose delay slot the LD is executed. The 3 lower bits of this result are cleared to form the effective address. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

Operation:

```

I-1:  base_pc ← PC
I:    if not (JumpDelaySlot(PC)) then
          base_pc ← PC
        endif
        vAddr ← (base_pcGPREN-1..3 + zero_extend(offset)) || 03
        (pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
        memdoubleword ← LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
        GPR[Xlat(ry)] ← memdoubleword


```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Reserved Instruction

Programming Note

For the purposes of watchpoints (provided by the CP0 *WatchHi* and *WatchLo* registers) and EJTAG breakpoints, the PC-relative reference is considered to be a data, rather than an instruction reference. That is, the watchpoint or breakpoint is triggered only if enabled for data references.

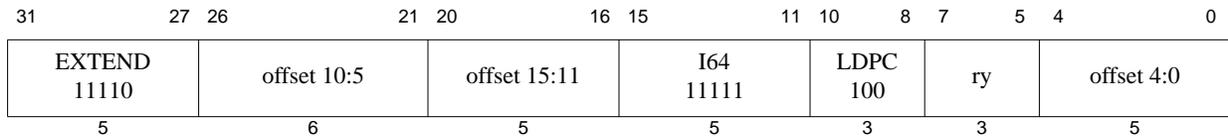

Format: LD *ry*, offset(*pc*)

MIPS16e (64-bit only)

Purpose: Load Doubleword (PC-Relative, Extended)

To load a PC-relative doubleword from memory.

Description: GPR[*ry*] ← memory[PC + offset]

The 16-bit *offset* is sign-extended and added to the address of the LD instruction; this forms the effective address. Before the addition, the 3 lower bits of the instruction address are cleared. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

A PC-relative, extended LD may not be placed in the delay slot of a jump instruction.

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```
vAddr ← (PCGPRLEN-1..3 || 03) + sign_extend(offset)
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
memdoubleword ← LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[Xlat(ry)] ← memdoubleword
```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

Programming Note

For the purposes of watchpoints (provided by the CP0 *WatchHi* and *WatchLo* registers) and EJTAG breakpoints, the PC-relative reference is considered to be a data, rather than an instruction reference. That is, the watchpoint or breakpoint is triggered only if enabled for data references.

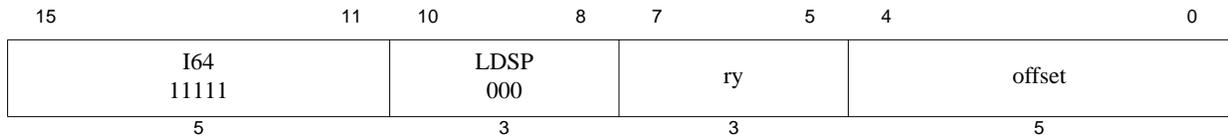

Format: LD *ry*, *offset*(*sp*)

MIPS16e (64-bit only)

Purpose: Load Doubleword (SP-Relative)

To load a doubleword from memory.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[sp] + \text{offset}]$

The 5-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, then added to the contents of GPR 29 to form the effective address. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:


The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```
vAddr ← zero_extend(offset || 03) + GPR[29]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
memdoubleword ← LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[Xlat(ry)] ← memdoubleword
```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

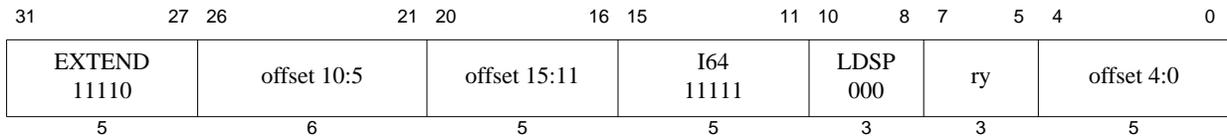

Format: LD *ry*, offset(*sp*)

MIPS16e (64-bit only)

Purpose: Load Doubleword (SP-Relative, Extended)

To load an SP-relative doubleword from memory.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[sp] + \text{offset}]$

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR 29 to form the effective address. The contents of the 64-bit doubleword at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[29]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
memdoubleword ← LoadMemory (CCA, DOUBLEWORD, pAddr, vAddr, DATA)
GPR[Xlat(ry)] ← memdoubleword

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

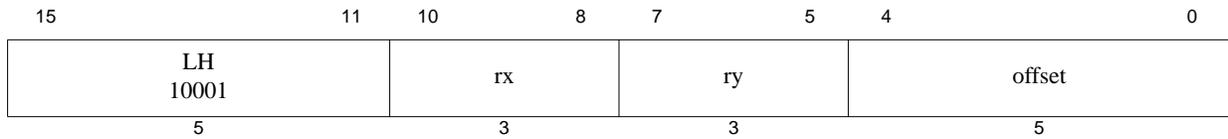

Format: LH *ry*, offset(*rx*)

MIPS16e

Purpose: Load Halfword

To load a halfword from memory as a signed value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is shifted left 1 bit, zero-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the halfword at the memory location specified by the effective address are sign-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 0) + GPR[Xlat(rx)]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory(CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[Xlat(ry)] ← sign_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

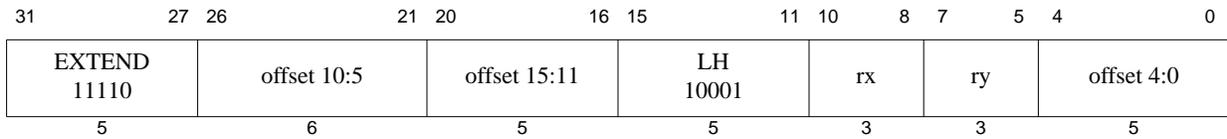

Format: LH *ry*, offset(*rx*)

MIPS16e

Purpose: Load Halfword (Extended)

To load a halfword from memory as a signed value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The contents of the halfword at the memory location specified by the effective address are sign-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory(CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[Xlat(ry)] ← sign_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

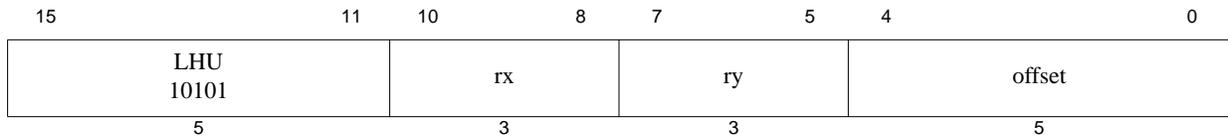

Format: LHU *ry*, offset(*rx*)

MIPS16e

Purpose: Load Halfword Unsigned

To load a halfword from memory as an unsigned value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is shifted left 1 bit, zero-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the halfword at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 0) + GPR[Xlat(rx)]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory(CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[Xlat(ry)] ← zero_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

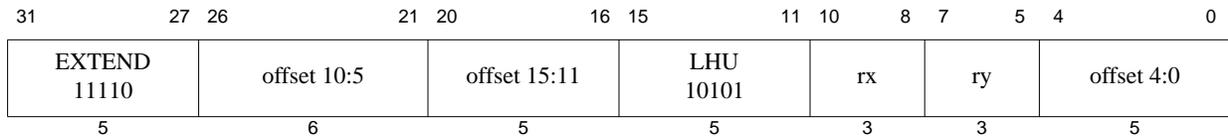

Format: LHU *ry*, offset(*rx*)

MIPS16e

Purpose: Load Halfword Unsigned (Extended)

To load a halfword from memory as an unsigned value.

Description: $GPR[ry] \leftarrow memory[GPR[rx] + offset]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The contents of the halfword at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian2 || 0))
memdoubleword ← LoadMemory(CCA, HALFWORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU2 || 0)
GPR[Xlat(ry)] ← zero_extend(memdoubleword15+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

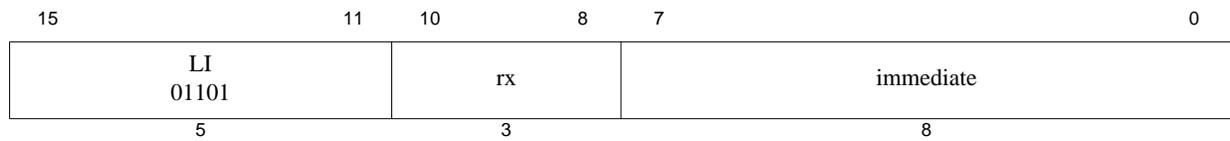

Format: LI *rx*, *immediate*

MIPS16e

Purpose: Load Immediate

To load a constant into a GPR.

Description: $GPR[rx] \leftarrow \text{immediate}$

The 8-bit *immediate* is zero-extended and then loaded into GPR *rx*.

Restrictions:


None

Operation:

$GPR[Xlat(rx)] \leftarrow \text{zero_extend(immediate)}$

Exceptions:

None

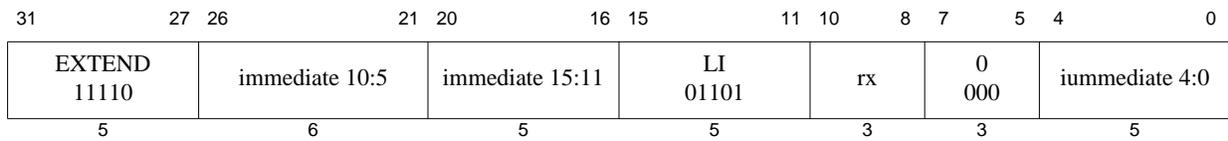

Format: LI *rx*, *immediate*

MIPS16e

Purpose: Load Immediate (Extended)

To load a constant into a GPR.

Description: $GPR[rx] \leftarrow immediate$

The 16-bit *immediate* is zero-extended and then loaded into GPR *rx*.

Restrictions:


None

Operation:

$GPR[Xlat(rx)] \leftarrow zero_extend(immediate)$

Exceptions:

None

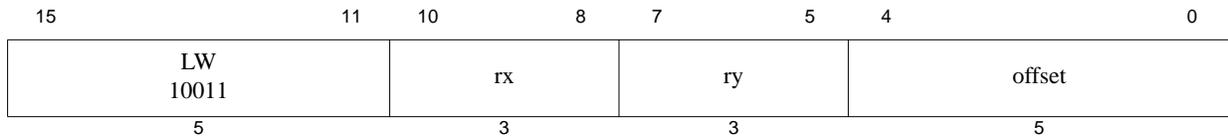

Format: LW *ry*, offset(*rx*)

MIPS16e

Purpose: Load Word

To load a word from memory as a signed value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is shifted left 2 bits, zero-extended, then added to the contents of GPR *rx* to form the effective address. The contents of the word at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 02) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

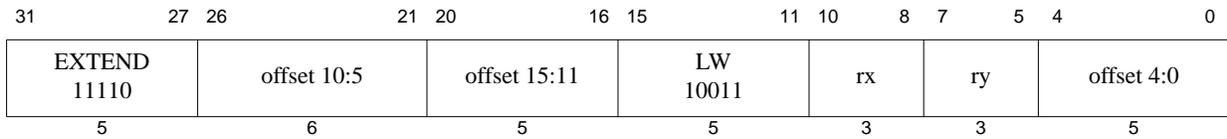

Format: `LW ry, offset(rx)`

MIPS16e

Purpose: Load Word (Extended)

To load a word from memory as a signed value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The contents of the word at the memory location specified by the effective address are loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

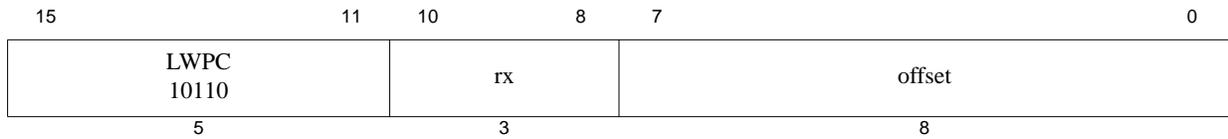

Format: LW rx, offset(pc)

MIPS16e

Purpose: Load Word (PC-Relative)

To load a PC-relative word from memory as a signed value.

Description: $GPR[rx] \leftarrow memory[PC + offset]$

The 8-bit *offset* is shifted left 2 bits, zero-extended, and added either to the address of the LW instruction or to the address of the jump instruction in whose delay slot the LW is executed. The 2 lower bits of this result are cleared to form the effective address. The contents of the 32-bit word at the memory location specified by the effective address are loaded into GPR *rx*.

Restrictions:

None

Operation:

```

I-1:  base_pc ← PC
I:    if not (JumpDelaySlot(PC)) then
          base_pc ← PC
        endif
        vAddr ← (base_pcGPRELEN-1..2 + zero_extend(offset)) || 02
        (pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
        pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
        memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
        byte ← vAddr2..0 xor (BigEndianCPU || 02)
        GPR[Xlat(rx)] ← sign_extend(memdoubleword31+8*byte..8*byte)


```

Exceptions:

TLB Refill, TLB Invalid, Bus Error

Programming Note

For the purposes of watchpoints (provided by the CP0 *WatchHi* and *WatchLo* registers) and EJTAG breakpoints, the PC-relative reference is considered to be a data, rather than an instruction reference. That is, the watchpoint or breakpoint is triggered only if enabled for data references.

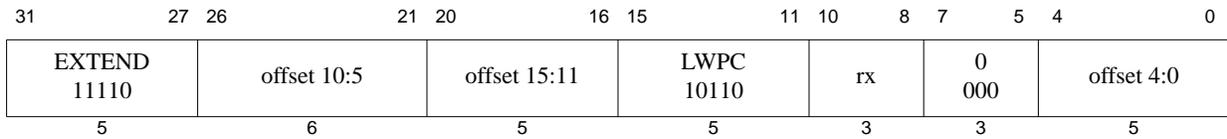

Format: LW *rx*, *offset*(*pc*)

MIPS16e

Purpose: Load Word (PC-Relative, Extended)

To load a PC-relative word from memory as a signed value.

Description: $GPR[rx] \leftarrow memory[PC + offset]$

The 16-bit *offset* is sign-extended and added to the address of the LW instruction; this forms the effective address. Before the addition, the 2 lower bits of the instruction address are cleared. The contents of the 32-bit word at the memory location specified by the effective address are loaded into GPR *rx*.

Restrictions:

A PC-relative, extended LW may not be placed in the delay slot of a jump instruction.

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:

```

vAddr ← (PCGPRLEN-1..2 || 02) + sign_extend(offset)
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(rx)] ← sign_extend(memdoubleword31+8*byte..8*byte)


```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

Programming Note

For the purposes of watchpoints (provided by the CP0 *WatchHi* and *WatchLo* registers) and EJTAG breakpoints, the PC-relative reference is considered to be a data, rather than an instruction reference. That is, the watchpoint or breakpoint is triggered only if enabled for data references.

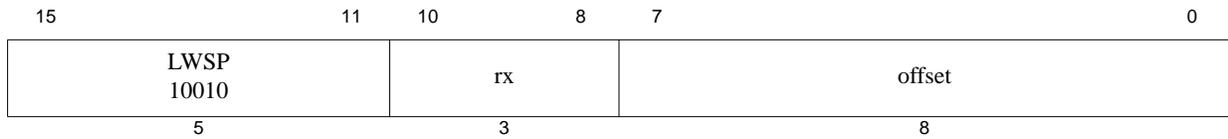

Format: LW rx, offset(sp)

MIPS16e

Purpose: Load Word (SP-Relative)

To load an SP-relative word from memory as a signed value.

Description: $GPR[rx] \leftarrow memory[GPR[sp] + offset]$

The 8-bit *offset* is shifted left 2 bits, zero-extended, then added to the contents of GPR 29 to form the effective address. The contents of the word at the memory location specified by the effective address are loaded into GPR *rx*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 02) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

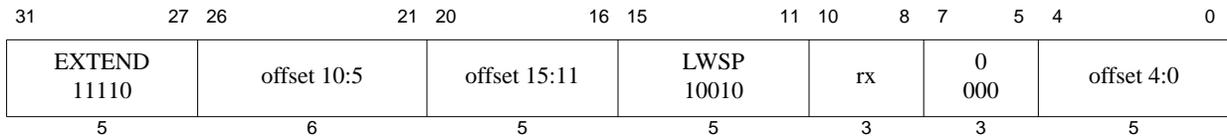

Format: LW rx, offset(sp)

MIPS16e

Purpose: Load Word (SP-Relative, Extended)

To load an SP-relative word from memory as a signed value.

Description: $GPR[rx] \leftarrow memory[GPR[sp] + offset]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR 29 to form the effective address. The contents of the word at the memory location specified by the effective address are loaded into GPR *rx*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← sign_extend(memdoubleword31+8*byte..8*byte)

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error

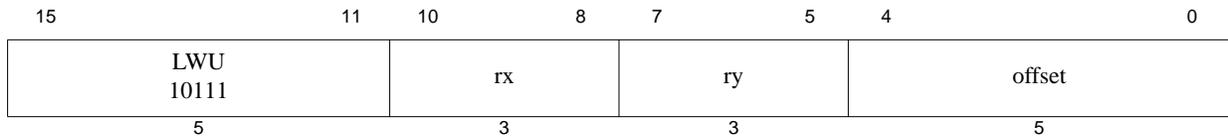

Format: LWU *ry*, offset(*rx*)

MIPS16e (64-bit only)

Purpose: Load Word Unsigned

To load a word from memory as an unsigned value.

Description: $GPR[ry] \leftarrow \text{memory}[GPR[rx] + \text{offset}]$

The 5-bit *offset* is shifted left 2 bits, zero-extended to 64 bits, then added to the contents of GPR *rx* to form the effective address. The contents of the word at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If either of the two least-significant bits of the address are non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 02) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← 032 || memdoubleword31+8*byte..8*byte

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

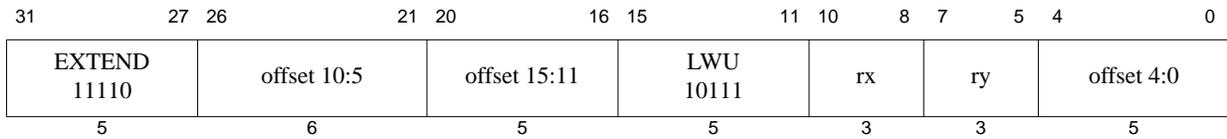

Format: LWU *ry*, offset(*rx*)

MIPS16e (64-bit only)

Purpose: Load Word Unsigned (Extended)

To load a word from memory as an unsigned value.

Description: $GPR[ry] \leftarrow memory[GPR[rx] + offset]$

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR *rx* to form the effective address. The contents of the word at the memory location specified by the effective address are zero-extended and loaded into GPR *ry*.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, LOAD)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
memdoubleword ← LoadMemory (CCA, WORD, pAddr, vAddr, DATA)
byte ← vAddr2..0 xor (BigEndianCPU || 02)
GPR[Xlat(ry)] ← 032 || memdoubleword31+8*byte..8*byte

```

Exceptions:

TLB Refill, TLB Invalid, Bus Error, Address Error, Reserved Instruction

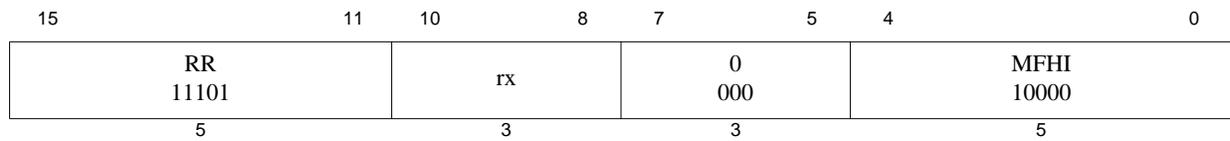

Format: MFHI rx

MIPS16e

Purpose: Move From HI Register

To copy the special purpose *HI* register to a GPR.

Description: $GPR[rx] \leftarrow HI$

The contents of special register *HI* are loaded into GPR *rx*.

Restrictions:

None

Operation:


$GPR[Xlat(rx)] \leftarrow HI$

Exceptions:

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFHI must not modify the *HI* register. If this restriction is violated, the result of the MFHI is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

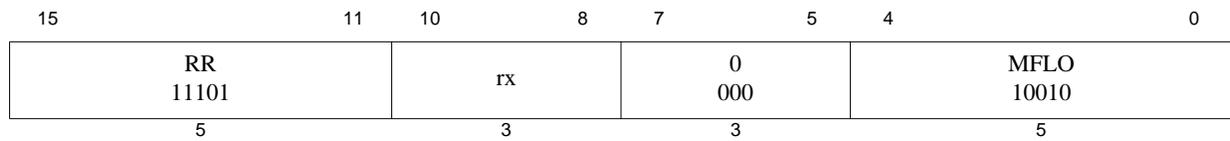

Format: MFLO rx

MIPS16e

Purpose: Move From LO Register

To copy the special purpose *LO* register to a GPR.

Description: $GPR[rx] \leftarrow LO$

The contents of special register *LO* are loaded into GPR *rx*.

Restrictions:

None

Operation:


$GPR[Xlat(rx)] \leftarrow LO$

Exceptions:

None

Historical Information:

In the MIPS I, II, and III architectures, the two instructions which follow the MFHI must not modify the *HI* register. If this restriction is violated, the result of the MFHI is **UNPREDICTABLE**. This restriction was removed in MIPS IV and MIPS32, and all subsequent levels of the architecture.

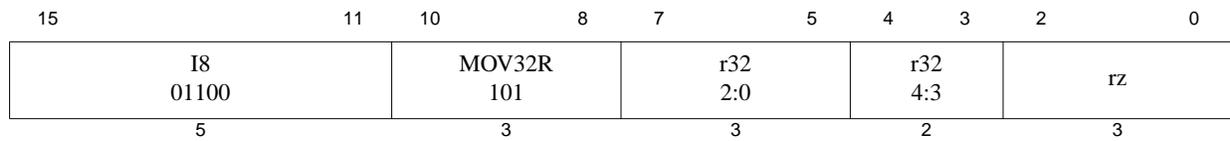

Format: MOVE r32, rz

MIPS16e

Purpose: Move

To move the contents of a GPR to a GPR.

Description: $GPR[r32] \leftarrow GPR[rz]$

The contents of GPR *rz* are moved into GPR *r32*, and *r32* can specify any one of the 32 GPRs.

Restrictions:

None

Operation:


$GPR[r32] \leftarrow GPR[Xlat(rz)]$

Exceptions:

None

Programming Notes:

The instruction word of 0x6500 (move \$0,\$16), expressed as NOP, is the assembly idiom used to denote no operation.

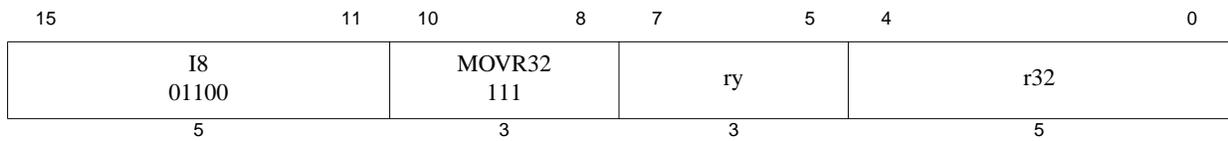

Format: MOVE *ry*, *r32*

MIPS16e

Purpose: Move

To move the contents of a GPR to a GPR.

Description: $GPR[ry] \leftarrow GPR[r32]$

The contents of GPR *r32* are moved into GPR *ry*, and *r32* can specify any one of the 32 GPRs.

Restrictions:


None

Operation:

$$GPR[Xlat(ry)] \leftarrow GPR[r32]$$

Exceptions:

None

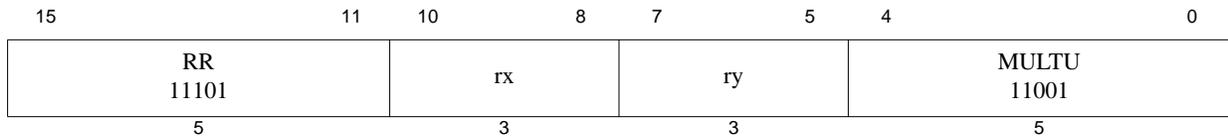

Format: MULTU *rx*, *ry*

MIPS16e

Purpose: Multiply Unsigned Word

To multiply 32-bit unsigned integers.

Description: $(LO, HI) \leftarrow GPR[rx] \times GPR[ry]$

The 32-bit word value in GPR *rx* is multiplied by the 32-bit value in GPR *ry*, treating both operands as unsigned values, to produce a 64-bit result. The low-order 32-bit word of the result is sign-extended and placed into special register *LO*, and the high-order 32-bit word is sign-extended and placed into special register *HI*.

No arithmetic exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if either GPR *rt* or GPR *rs* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[rs]) or NotWordValue(GPR[rt]) then
    UndefinedResult()
endif
prod ← (0 || GPR[Xlat(rx)]) * (0 || GPR[Xlat(ry)])
LO ← sign_extend(prod31..0)
HI ← sign_extend(prod63..32)

```

Exceptions:

None

Programming Notes:

In some processors the integer multiply operation may proceed asynchronously and allow other CPU instructions to execute before it is complete. An attempt to read *LO* or *HI* before the results are written interlocks until the results are ready. Asynchronous execution does not affect the program result, but offers an opportunity for performance improvement by scheduling the multiply so that other instructions can execute in parallel.

Programs that require overflow detection must check for it explicitly.

Where the size of the operands are known, software should place the shorter operand in GPR *rt*. This may reduce the latency of the instruction on those processors which implement data-dependent instruction latencies.

15	11	10	8	7	5	4	3	2	0
I8 01100	MOV32R 101			0 000	0 00	0 000			
5	3			3	2		3		

Format: NOP

MIPS16e Assembly Idiom

Purpose: No Operation

To perform no operation.

Description:

NOP is the assembly idiom used to denote no operation. The actual instruction is interpreted by the hardware as `MOVE $0, $16`.

Restrictions:

None

Operation:


None

Exceptions:

None

Programming Notes:

The 0x6500 instruction word, which represents `MOVE $0, $16`, is the preferred NOP for software to use to fill jump delay slots and to pad out alignment sequences.

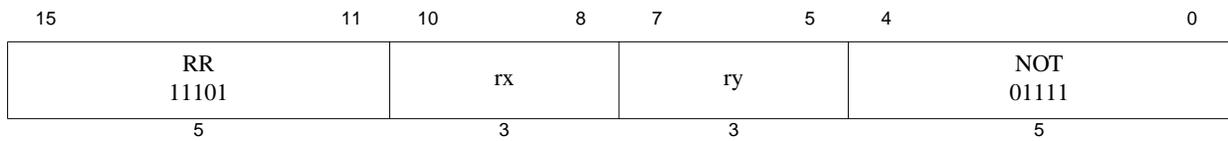

Format: NOT *rx*, *ry*

MIPS16e

Purpose: Not

To complement an integer value

Description: $GPR[rx] \leftarrow (\text{NOT } GPR[ry])$

The contents of GPR *ry* are bitwise-inverted and placed in GPR *rx*.

Restrictions:


None

Operation:

$$GPR[Xlat(rx)] \leftarrow (\text{not } GPR[Xlat(ry)])$$

Exceptions:

None

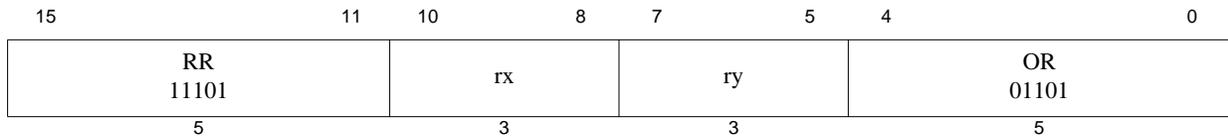

Format: OR *rx*, *ry*

MIPS16e

Purpose: Or

To do a bitwise logical OR.

Description: $GPR[rx] \leftarrow GPR[rx] \text{ OR } GPR[ry]$

The contents of GPR *ry* are combined with the contents of GPR *rx* in a bitwise logical OR operation. The result is placed in GPR *rx*.

Restrictions:


None

Operation:

$GPR[Xlat(rx)] \leftarrow GPR[Xlat(rx)] \text{ or } GPR[Xlat(ry)]$

Exceptions:

None

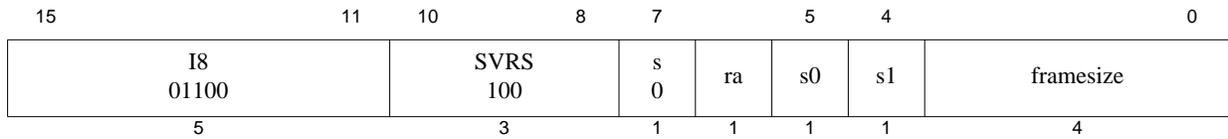

Format: RESTORE {ra,}{s0/s1/s0-1,}{framesize} (All args are optional)

MIPS16e

Purpose: Restore Registers and Deallocate Stack Frame

To deallocate a stack frame before exit from a subroutine, restoring return address and static registers, and adjusting stack

Description: GPR[ra] ← Stack and/or GPR[17]← Stack and/or GPR[16]← Stack,
sp ← sp + (framesize*8)

Restore the *ra* and/or GPR 16 and/or GPR 17 (*s0* and *s1* in the MIPS ABI calling convention) registers from the stack if the corresponding *ra*, *s0*, or *s1* bits of the instruction are set, and adjust the stack pointer by 8 times the *framesize* value. Registers are loaded from the stack assuming higher numbered registers are stored at higher stack addresses. A *framesize* value of 0 is interpreted as a stack adjustment of 128. On a MIPS64 implementation, words are loaded from the stack, sign-extended and loaded into the corresponding GPR, using the equivalent of load word.

The opcode and function field describe a general save/restore operation, with the *s* fields as a variables. The individual instructions, RESTORE and SAVE have specific values for this variable.

Restrictions:

If either of the 2 least-significant bits of the stack pointer are not zero, and any of the *ra*, *s0*, or *s1* bits are set, then an Address Error exception will occur.

Operation:

```

if framesize = 0 then
    temp ← GPR[29] + 128
else
    temp ← GPR[29] + (0 || (framesize << 3))
endif
temp2 ← temp
if ra = 1 then
    temp ← temp - 4
    GPR[31] ← LoadStackWord(temp)
endif
if s1 = 1 then
    temp ← temp - 4
    GPR[17] ← LoadStackWord(temp)
endif
if s0 = 1 then
    temp ← temp - 4
    GPR[16] ← LoadStackWord(temp)
endif
GPR[29] ← temp2

LoadStackWord(vaddr)
    if vAddr1..0 ≠ 02 then
        SignalException(AddressError)
    endif
    (pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)

```


```
byte ← vAddr2..0 xor (BigEndianCPU || 02)  
LoadStackWord ← sign_extend(memdoubleword31+8*byte..8*byte)  
enfunction LoadStackWord
```

Exceptions:

TLB refill, TLB invalid, Address error, Bus Error

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of loads from memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

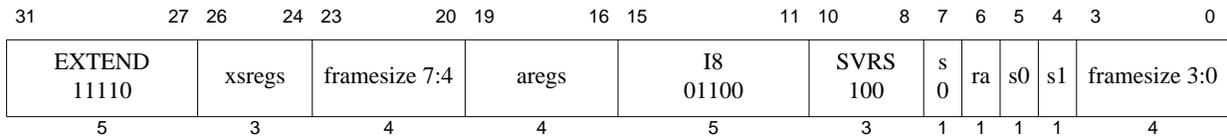

Format: RESTORE {ra,}{xsregs,}{aregs,}{framesize}(All arguments optional) **MIPS16e**

Purpose: Restore Registers and Deallocate Stack Frame (Extended)

To deallocate a stack frame before exit from a subroutine, restoring return address and static registers from an extended static register set, and adjusting the stack

Description: GPR[ra] ← **Stack** and/or GPR[18-23,30] ← **Stack** and/or GPR[17] ← **Stack**
and/or GPR[16] ← **Stack** and/or GPR[4-7] ← **Stack**, sp ← sp + (framesize * 8)

Restore the *ra* register from the stack if the *ra* bit is set in the instruction. Restore from the stack the number of registers in the set GPR[18-23,30] indicated by the value of the *xsregs* field. Restore from the stack GPR 16 and/or GPR 17 (*s0* and *s1* in the MIPS ABI calling convention) from the stack if the corresponding *s0* and *s1* bits of the instruction are set, restore from the stack the number of registers in the range GPR[4-7] indicated by the *aregs* field, and adjust the stack pointer by 8 times the 8-bit concatenated *framesize* value. Registers are loaded from the stack assuming higher numbered registers are stored at higher stack addresses. On a MIPS64 implementation, words are loaded from the stack, sign-extended and loaded into the corresponding GPR, using the equivalent of load word.

Interpretation of the *aregs* Field

In the standard MIPS ABIs, GPR[4-7] are designated as argument passing registers, *a0-a3*. When they are so used, they must be saved on the stack at locations allocated by the caller of the routine being entered, but need not be restored on subroutine exit. In other MIPS16e calling sequences, however, it is possible that some of the registers GPR[4-7] need to be saved as static registers on the local stack instead of on the caller stack, and restored before return from the subroutine. The encoding used for the *aregs* field of an extended RESTORE instruction is the same as that used for the extended SAVE, but since argument registers can be ignored for the purposes of a RESTORE, only the registers treated as static need be handled. The following table shows the RESTORE encoding of the *aregs* field.

<i>aregs</i> Encoding (binary)	Registers Restored as Static Registers
0 0 0 0	None
0 0 0 1	GPR[7]
0 0 1 0	GPR[6], GPR[7]
0 0 1 1	GPR[5], GPR[6], GPR[7]
0 1 0 0	None
0 1 0 1	GPR[7]
0 1 1 0	GPR[6], GPR[7]
0 1 1 1	GPR[5], GPR[6], GPR[7]
1 0 0 0	None
1 0 0 1	GPR[7]
1 0 1 0	GPR[6], GPR[7]

args Encoding (binary)	Registers Restored as Static Registers
1 0 1 1	GPR[4], GPR[5], GPR[6], GPR[7]
1 1 0 0	None
1 1 0 1	GPR[7]
1 1 1 0	None
1 1 1 1	Reserved

Restrictions:

If either of the 2 least-significant bits of the stack pointer are not zero, and any of the *ra*, *s0*, *s1*, or *xsregs* fields are non-zero or the *args* field contains an encoding that implies a register load, then an Address Error exception will occur.

Operation:

```

temp ← GPR[29] + (0 || (framesize << 3))
temp2 ← temp
if ra = 1 then
    temp ← temp - 4
    GPR[31] ← LoadStackWord(temp)
endif
if xsregs > 0 then
    if xsregs > 1 then
        if xsregs > 2 then
            if xsregs > 3 then
                if xsregs > 4 then
                    if xsregs > 5 then
                        if xsregs > 6 then
                            temp ← temp - 4
                            GPR[30] ← LoadStackWord(temp)
                        endif
                    endif
                endif
            endif
        endif
    endif
    temp ← temp - 4
    GPR[23] ← LoadStackWord(temp)
endif
    temp ← temp - 4
    GPR[22] ← LoadStackWord(temp)
endif
    temp ← temp - 4
    GPR[21] ← LoadStackWord(temp)
endif
    temp ← temp - 4
    GPR[20] ← LoadStackWord(temp)
endif
    temp ← temp - 4
    GPR[19] ← LoadStackWord(temp)
endif
    temp ← temp - 4
    GPR[18] ← LoadStackWord(temp)
endif
if s1 = 1 then
    temp ← temp - 4
    GPR[17] ← LoadStackWord(temp)
endif

```

```

endif
if s0 = 1 then
    temp ← temp - 4
    GPR[16] ← LoadStackWord(temp)
endif
case aregs of
    0b0000 0b0100 0b1000 0b1100 0b1110: astatic ← 0
    0b0001 0b0101 0b1001 0b1101: astatic ← 1
    0b0010 0b0110 0b1010: astatic ← 2
    0b0011 0b0111: astatic ← 3
    0b1011: astatic ← 4
    otherwise: UNPREDICTABLE
endcase

if astatic > 0 then
    temp ← temp - 4
    GPR[7] ← LoadStackWord(temp)
    if astatic > 1 then
        temp ← temp - 4
        GPR[6] ← LoadStackWord(temp)
        if astatic > 2 then
            temp ← temp - 4
            GPR[5] ← LoadStackWord(temp)
            if astatic > 3 then
                temp ← temp - 4
                GPR[4] ← LoadStackWord(temp)
            endif
        endif
    endif
endif
endif
GPR[29] ← temp2

LoadStackWord(vaddr)
    if vAddr1..0 ≠ 02 then
        SignalException(AddressError)
    endif
    (pAddr, CCA) ← AddressTranslation(vAddr, DATA, LOAD)
    pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
    memdoubleword ← LoadMemory(CCA, WORD, pAddr, vAddr, DATA)
    byte ← vAddr2..0 xor (BigEndianCPU || 02)
    LoadStackWord ← sign_extend(memdoubleword31+8*byte..8*byte)
endfunction LoadStackWord

```


Exceptions:

TLB refill, TLB invalid, Address error, Bus Error

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of loads from memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

Behavior of the processor is **UNPREDICTABLE** for Reserved values of *aregs*.

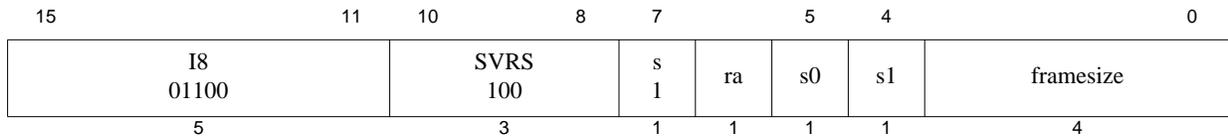

Format: SAVE {ra,}{s0/s1/s0-1,}{framesize} (All arguments are optional)

MIPS16e

Purpose: Save Registers and Set Up Stack Frame

To set up a stack frame on entry to a subroutine, saving return address and static registers, and adjusting stack

Description: **stack** ← GPR[ra] and/or **Stack** ← GPR[17] and/or **Stack** ← GPR[16],
sp ← sp - (framesize * 8)

Save the *ra* and/or GPR 16 and/or GPR 17 (*s0* and *s1* in the MIPS ABI calling convention) on the stack if the corresponding *ra*, *s0*, and *s1* bits of the instruction are set, and adjust the stack pointer by 8 times the *framesize* value. Registers are stored with higher numbered registers at higher stack addresses. A *framesize* value of 0 is interpreted as a stack adjustment of 128. On a MIPS64 implementation, only the lower 32 bits of each GPR are saved, using the equivalent of store word.

The opcode and function field describe a general save/restore operation, with the *s* fields as a variables. The individual instructions, RESTORE and SAVE have specific values for this variable.

Restrictions:

If either of the 2 least-significant bits of the stack pointer are not zero, and any of the *ra*, *s0*, or *s1* bits are set, then an Address Error exception will occur.

Operation:

```

temp ← GPR[29]
if ra = 1 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[31])
endif
if s1 = 1 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[17])
endif
if s0 = 1 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[16])
endif
if framesize = 0 then
    temp ← GPR[29] - 128
else
    temp ← GPR[29] - (0 || (framesize << 3))
endif
GPR[29] ← temp

StoreStackWord(vaddr, value)
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← value63-8*bytesel..0 || 08*bytesel

```


```
    StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
endfunction StoreStackWord
```

Exceptions:

TLB refill, TLB invalid, TLB modified, Address error, Bus Error

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of stores to memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

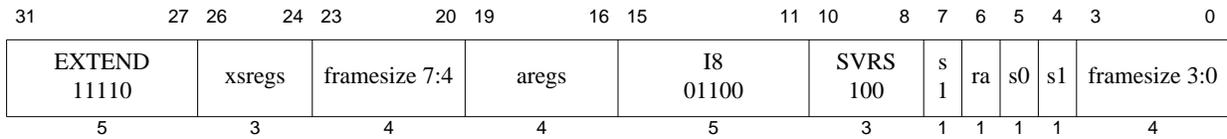

Format: SAVE {ra,}{xsregs,}{aregs,}{framesize} (All arguments optional)

MIPS16e

Purpose: Save Registers and Set Up Stack Frame (Extended)

To set up a stack frame on entry to a subroutine, saving return address, static, and argument registers, and adjusting the stack

Description: **stack** ← GPR[ra] and/or **stack** ← GPR[18-23,30] and/or **stack** ← GPR[17] and/or **stack** ← GPR[16] and/or **stack** ← GPR[4-7], $sp \leftarrow sp - (\text{framesize} * 8)$

Save registers GPR[4-7] specified to be treated as incoming arguments by the *aregs* field. Save the *ra* register on the stack if the *ra* bit of the instruction is set. Save the number of registers in the set GPR[18-23, 30] indicated by the value of the *xsregs* field, and/or GPR 16 and/or GPR 17 (*s0* and *s1* in the MIPS ABI calling convention) on the stack if the corresponding *s0* and *s1* bits of the instruction are set. Save the number of registers in the range GPR[4-7] that are to be treated as static registers as indicated by the *aregs* field, and adjust the stack pointer by 8 times the 8-bit concatenated *framesize* value. Registers are stored with higher numbered registers at higher stack addresses. On a MIPS64 implementation, only the lower 32 bits of each GPR are saved, using the equivalent of store word.

Interpretation of the *aregs* Field

In the standard MIPS ABIs, GPR[4-7] are designated as argument passing registers, *a0-a3*. When they are so used, they must be saved on the stack at locations allocated by the caller of the routine being entered. In other MIPS16e calling sequences, however, it is possible that some of the registers GPR[4-7] will need to be saved as static registers on the local stack instead of on the caller stack. The encoding of the *aregs* field allows for 0-4 arguments, 0-4 statics, and for mixtures of the two. Registers are bound to arguments in ascending order, *a0*, *a1*, *a2*, and *a3*, and thus assigned to static values in the reverse order, GPR[7], GPR[6], GPR[5], and GPR[4]. The following table shows the encoding of the *aregs* field.

<i>aregs</i> Encoding (binary)	Registers Saved as Arguments	Registers Saved as Static Registers
0 0 0 0	None	None
0 0 0 1	None	GPR[7]
0 0 1 0	None	GPR[6], GPR[7]
0 0 1 1	None	GPR[5], GPR[6], GPR[7]
0 1 0 0	a0	None
0 1 0 1	a0	GPR[7]
0 1 1 0	a0	GPR[6], GPR[7]
0 1 1 1	a0	GPR[5], GPR[6], GPR[7]
1 0 0 0	a0, a1	None
1 0 0 1	a0, a1	GPR[7]
1 0 1 0	a0, a1	GPR[6], GPR[7]

<i>args</i> Encoding (binary)	Registers Saved as Arguments	Registers Saved as Static Registers
1 0 1 1	None	GPR[4], GPR[5], GPR[6], GPR[7]
1 1 0 0	a0, a1, a2	None
1 1 0 1	a0, a1, a2	GPR[7]
1 1 1 0	a0, a1, a2, a3	None
1 1 1 1	Reserved	Reserved

Restrictions:

If either of the 2 least-significant bits of the stack pointer are not zero, and any of the *ra*, *s0*, *s1*, or *xsregs* fields are non-zero or the *args* field contains an value that implies a register store, then an Address Error exception will occur.

Operation:

```

temp ← GPR[29]
temp2 ← GPR[29]
case args of
  0b0000 0b0001 0b0010 0b0011 0b1011: args ← 0
  0b0100 0b0101 0b0110 0b0111: args ← 1
  0b1000 0b1001 0b1010: args ← 2
  0b1100 0b1101: args ← 3
  0b1110: args ← 4
  otherwise: UNPREDICTABLE
endcase
if args > 0 then
  StoreStackWord(temp, GPR[4])
  if args > 1 then
    StoreStackWord(temp + 4, GPR[5])
    if args > 2 then
      StoreStackWord(temp + 8, GPR[6])
      if args > 3 then
        StoreStackWord(temp + 12, GPR[7])
      endif
    endif
  endif
endif
if ra = 1 then
  temp ← temp - 4
  StoreStackWord(temp, GPR[31])
endif
if xsregs > 0 then
  if xsregs > 1 then
    if xsregs > 2 then
      if xsregs > 3 then
        if xsregs > 4 then
          if xsregs > 5 then
            if xsregs > 6 then
              temp ← temp - 4
              StoreStackWord(temp, GPR[30])
            endif
          endif
          temp ← temp - 4
          StoreStackWord(temp, GPR[23])
        endif
      endif
    endif
  endif
endif

```

```

        endif
        temp ← temp - 4
        StoreStackWord(temp, GPR[22])
    endif
    temp ← temp - 4
    StoreStackWord(temp, GPR[21])
endif
temp ← temp - 4
StoreStackWord(temp, GPR[20])
endif
temp ← temp - 4
StoreStackWord(temp, GPR[19])
endif
temp ← temp - 4
StoreStackWord(temp, GPR[18])
endif
if s1 = 1 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[17])
endif
if s0 = 1 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[16])
endif
case aregs of
    0b0000 0b0100 0b1000 0b1100 0b1110: astatic ← 0
    0b0001 0b0101 0b1001 0b1101: astatic ← 1
    0b0010 0b0110 0b1010: astatic ← 2
    0b0011 0b0111: astatic ← 3
    0b1011: astatic ← 4
    otherwise: UNPREDICTABLE
endcase
if astatic > 0 then
    temp ← temp - 4
    StoreStackWord(temp, GPR[7])
    if astatic > 1 then
        temp ← temp - 4
        StoreStackWord(temp, GPR[6])
        if astatic > 2 then
            temp ← temp - 4
            StoreStackWord(temp, GPR[5])
            if astatic > 3 then
                temp ← temp - 4
                StoreStackWord(temp, GPR[4])
            endif
        endif
    endif
endif
temp ← temp2 - (0 || (framesize << 3))
GPR[29] ← temp

StoreStackWord(vaddr, value)
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))

```

```
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← value63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)
endfunction StoreStackWord
```


Exceptions:

TLB refill, TLB invalid, TLB modified, Address error, Bus Error

Programming Notes:

This instruction executes for a variable number of cycles and performs a variable number of stores to memory. A full restart of the sequence of operations will be performed on return from any exception taken during execution.

Behavior of the processor is **UNPREDICTABLE** for Reserved values of *aregs*.

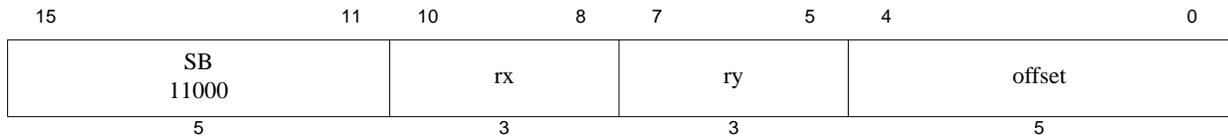

Format: SB *ry*, offset(*rx*)

MIPS16e

Purpose: Store Byte

To store a byte to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 5-bit *offset* is zero-extended, then added to the contents of GPR *rx* to form the effective address. The least-significant byte of GPR *ry* is stored at the effective address.

Restrictions:

None

Operation:


```

vAddr ← zero_extend(offset) + GPR[Xlat(rx)]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddr_PSIZE-1..3 || (pAddr_2..0 xor ReverseEndian3)
bytesel ← vAddr_2..0 xor BigEndianCPU3
datadoubleword ← GPR[rt]_63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, BYTE, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

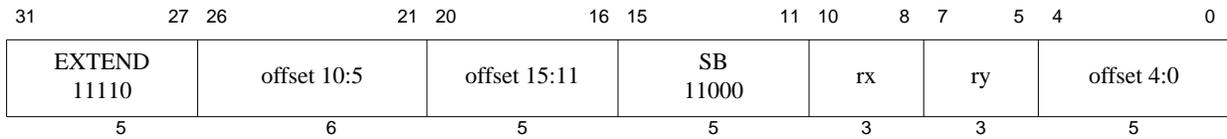

Format: SB *ry*, offset(*rx*)

MIPS16e

Purpose: Store Byte (Extended)

To store a byte to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The least-significant byte of GPR *ry* is stored at the effective address.

Restrictions:

None

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor ReverseEndian3)
bytesel ← vAddr2..0 xor BigEndianCPU3
datadoubleword ← GPR[rt]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, BYTE, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

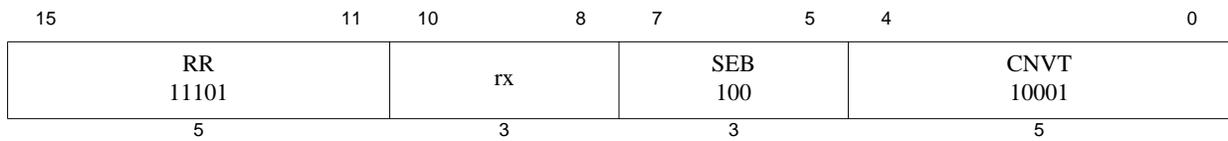

Format: SEB rx

MIPS16e

Purpose: Sign-Extend Byte

Sign-extend least significant byte in register rx.

Description: $GPR[rx] \leftarrow \text{sign_extend}(GPR[rx]7..0)$

The least significant byte of GPR *rx* is sign-extended and the value written back to *rx*.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← sign_extend(temp7..0)


```

Exceptions:

None.

Programming Notes:

None.

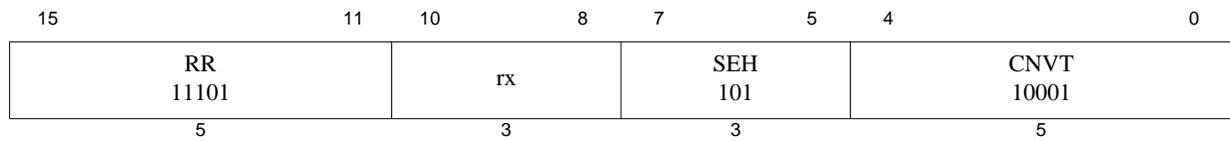

Format: SEH rx

MIPS16e

Purpose: Sign-Extend Halfword

Sign-extend least significant word in register *rx*.

Description: $GPR[rx] \leftarrow \text{sign_extend}(GPR[rx]_{15..0});$

The least significant halfword of GPR *rx* is sign-extended and the value written back to *rx*.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← sign_extend(temp15..0)


```

Exceptions:

None.

Programming Notes:

None.

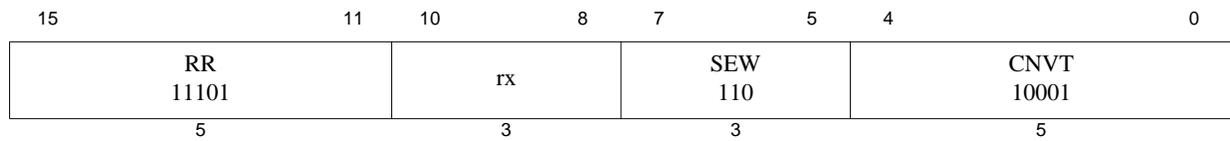

Format: SEW rx

MIPS16e (64-bit only)

Purpose: Sign-Extend Word

Sign-extend least significant word in register rx.

Description: $GPR[rx] \leftarrow \text{sign_extend}(GPR[rx]_{31..0});$

The least significant word of GPR rx is sign-extended and the value written back to rx.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

Reserved Instruction

Programming Notes:

None.

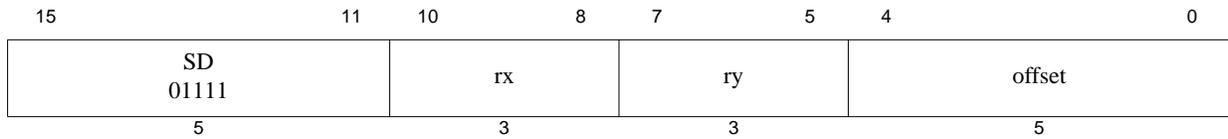

Format: `SD ry, offset(rx)`

MIPS16e (64-bit only)

Purpose: Store Doubleword

To store a doubleword to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 5-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, and then added to the contents of GPR *rx* to form the effective address. The 64-bit contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 03) + GPR[Xlat(rx)]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
datadoubleword ← GPR[Xlat(ry)]
StoreMemory(CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction

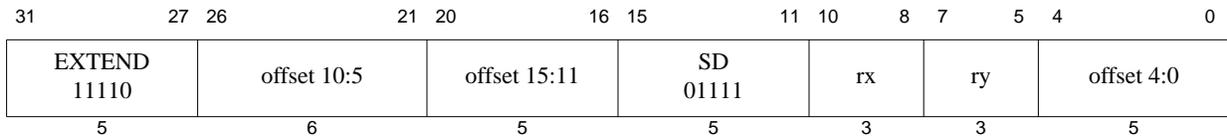

Format: `SD ry, offset(rx)`

MIPS16e (64-bit only)

Purpose: Store Doubleword (Extended)

To store a doubleword to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR *rx* to form the effective address. The 64-bit contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
datadoubleword ← GPR[Xlat(ry)]
StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction

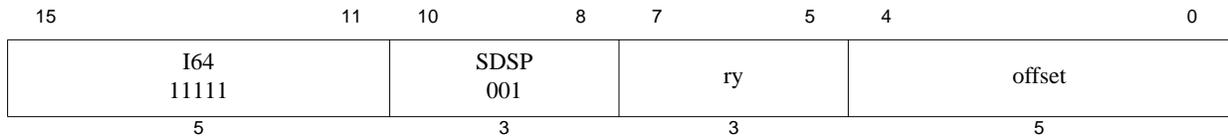

Format: SD *ry*, offset(*sp*)

MIPS16e (64-bit only)

Purpose: Store Doubleword *ry* (SP-Relative)

To store an SP-relative doubleword to memory.

Description: $\text{memory}[\text{GPR}[\text{sp}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 5-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, and then added to the contents of GPR 29 to form the effective address. The 64-bit contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 03) + GPR[29]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
datadoubleword ← GPR[Xlat(ry)]
StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction

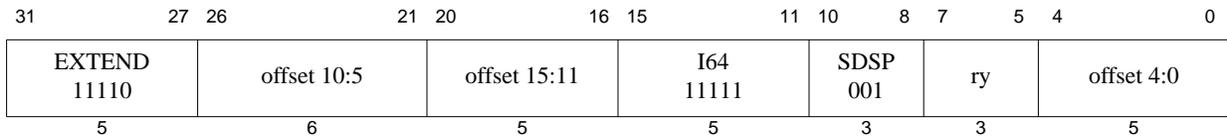

Format: `SP ry, offset(sp)`

MIPS16e (64-bit only)

Purpose: Store Doubleword *ry* (SP-Relative, Extended)

To store an SP-relative doubleword to memory

Description: $\text{memory}[\text{GPR}[\text{sp}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR 29 to form the effective address. The 64-bit contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[29]
if vAddr2..0 ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
datadoubleword ← GPR[Xlat(ry)]
StoreMemory (CCA, DOUBLEWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error, Reserved Instruction

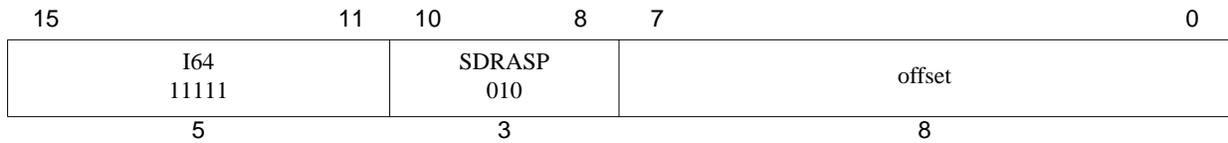

Format: `SD ra, offset(sp)`

MIPS16e (64-bit only)

Purpose: Store Doubleword *ra* (SP-Relative)

To store register *ra* SP-relative to memory.

Description: $\text{memory}[\text{sp} + \text{offset}] \leftarrow \text{ra}$

The 8-bit *offset* is shifted left 3 bits, zero-extended to 64 bits, and then added to the contents of GPR 29 to form the effective address. The 64-bit contents of GPR 31 are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation: 64-bit processors


```

vAddr ← GPR[29] + zero_extend(offset || 03)
if(vAddr2..0) ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, uncached) ← AddressTranslation(vAddr, DATA, STORE)
datadouble ← GPR[31]
StoreMemory(uncached, DOUBLEWORD, datadouble, pAddr, vAddr, DATA)

```

Exceptions:

Address Error, Reserved Instruction

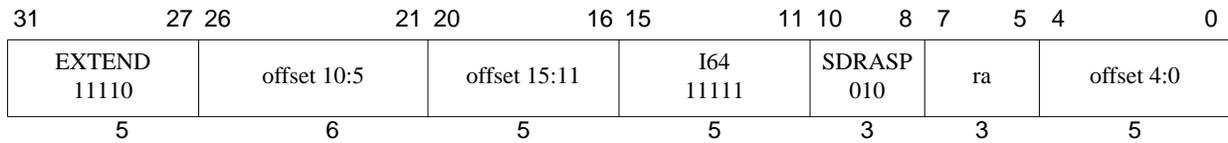

Format: `SD ra, offset(sp)`

MIPS16e (64-bit only)

Purpose: Store Doubleword *ra* (SP-Relative, Extended)

To store register *ra* SP-relative to memory.

Description: `memory[sp + offset] ← ra`

The 16-bit *offset* is sign-extended to 64 bits and then added to the contents of GPR 29 to form the effective address. The 64-bit contents of GPR 31 are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If any of the 3 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation: 64-bit processors


```

vAddr ← GPR[29] + sign_extend(offset)
if(vAddr2..0) ≠ 03 then
    SignalException(AddressError)
endif
(pAddr, uncached) ← AddressTranslation(vAddr, DATA, STORE)
datadouble ← GPR[31]
StoreMemory(uncached, DOUBLEWORD, datadouble, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error, Reserved Instruction

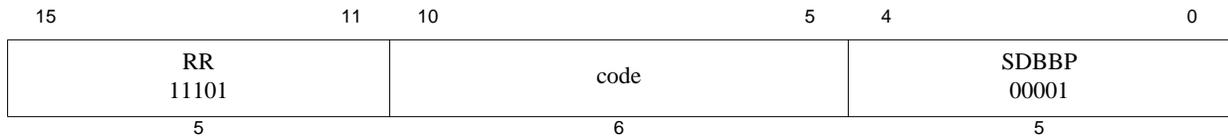

Format: SDBBP code

EJTAG

Purpose: Software Debug Breakpoint

To cause a debug breakpoint exception

Description:

This instruction causes a debug exception, passing control to the debug exception handler. If the processor is executing in Debug Mode when the SDBBP instruction is executed the exception is a Debug Mode Exception, which sets the *Debug*_{DExcCode} field to the value 0x9 (Bp). The *code* field can be used for passing information to the debug exception handler, and is retrieved by the debug exception handler only by loading the contents of the memory word containing the instruction, using the *DEPC* register. The *CODE* field is not used in any way by the hardware.

Restrictions:

Operation:

```


If DebugDM = 0 then
    SignalDebugBreakpointException()
else
    SignalDebugModeBreakpointException()
endif

```

Exceptions:

Debug Breakpoint Exception

Debug Mode Breakpoint Exception

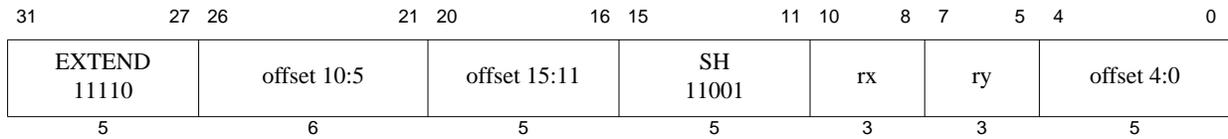

Format: SH *ry*, offset(*rx*)

MIPS16e

Purpose: Store Halfword (Extended)

To store a halfword to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The least-significant halfword of GPR *ry* is stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If the least-significant bit of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr0 ≠ 0 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr12..0 xor (ReverseEndian2 || 0))
bytesel ← vAddr12..0 xor (BigEndianCPU2 || 0)
datadoubleword ← GPR[Xlat(ry)]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, HALFWORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

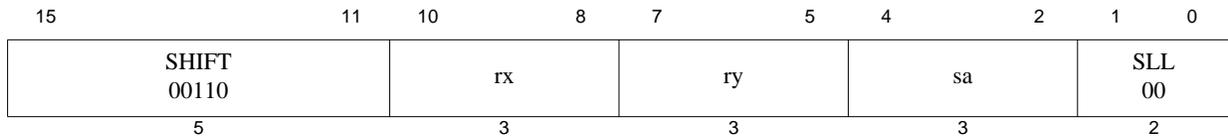

Format: SLL *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Left Logical

To execute a left-shift of a word by a fixed number of bits—1 to 8 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \ll sa$

The 32-bit contents of GPR *ry* are shifted left, and zeros are inserted into the emptied low-order bits. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8. The result is sign-extended and placed into GPR *rx*.

Restrictions:

None

Operation:

```

if sa = 03 then
  s ← 8
else
  s ← 02 || sa
endif
temp ← GPR[Xlat(ry)](31-s)..0 || 0s
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the SLL input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register.

31	27 26	22 21	16 15	11 10	8 7	5 4	2 1 0
EXTEND 11110	sa4:0	0 000000	SHIFT 00110	rx	ry	0 000	SLL 00
5	5	6	5	3	3	3	2

Format: SLL *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Left Logical (Extended)

To execute a left-shift of a word by a fixed number of bits—0 to 31 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \ll sa$

The 32-bit contents of GPR *ry* are shifted left, and zeros are inserted into the emptied low-order bits. The 5-bit *sa* field specifies the shift amount. The result is sign-extended and placed into GPR *rx*.

Restrictions:

None

Operation:

```

s ← sa
temp ← GPR[Xlat(ry)](31-s)..0 || 0s
GPR[Xlat(rx)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the SLL input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register.

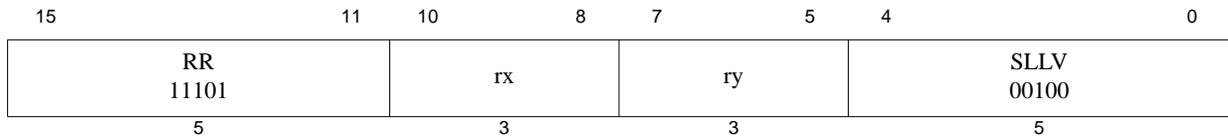

Format: SLLV *ry*, *rx*

MIPS16e

Purpose: Shift Word Left Logical Variable

To execute a left-shift of a word by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \ll GPR[rx]$

The 32-bit contents of GPR *ry* are shifted left, and zeros are inserted into the emptied low-order bits; the result word is sign-extended and placed back in GPR *ry*. The 5 low-order bits of GPR *rx* specify the shift amount.

Restrictions:

None

Operation:

$$s \leftarrow GPR[Xlat(rx)]_{4..0}$$

$$temp \leftarrow GPR[Xlat(ry)]_{(31-s)..0} \parallel 0^s$$


$$GPR[Xlat(ry)] \leftarrow sign_extend(temp_{31..0})$$

Exceptions:

None

Programming Notes:

Unlike nearly all other word operations, the input operand does not have to be a properly sign-extended word value to produce a valid sign-extended 32-bit result. The result word is always sign-extended into a 64-bit destination register; this instruction with a zero shift amount truncates a 64-bit value to 32 bits and sign-extends it.

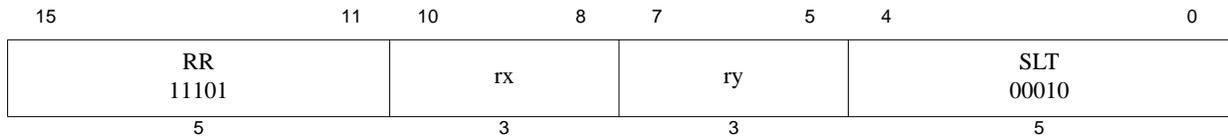

Format: SLT *rx*, *ry*

MIPS16e

Purpose: Set on Less Than

To record the result of a less-than comparison.

Description: $T \leftarrow (GPR[rx] < GPR[ry])$

The contents of GPR *ry* are subtracted from the contents of GPR *rx*. Considering both quantities as signed integers, if the contents of GPR *rx* are less than the contents of GPR *ry*, the result is set to 1 (true); otherwise, the result is set to 0 (false). This result is placed into GPR 24.

Restrictions:

None

Operation:


```

if GPR[Xlat(rx)] < GPR[Xlat(ry)] then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

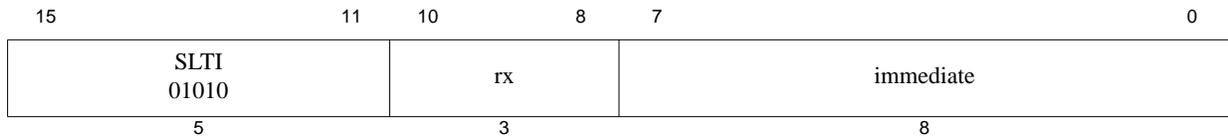

Format: SLTI *rx*, *immediate*

MIPS16e

Purpose: Set on Less Than Immediate

To record the result of a less-than comparison with a constant.

Description: $T \leftarrow (GPR[rx] < immediate)$

The 8-bit *immediate* is zero-extended and subtracted from the contents of GPR *rx*. Considering both quantities as signed integers, if GPR *rx* is less than the zero-extended immediate, the result is set to 1 (true); otherwise, the result is set to 0 (false). The result is placed into GPR 24.

Restrictions:

None

Operation:


```

if GPR[Xlat(rx)] < zero_extend(immediate) then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

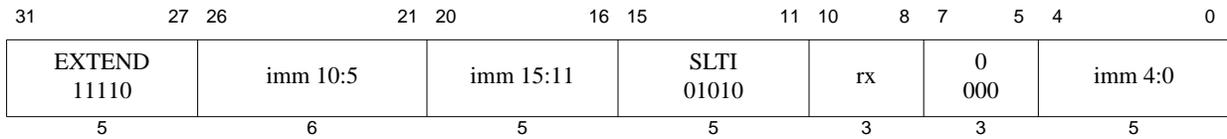

Format: SLTI *rx*, *immediate*

MIPS16e

Purpose: Set on Less Than Immediate (Extended)

To record the result of a less-than comparison with a constant.

Description: $T \leftarrow (GPR[rx] < immediate)$

The 16-bit *immediate* is sign-extended and subtracted from the contents of GPR *rx*. Considering both quantities as signed integers, if GPR *rx* is less than the sign-extended *immediate*, the result is set to 1 (true); otherwise, the result is set to 0 (false). The result is placed into GPR 24.

Restrictions:

None

Operation:


```

if GPR[Xlat(rx)] < sign_extend(immediate) then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

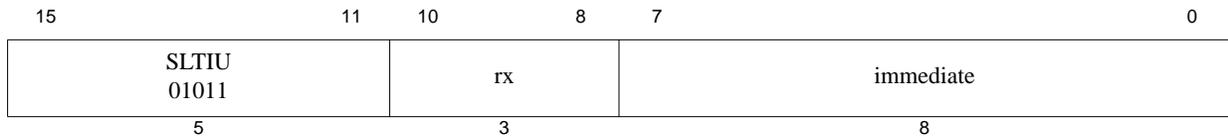

Format: SLTIU *rx*, *immediate*

MIPS16e

Purpose: Set on Less Than Immediate Unsigned

To record the result of an unsigned less-than comparison with a constant.

Description: $T \leftarrow (GPR[rx] < immediate)$

The 8-bit *immediate* is zero-extended and subtracted from the contents of GPR *rx*. Considering both quantities as unsigned integers, if GPR *rx* is less than the zero-extended *immediate*, the result is set to 1 (true); otherwise, the result is set to 0 (false). The result is placed into GPR 24.

Restrictions:

None

Operation:


```

if (0 || GPR[Xlat(rx)]) < (0 || zero_extend(immediate)) then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

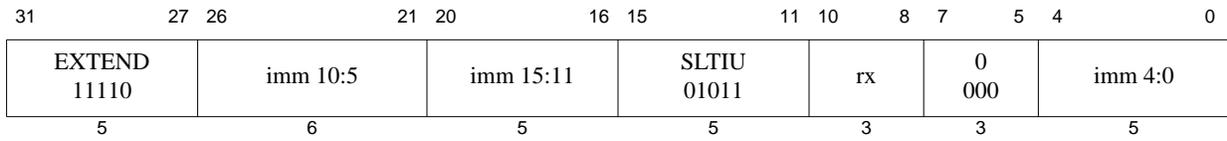

Format: SLTIU *rx*, *immediate*

MIPS16e

Purpose: Set on Less Than Immediate Unsigned (Extended)

To record the result of an unsigned less-than comparison with a constant.

Description: $T \leftarrow (GPR[rx] < immediate)$

The 16-bit *immediate* is sign-extended and subtracted from the contents of GPR *rx*. Considering both quantities as unsigned integers, if GPR *rx* is less than the sign-extended *immediate*, the result is set to 1 (true); otherwise, the result is set to 0 (false). The result is placed into GPR 24.

Restrictions:

None

Operation:


```

if (0 || GPR[Xlat(rx)]) < (0 || sign_extend(immediate)) then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

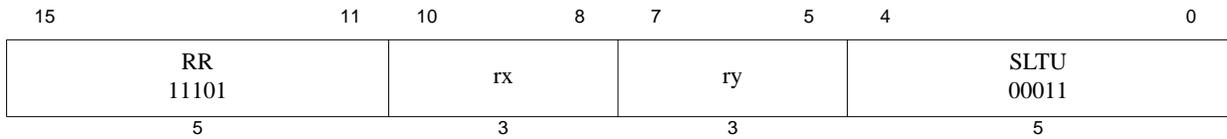

Format: SLTU rx, ry

MIPS16e

Purpose: Set on Less Than Unsigned

To record the result of an unsigned less-than comparison.

Description: $T \leftarrow (GPR[rx] < GPR[ry])$

The contents of GPR *ry* are subtracted from the contents of GPR *rx*. Considering both quantities as unsigned integers, if the contents of GPR *rx* are less than the contents of GPR *ry*, set the result to 1 (true); otherwise, set the result to 0 (false). The result is placed into GPR 24.

Restrictions:

None

Operation:


```

if (0 || GPR[Xlat(rx)]) < (0 || GPR[Xlat(ry)]) then
    GPR[24] ← 0GPRLEN-1 || 1
else
    GPR[24] ← 0GPRLEN
endif

```

Exceptions:

None

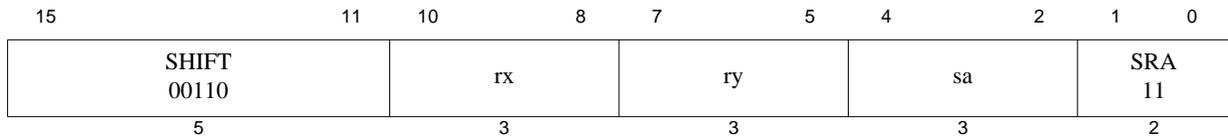

Format: SRA *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Right Arithmetic

To execute an arithmetic right-shift of a word by a fixed number of bits—1 to 8 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \gg sa$ (arithmetic)

The 32-bit contents of GPR *ry* are shifted right, and the sign bit is replicated into the emptied high-order bits. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8. The result is sign-extended and placed into GPR *rx*.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(ry)])) then
    UNPREDICTABLE
endif
s ← 02 || sa
if (s = 0) then
    s ← 8
endif
temp ← (GPR[Xlat(ry)]31)s || GPR[Xlat(ry)]31..s
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:

None

31	27 26	22 21	16 15	11 10	8 7	5 4	2 1 0
EXTEND 11110	sa4:0	0 000000	SHIFT 00110	rx	ry	0 000	SRA 11
5	5	6	5	3	3	3	2

Format: SRA *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Right Arithmetic (Extended)

To execute an arithmetic right-shift of a word by a fixed number of bits—0 to 31bits.

Description: $GPR[rx] \leftarrow GPR[ry] \gg sa$ (arithmetic)

The 32-bit contents of GPR *ry* are shifted right, and the sign bit is replicated into the emptied high-order bits. The 5-bit *sa* field specifies the shift amount. The result is sign-extended and placed into GPR *rx*.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```

if (NotWordValue(GPR[Xlat(ry)])) then
    UNPREDICTABLE
endif
s ← sa
temp ← (GPR[Xlat(ry)]31)s || GPR[Xlat(ry)]31..s
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:

None

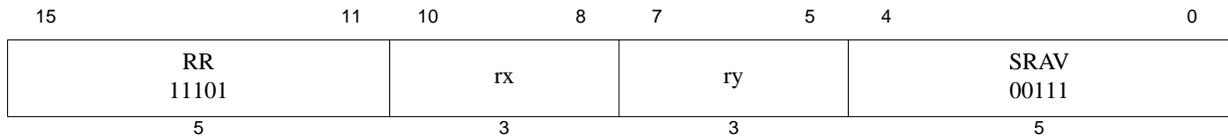

Format: SRAV *ry*, *rx*

MIPS16e

Purpose: Shift Word Right Arithmetic Variable

To execute an arithmetic right-shift of a word by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg GPR[rx]$ (arithmetic)

The 32-bit contents of GPR *ry* are shifted right, and the sign bit is replicated into the emptied high-order bits; the word result is sign-extended and placed back in GPR *ry*. The 5 low-order bits of GPR *rx* specify the shift amount.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```

if NotWordValue(GPR[ry]) then
    UNPREDICTABLE
endif
s ← GPR[Xlat(rx)]4..0
temp ← (GPR[Xlat(ry)]31)s || GPR[Xlat(ry)]31..s
GPR[Xlat(ry)] ← sign_extend(temp31..0)

```

Exceptions:

None

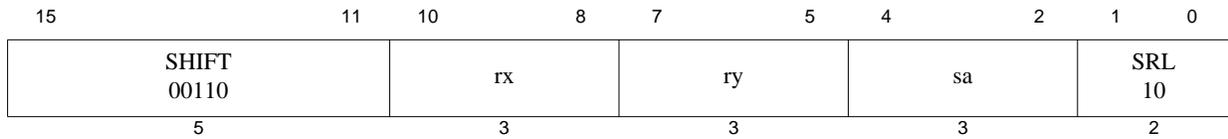

Format: SRL *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Right Logical

To execute a logical right-shift of a word by a fixed number of bits—1 to 8 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \gg sa$ (logical)

The 32-bit contents of GPR *ry* are shifted right, and zeros are inserted into the emptied high-order bits. The 3-bit *sa* field specifies the shift amount. A shift amount of 0 is interpreted as a shift amount of 8. The result is sign-extended and placed into GPR *rx*.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if NotWordValue(GPR[ry]) then
    UNPREDICTABLE
endif
if sa = 03 then
    s ← 8
else
    s ← 02 || sa
endif
temp ← 0s || GPR[Xlat(ry)]31..s
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:

None

31	27 26	22 21	16 15	11 10	8 7	5 4	2 1 0
EXTEND 11110	sa4:0	0 000000	SHIFT 00110	rx	ry	0 000	SRL 10
5	5	6	5	3	3	3	2

Format: SRL *rx*, *ry*, *sa*

MIPS16e

Purpose: Shift Word Right Logical (Extended)

To execute a logical right-shift of a word by a fixed number of bits—0 to 31 bits.

Description: $GPR[rx] \leftarrow GPR[ry] \gg sa$ (logical)

The 32-bit contents of GPR *ry* are shifted right, and zeros are inserted into the emptied high-order bits. The 5-bit *sa* field specifies the shift amount. The result is sign-extended and placed into GPR *rx*.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```

if NotWordValue(GPR[ry]) then
    UNPREDICTABLE
endif
s ← sa
temp ← 0s || GPR[Xlat(ry)]31..s
GPR[Xlat(rx)] ← sign_extend(temp31..0)

```

Exceptions:

None

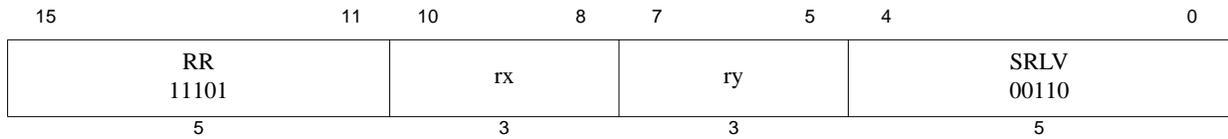

Format: SRLV *ry*, *rx*

MIPS16e

Purpose: Shift Word Right Logical Variable

To execute a logical right-shift of a word by a variable number of bits.

Description: $GPR[ry] \leftarrow GPR[ry] \gg GPR[rx]$ (logical)

The 32-bit contents of GPR *ry* are shifted right, and zeros are inserted into the emptied high-order bits; the word result is sign-extended and placed back in GPR *ry*. The 5 low-order bits of GPR *rx* specify the shift amount.

Restrictions:

On 64-bit processors, if GPR *ry* does not contain a sign-extended 32-bit value (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:


```

if (NotWordValue(GPR[Xlat(ry)])) then
    UNPREDICTABLE
endif
s ← GPR[Xlat(rx)]4..0
temp ← 0s || GPR[Xlat(ry)]31..s
GPR[Xlat(ry)] ← sign_extend(temp31..0)

```

Exceptions:

None

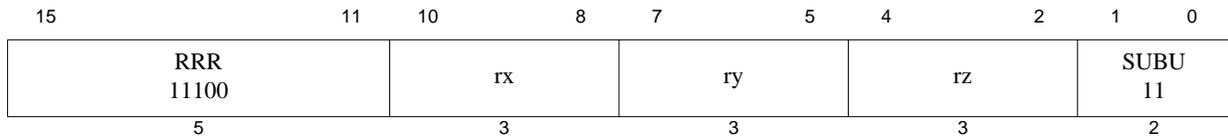

Format: SUBU *rz*, *rx*, *ry*

MIPS16e

Purpose: Subtract Unsigned Word

To subtract 32-bit integers.

Description: $GPR[rz] \leftarrow GPR[rx] - GPR[ry]$

The 32-bit word value in GPR *ry* is subtracted from the 32-bit value in GPR *rx* and the 32-bit arithmetic result is sign-extended and placed into GPR *rz*.

No integer overflow exception occurs under any circumstances.

Restrictions:

On 64-bit processors, if GPR *rx* or GPR *ry* does not contain sign-extended 32-bit values (bits 63..31 equal), then the result of the operation is **UNPREDICTABLE**.

Operation:

```

if (NotWordValue(GPR[Xlat(rx)]) or NotWordValue(GPR[Xlat(ry)])) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)] - GPR[Xlat(ry)]
GPR[Xlat(rz)] ← sign_extend(temp31..0)


```

Exceptions:

None

Programming Notes:

The term “unsigned” in the instruction name is a misnomer; this operation is 32-bit modulo arithmetic that does not trap on overflow. It is appropriate for unsigned arithmetic, such as address arithmetic, or integer arithmetic environments that ignore overflow, such as C language arithmetic.

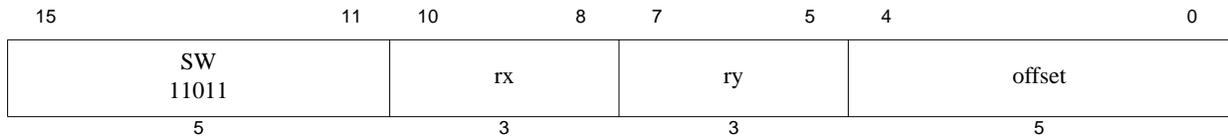

Format: `SW ry, offset(rx)`

MIPS16e

Purpose: Store Word

To store a word to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 5-bit *offset* is shifted left 2 bits, zero-extended, and then added to the contents of GPR *rx* to form the effective address. The contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 02) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[Xlat(ry)]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

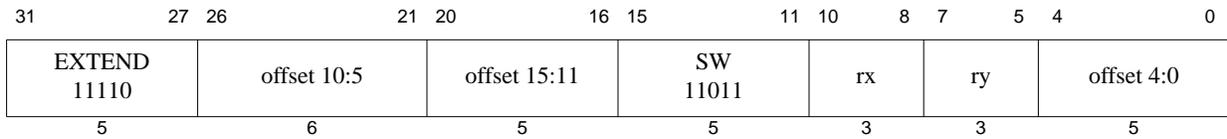

Format: `SW ry, offset(rx)`

MIPS16e

Purpose: Store Word (Extended)

To store a word to memory.

Description: $\text{memory}[\text{GPR}[\text{rx}] + \text{offset}] \leftarrow \text{GPR}[\text{ry}]$

The 16-bit *offset* is sign-extended and then added to the contents of GPR *rx* to form the effective address. The contents of GPR *ry* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[Xlat(rx)]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[Xlat(ry)]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

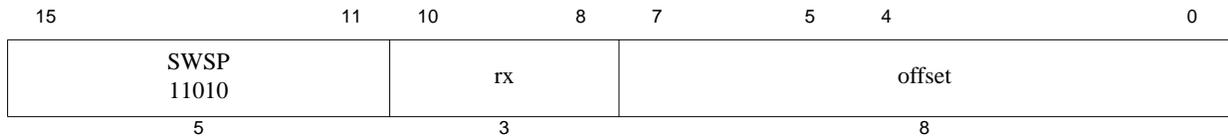

Format: `SW rx, offset(sp)`

MIPS16e

Purpose: Store Word *rx* (SP-Relative)

To store an SP-relative word to memory.

Description: `memory[GPR[sp] + offset] ← GPR[rx]`

The 8-bit *offset* is shifted left 2 bits, zero-extended, and then added to the contents of GPR 29 to form the effective address. The contents of GPR *rx* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← zero_extend(offset || 02) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[Xlat(rx)]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

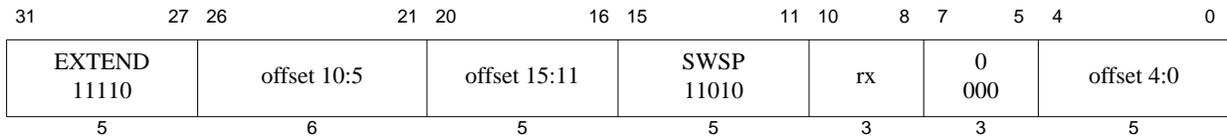

Format: `SW rx, offset(sp)`

MIPS16e

Purpose: Store Word *rx* (SP-Relative, Extended)

To store an SP-relative word to memory.

Description: `memory[GPR[sp] + offset] ← GPR[rx]`

The 16-bit *offset* is sign-extended and then added to the contents of GPR 29 to form the effective address. The contents of GPR *rx* are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the two least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation (vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[Xlat(rx)]63-8*bytesel..0 || 08*bytesel
StoreMemory (CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Bus Error, Address Error

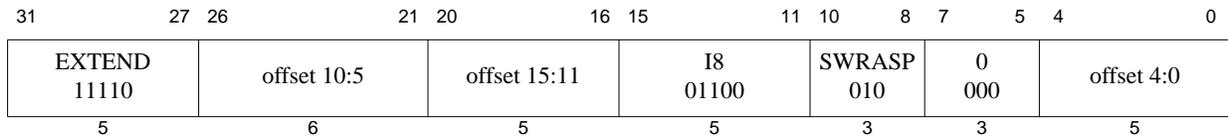

Format: `SW ra, offset(sp)`

MIPS16e

Purpose: Store Word *ra* (SP-Relative, Extended)

To store register *ra* SP-relative to memory.

Description: `memory[sp + offset] ← ra`

The 16-bit *offset* is sign-extended and then added to the contents of GPR 29 to form the effective address. The contents of GPR 31 are stored at the effective address.

Restrictions:

The effective address must be naturally-aligned. If either of the 2 least-significant bits of the address is non-zero, an Address Error exception occurs.

Operation:


```

vAddr ← sign_extend(offset) + GPR[29]
if vAddr1..0 ≠ 02 then
    SignalException(AddressError)
endif
(pAddr, CCA) ← AddressTranslation(vAddr, DATA, STORE)
pAddr ← pAddrPSIZE-1..3 || (pAddr2..0 xor (ReverseEndian || 02))
bytesel ← vAddr2..0 xor (BigEndianCPU || 02)
datadoubleword ← GPR[31]63-8*bytesel..0 || 08*bytesel
StoreMemory(CCA, WORD, datadoubleword, pAddr, vAddr, DATA)

```

Exceptions:

TLB Refill, TLB Invalid, TLB Modified, Address Error

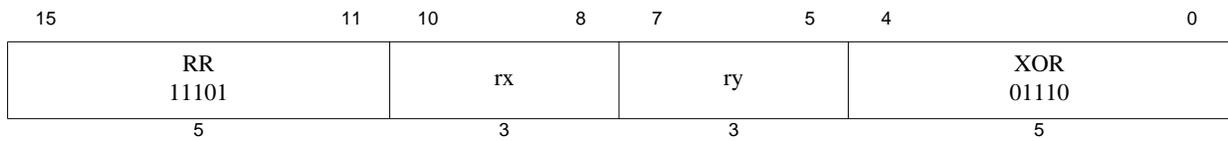

Format: XOR *rx*, *ry*

MIPS16e

Purpose: Exclusive OR

To do a bitwise logical Exclusive OR.

Description: $GPR[rx] \leftarrow GPR[rx] \text{ XOR } GPR[ry]$

The contents of GPR *ry* are combined with the contents of GPR *rx* in a bitwise Exclusive OR operation. The result is placed in GPR *rx*.

Restrictions:


None

Operation:

$$GPR[Xlat(rx)] \leftarrow GPR[Xlat(rx)] \text{ xor } GPR[Xlat(ry)]$$

Exceptions:

None

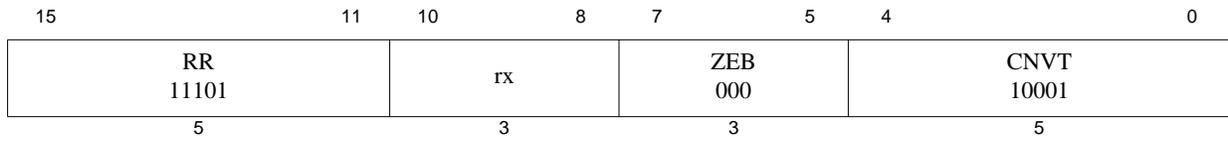

Format: ZEB rx

MIPS16e

Purpose: Zero-Extend Byte

Zero-extend least significant byte in register *rx*.

Description: $GPR[rx] \leftarrow zero_extend(GPR[rx]_{7..0});$

The least significant byte of GPR *rx* is zero-extended and the value written back to *rx*.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← 0 || temp7..0


```

Exceptions:

None

Programming Notes:

None

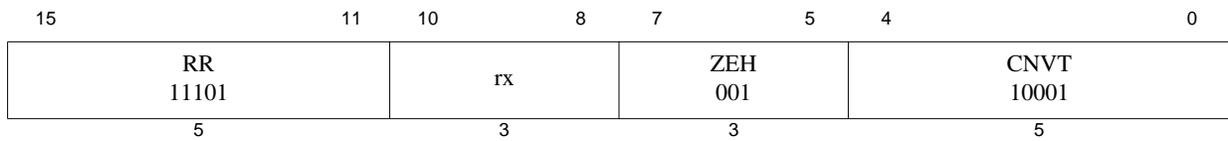

Format: ZEH rx

MIPS16e

Purpose: Zero-Extend Halfword

Zero-extend least significant halfword in register rx.

Description: $GPR[rx] \leftarrow \text{zero_extend}(GPR[rx]_{15..0});$

The least significant halfword of GPR *rx* is zero-extended and the value written back to *rx*.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← 0 || temp15..0


```

Exceptions:

None

Programming Notes:

None

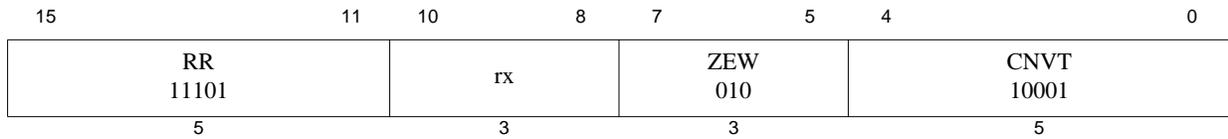

Format: ZEW rx

MIPS16e (64-bit only)

Purpose: Zero-Extend Word

Zero-extend least significant word in register *rx*.

Description: $GPR[rx] \leftarrow \text{zero_extend}(GPR[rx]_{31..0});$

The least significant word of GPR *rx* is zero-extended and the value written back to *rx*.

Restrictions:

Operation:

```

if NotWordValue(GPR[Xlat(rx)]) then
    UNPREDICTABLE
endif
temp ← GPR[Xlat(rx)]
GPR[Xlat(rx)] ← 032 || temp31..0

```

Exceptions:

Reserved Instruction

Programming Notes:

None

Revision History

In the left hand page margins of this document you may find vertical change bars to note the location of significant changes to this document since its last release. Significant changes are defined as those which you should take note of as you use the MIPS IP. Changes to correct grammar, spelling errors or similar may or may not be noted with change bars. Change bars will be removed for changes which are more than one revision old.

Please note: Limitations on the authoring tools make it difficult to place change bars on changes to figures. Change bars on figure titles are used to denote a potential change in the figure itself.

Revision	Date	Description
0.90	November 1, 2000	External review copy of reorganized and updated architecture documentation.
0.91	November 15, 2000	Changes in this revision: <ul style="list-style-type: none"> • Correct table 3-10 description of branch instructions (branches really are implemented in the 32-bit architecture and are extensible) • Correct the pseudo code for all MIPS16 branches - the offset value should be added to the address of the instruction following the branch, not the branch itself.
0.92	December 15, 2000	Changes in this revision: <ul style="list-style-type: none"> • Add missing I8_MOVER32 instruction format.
0.93	January 25, 2001	Changes in this revision: <ul style="list-style-type: none"> • Correct minor typos in the previous version. • Add the 32-bit MIPS version of JALX and update the instruction descriptions of JAL and JALX.
0.95	March 12, 2001	Document cleanup for next external release.
0.96	November 12, 2001	Changes in this revision: <ul style="list-style-type: none"> • Declassify the MIPS32 Architecture for Programmers volume. • Fix PDF bookmarks for the MIPS16 instructions. • Fix formatting in instruction translation section. • Correct the description of the shift count for extended SRA and SLL. • Change all uses of “MIPS16” to “MIPS16e”.
1.00	August 29, 2002	Changes in this revision: <ul style="list-style-type: none"> • Update pseudo code for SAVE and RESTORE to be explicit about the memory operations inherent in the instructions. • Correct extended PC-relative LW and LD to remove the implication that they can be executed in the delay slot of a jump. • Add section defining instruction fetch restrictions when the processor is running in MIPS16e mode and the fetch address is in uncached memory.

Revision History

Revision	Date	Description
2.00	May 15, 2003	Changes in this revision: <ul style="list-style-type: none">• For MIPS64 processors, add a programming note to ADDIUPC to indicate that this instruction will generate the expected result only when run in the 32-bit Compatibility Address Space.• For MIPS64 processors, clean up the input operand sign-extension requirements for ADDIUPC, ADDIUSP, ADDU, NEG, SEB, SEH, SEW, ZEB, ZEH, and ZEW.• Add a note to specify that the ISA Mode flag is made available to software in <i>EPC</i>, <i>ErrorEPC</i>, or <i>DEPC</i> when an exception occurs.• Clarify that for the purposes of Watchpoints and EJTAG Breakpoints, that PC-releative load references are consider data, not instruction, references.
2.50	July 1, 2005	Changes in this revision: <ul style="list-style-type: none">• Make it explicit that attempting to execute a non-extensible instruction must cause a Reserved Instruction exception. This was implied, but not explicitly stated in the previous revision of the document.• Update all files to FrameMaker 7.1.•
2.60	June 25, 2008	Changes in this revision: <ul style="list-style-type: none">• JALR.HB and JR.HB act like JALR and JR.